

Michael Kessler
Managing Assistant General Counsel
Direct Dial: 317-753-9434
Email: mkessler@misoenergy.org

August 28, 2026

VIA ELECTRONIC FILING

The Honorable Debbie-Anne Reese
Secretary
Federal Energy Regulatory Commission
888 First Street, NE
Washington, DC 20426

Re: Midcontinent Independent System Operator, Inc.'s Interconnection Reliability Requirements for Large Loads Docket No. ER26-___-000

Dear Secretary Reese:

The Midcontinent Independent System Operator, Inc. ("MISO"), through this filing,[1] submits proposed revisions to its Open Access Transmission, Energy and Operating Reserve Markets Tariff ("Tariff"),[2] to establish certain Interconnection Reliability Requirements for Large Loads (the "IRR Proposal").[3] The IRR Proposal is responsive to several of the concerns raised by the Commission in the Order Instituting Proceeding Under Section 206 of the Federal Power Act[4] in Docket No. EL26-70-000 by proposing visibility, ramp rate, and disturbance ride-through requirements applicable to Large Loads, along with transition provisions to minimize disruption to commercial arrangements. Other issues raised in the Show Cause Order, including the development of additional transmission products for Large Loads and associated study processes, cost shifting, protections against cost shifts and the treatment of generation service to electrically proximate to Large Loads, will be addressed through MISO's forthcoming Large Load proposals.

---

1 This filing is made pursuant to section 205 of the Federal Power Act ("FPA"), 16 U.S.C. § 824d, and Part 35 of the regulations of the Federal Energy Regulatory Commission ("FERC" or "Commission"), 18 C.F.R. § 35.1, *et seq*.

2 Unless otherwise indicated by the text or context of this transmittal letter, all terms used herein have the definitions set forth in Module A of the Tariff.

3 As discussed below, MISO proposes to defined Large Load as Load with Demand of 50 MW or more associated with any facility or aggregation of facilities located at a single substation behind one or more Point(s) of Withdrawal from the Transmission System that is owned, operated, or controlled by: (a) a single entity or (b) a group of entities that will coordinate with respect to the profile of the Load. Large Load does not include Load used exclusively for charging an Electric Storage Resource.

4 *Midcontinent Independent System Operator, Inc.,* Order Instituting Proceeding Under Section 206 of the Federal Power Act, 195 FERC ¶ 61,212 (2026) ("Show Cause Order" or "SCO").

MISO requests that the Tariff revisions submitted herewith be made effective December 4, 2026, which is not less than sixty (60) days nor more than one-hundred and twenty (120) days from the date of this filing. As discussed below and in the supporting testimony of Ms. BeiBei Li, action is needed in the near term to enhance the available tools to address the reliability impacts associated with the impending interconnection of Load, including the anticipated interconnection of significant Large Loads.

I. EXECUTIVE SUMMARY

The MISO region is experiencing a significant increase in both the scale and pace of Large Load development. MISO's 2026 Long-Term Load Forecast[5] indicates that the region is experiencing load growth at levels not seen in decades, driven in large part by unprecedented large load activity and accelerating project announcements. Data centers and advanced manufacturing are among the primary drivers of this growth, with some projects seeking to develop on timelines significantly shorter than those traditionally associated with generation and transmission infrastructure. This combination of increased volume and accelerated development is changing the manner in which MISO must plan for and reliably integrate new load.

As this growth has emerged, MISO, its member states, and stakeholders have been developing multiple initiatives to address evolving system conditions and to support timely, cost-effective and reliable interconnection of Large Loads. For example, MISO's Expedited Project Review (EPR) Process and Expedited Resource Addition Studies (ERAS) complement MISO's determination of needed additional transmission infrastructure, which are being planned and implemented through the Joint Targeted Interconnection Queue (JTIQ) and Long Range Transmission Plan (LRTP) processes. An additional and critical proposal, the Zero Injection Interconnection Agreement (ZGIA), is currently pending action at the Commission in Docket No. ER26-3552.

The issuance of the Commission's Show Cause Order has reinforced the value of MISO's prior efforts with stakeholders through the stakeholder process, including most recently the Large Load Working Group, to develop critical solutions to help support the cost-effective, reliable and efficient integration of Large Loads. MISO continues working diligently with stakeholders on several additional initiatives in response to the Show Cause Order and is committed to bringing those solutions to the Commission in a timely manner.

MISO appreciates the critical need to reliably integrate Large Loads. Recent whitepapers and alerts published by the North American Electric Reliability Corporation ("NERC") Large Loads Task Force and Large Loads Working Group identify emerging Large Loads as an increasing reliability consideration for the Bulk Electric System. NERC guidance highlights that traditional planning and operational assumptions developed for conventional load may not fully capture the

---

[5] *See* MISO's 2026 Long-Term Load Forecasting (LTLF) Results Summary (April 13, 2026), available at: https://cdn.misoenergy.org/20260413%20LTLF%20Workshop%202026%20Long%20Term%20Load%20Forecast%20Summary_UPDATED750524.pdf

behavior or reliability impacts of emerging large loads, particularly as load facilities grow, can change demand rapidly, and rely more heavily on power-electronic equipment.

While NERC processes are underway to develop industry wide guidelines, the MISO region cannot wait to put in place needed interconnection reliability requirements to reliably integrate these near-term Large Loads. Developing standards within the MISO region in advance of the NERC Standards process is not new. MISO has similarly acted in the past to establish requirements for the interconnection of inverter-based resources in advance of the development of NERC Standards relating to such resources. As Large Load growth accelerates across the MISO region these additional reliability considerations and processes are necessary to support transmission planning, operational preparedness, disturbance performance, and system stability, particularly given the unique characteristics of these facilities.

To support the integration of these new large loads into the MISO system, the IRR Proposal establishes a reliability-based framework for Large Loads that complements existing MISO planning, interconnection, and operational processes. The framework is designed to improve visibility into Large Load characteristics and behavior, support reliable planning and operational decision-making, and establish scalable and technically justified expectations proportional to demonstrated reliability risk. The proposed framework focuses on four categories of reliability requirements that will be applicable to Large Loads. The proposed reliability requirements will apply to MISO Transmission Customers providing Transmission Service the Large Load since the Transmission Customer is the entity that has a direct relationship with MISO. The four categories of reliability requirements are as follows:

1. **Visibility Requirements – Data, Modeling, Telemetry, and Forecasting Requirements:** These requirements establish expectations for facility information, electrical models, real-time telemetry, monitoring, short-term and forecasting, and other operational visibility requirements necessary to support planning studies, operational assessments, and accurate representation of Large Loads behavior and system impacts.

2 **Phasor Measurement Unit (PMU) Requirements:** In addition to the broader visibility requirements above, the PMU requirements establish enhanced monitoring expectations for Computation Loads through high-resolution, time-synchronized measurements. PMU data provides MISO with greater visibility into facility behavior during system disturbances and rapid operating changes, supporting model validation, performance verification, disturbance analysis, and identification of potential dynamic interactions with the Transmission System.

3. **Ramp Requirements:** These requirements address the rate at which Computational Loads may increase or decrease consumption during stable-state transitions. Managing rapid changes in demand helps reduce real-time supply-demand imbalances, sudden change in transmission power flows, and associated operational impacts, while supporting more reliable system operation. Ramp-rate

limits do not apply during fault or disturbance conditions when necessary for equipment protection or to satisfy ride-through performance requirements.

4. **Ride-Through Requirements:** These provisions establish minimum disturbance performance requirements applicable to Computational Load during voltage and frequency disturbances to reduce the risk of unnecessary disconnection or customer-initiated rapid reductions in Demands during credible system events.

MISO recognizes that the Commission also included the need to develop a study process that addresses the unique operational and reliability challenges that providing transmission service to Eligible Customers on behalf of large loads presents to the transmission system in its discussion of ongoing operational requirements in the Show Cause Order.[6] MISO currently conducts such studies as part of its stability assessment in the MTEP and EPR processes. The IRR Proposal addresses requirements applicable to Large Load facilities themselves. MISO intends to address enhancements to stability assessment study processes in a future Federal Power Act section 205 filing. Those future study processes will focus on identifying system-level reliability impacts associated with load additions and determining whether transmission or other system-level solutions are necessary, as part of a broader set of load addition and transmission service study requirements.

MISO appreciates the guidance provided by the Commission through the Show Cause Orders as well as its allowance for regional flexibility to develop tailored solutions that meet the underlying regional needs and that can support the underlying regional processes. The challenges and opportunities for large load integration differ across regions. MISO's expedited stakeholder process, in coordination with the MISO Transmission Owners and States, continues through the Large Load Working Group.

The previously submitted ZGIA filing and the instant IRR Proposal are the initial steps in a broader set of solutions to address the concerns expressed by the Commission in the Show Cause Order and to meet the evolving needs of the MISO region. In addition to the ZGIA and this IRR Proposal, MISO continues to develop a series of additional proposals that it plans to the Commission in advance of the November 16, 2026, deadline established based on the Commission's abeyance of the Show Cause Order. First, MISO is refining its Load Addition and Resource Study ("LARS") process to facilitate the parallel study of load and generation that will address service to proximate load and support critical speed to power needs. In addition, MISO is working to finalize its Firm Service Step Up proposal, which will provide a practical path to provide firm service increases over time as available. In addition, MISO will work with its Transmission Owners and the States to develop and submit the additional proposals to: 1) provide additional transmission service products to facilitate Large Load integration; 2) enhance the Large Load application and study processes; and, 3) develop additional provisions to address potential cost-shifts associated with Large Load additions.

---

[6] Show Cause Order at P 53.

II. BACKGROUND

A. Large Load Challenges

The United States is in the midst of an unprecedented energy transition. Large Load customers, including artificial intelligence ("AI") data centers and next-generation manufacturing technologies, are driving a surge in interconnection requests. [7] As NERC has observed, the largest contributor to this accelerated demand growth is data center additions, with 18 GW of data center loads projected by 2035.[8] The MISO region is no exception to this energy transition. Energy-intensive loads such as data centers, manufacturing expansion, and electrification are adding sustained, concentrated load at levels not seen in decades.[9] While electricity demand growth has been relatively flat with an annual average of just 0.5% between 2009 and 2024, MISO is projecting a substantial increase of 1% to 2% per year through 2044, with even higher growth rates in the near term.[10]

This growth has understandably drawn the focus of Relevant Electric Retail Rate Authorities ("RERRA"), stakeholders and federal policymakers. On January 23, 2025, President Trump issued an Executive Order stating, "[i]t is the policy of the United States to sustain and enhance America's global AI dominance in order to promote human flourishing, economic competitiveness, and national security."[11] On July 23, 2025, an Executive Order titled "Accelerating Federal Permitting of Data Center Infrastructure," the Trump Administration announced its intention to pursue bold, large-scale industrial plans to incentivize critical manufacturing and data center development:

> We will pursue bold, large-scale industrial plans to vault the United States further into the lead on critical manufacturing processes and technologies that are essential to national security, economic prosperity, and scientific leadership. These plans include artificial intelligence (AI) data centers and infrastructure that powers them, including high-voltage transmission lines and other equipment. It will be a priority of my Administration to facilitate the rapid and

---

7 Long-Term Reliability Assessment, NERC, at 15, 25 (Jan. 2026), *available at* https://www.nerc.com/globalassets/our-work/assessments/nerc_ltra_2025.pdf.

8 Long-Term Reliability Assessment, NERC, at 15 (Jan. 2026), *available at* https://www.nerc.com/globalassets/our-work/assessments/nerc_ltra_2025.pdf.

9 2026 Reliability Imperative Report, MISO, at. 4 (Feb. 2026), *available at* https://cdn.misoenergy.org/2026%20Reliability%20Imperative%20Report744320.pdf.

10 2026 Reliability Imperative Report, MISO, at 4 (Feb. 2026), *available at* https://cdn.misoenergy.org/2026%20Reliability%20Imperative%20Report744320.pdf.

11 Executive Order 14179 of January 23, 2025, "Removing Barriers to American Leadership in Artificial Intelligence," Federal Register 90 (20) 8741, www.govinfo.gov/content/pkg/FR-2025-01-31/pdf/2025-02172.pdf.

> efficient buildout of this infrastructure by easing Federal regulatory burdens.[12]

On October 23, 2025, the Secretary of Energy directed the Commission to consider an Advance Notice of Proposed Rulemaking ("ANOPR") focused on the timely and orderly interconnection of Large Loads to the interstate transmission system.[13] The Secretary's correspondence to the Commission in support of the ANOPR emphasized the importance of the timely, orderly, and non-discriminatory integration of Large Loads:

> To usher in a new era of American prosperity, we must ensure all Americans and domestic industries have access to affordable, reliable, and secure electricity. To do this, Large Loads, including AI data centers, served by public utilities must be able to connect to the transmission system in a timely, orderly, and non-discriminatory manner. This is an urgent issue that requires prompt attention.[14]

On June 18, 2026, the Commission issued the Show Cause Order.[15] The Show Cause Order recognizes the unprecedented increase in requests for transmission service to serve Large Loads along with the growing interest in co-location arrangements to serve those Large Loads.[16] As relevant to this filing, the Show Cause Order finds that MISO's Tariff appears to be unjust and unreasonable because it lacks provisions addressing ongoing operational requirements for transmission customers taking transmission service on behalf of Large Loads.[17] The Show Cause Order raises concerns that MISO's Tariff does not require transmission customers to provide MISO hourly forecasts, telemetry data, and other data to ensure sufficient visibility or specify requirements for maintaining communication channels between MISO and the transmission customer on behalf of the Large Load.[18] In addition, the Show Cause Order raises concerns that MISO's Tariff does not specify ramp rate or ride-through requirements with which the transmission customer taking transmission service on behalf of the Large Load must comply.[19] This filing proposes Tariff revisions establishing necessary ongoing operational requirements for Large Loads in response to the concerns stated in the Show Cause Order.

---

[12] Accelerating Federal Permitting of Data Center Infrastructure, Executive Order 14318, 90 FR 35385 (July 23, 2025), https://www.whitehouse.gov/presidentialactions/2025/07/accelerating-federal-permitting-of-data-center-infrastructure/.

[13] Letter from C. Wright, Secretary of Energy, to the Federal Energy Regulatory Commission, Docket No. RM26-4-000 (Oct. 23, 2025).

[14] Letter from C. Wright, Secretary of Energy, to the Federal Energy Regulatory Commission, Docket No. RM26-4-000 (Oct. 23, 2025).

[15] *See generally* Show Cause Order.

[16] *Id*. at P 1.


[17] *Id*. at P 64.

[18] *Id*. at P 64.

[19] *Id.* at P 64.

B. Addressing the Influx of Large Loads in the MISO Region

As noted above, the MISO region is experiencing a significant increase in both the scale and pace of Large Load development. As indicated in the chart below, MISO's 2026 Long-Term Load Forecast indicates that the region is experiencing load growth at levels not seen in decades, driven in large part by unprecedented large load activity and accelerating project announcements.[20] Data centers and advanced manufacturing are among the primary drivers of this growth, with some projects seeking to develop on timelines significantly shorter than those traditionally associated with generation and transmission infrastructure. This combination of increased volume and accelerated development is changing the manner in which MISO must plan for and reliably integrate new load.

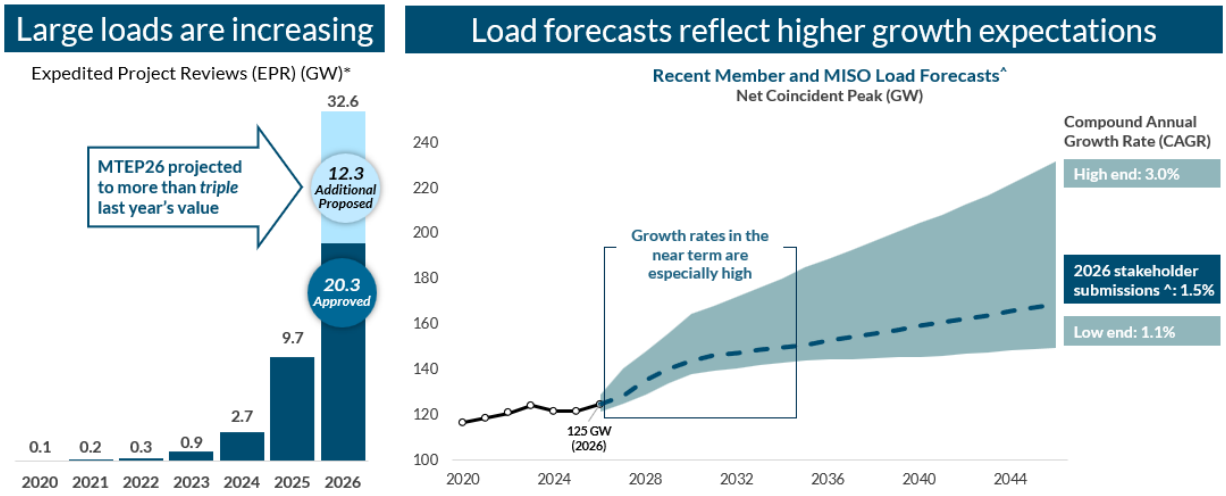

Recent whitepapers and alerts published by the NERC Large Loads Task Force and Large Loads Working Group identify emerging Large Loads as an increasing reliability consideration for the Bulk Electric System.[21] NERC guidance highlights that traditional planning and operational assumptions developed for conventional load may not fully capture the behavior or reliability impacts of emerging large loads, particularly as load facilities become larger, capable of rapid demand changes , and increasingly interconnected with power-electronic equipment.

---

[20] *See* MISO's 2026 Long-Term Load Forecast (updated August 17, 2026), available at: https://cdn.misoenergy.org/20260513%20LTLF%20Whitepaper757916.pdf.

[21] *See generally*, Essential Action to Industry – Computational Load Modeling, Studies, Instrumentation, Commissioning, Operations, Protection, and Control, NERC (May 4, 2026), *available at* https://www.nerc.com/globalassets/programs/bpsa/alerts/level-3-computational-load-alert.pdf; Draft large Load Disturbance Performance, NERC (Dec. 10, 2026), *available at* https://www.nerc.com/globalassets/who-we-are/standing-committees/rstc/llwg/draft_llwg_white_paper_large_load_disturbance_performance_tosubmit.pdf; Project 2026-02 Computational Load, NERC, https://www.nerc.com/standards/reliability-standards-under-development/2026-02-computational-loads (last visited Aug. 27, 2026).

Accommodating accelerated interconnection of Large Loads requires MISO to ensure that it can reliably plan for and operate the Transmission System as these facilities come online. Key reliability considerations include sufficient visibility into Large Load characteristics and operating behavior, accurate forecasting and modeling, and requirements that address operational risks, such as rapid change in Demand, disturbance response, including ride-through capability.

MISO, its member States, and a broad and diverse group of stakeholders have been developing multiple initiatives to address evolving system conditions and to support efficient and reliable interconnection of Large Loads prior to and after the issuance of the Show Cause Order. For example, MISO recently implemented the Expedited Resource Addition Study ("ERAS") as a targeted, temporary process to issue a Generator Interconnection Agreement in three months. MISO also improved its Transmission Expansion Plan's EPR process to quickly approve transmission upgrades necessary to address urgent needs associated with the addition of Large Loads. Further, MISO initiated the MISO-SPP Joint Targeted Interconnection Queue Study ("JTIQ"), which aims at building transmission network upgrades along the MISO-SPP seams to enable large amounts of new generation to come online in a more timely manner.

While these initiatives provide important benefits, they do not fully address the reliability and operational challenges associated with accelerating Large Load growth. Existing planning reforms primarily focus on generation additions and transmission development timelines. Likewise, broader reliability initiatives were not specifically designed to address the unique characteristics and operational challenges presented by Large Load and Computational Load additions. As the size and concentration of these facilities increase, additional visibility into load behavior and system interactions is necessary to support reliable operation of the Transmission System.

Accordingly, MISO recognizes that additional Tariff-based solutions are necessary to establish clear reliability expectations, improve operational visibility, and facilitate timely integration of Large Loads in a manner that is both reliable and non-discriminatory. These solutions must also consider and address the unique planning and operational characteristics of Large Load interconnection customers and hyperscale data centers, in particular.

MISO is moving quickly and engaging with stakeholders through the Large Load Working Group ("LLWG"), as well as with the Organization of MISO States, Inc. ("OMS"), in an expedited manner to develop the broader set of solutions outlined in the August 3, 2026, motion filed by MISO and the MISO Transmission Owners to hold all proceedings related to the Show Cause Order in abeyance for 90 days.[22] The Abeyance Motion explained that MISO and the MISO Transmission Owners required additional time to continue the stakeholder process and submit FPA

[22] Motion of the Midcontinent Independent System Operator, Inc. and the MISO Transmission Owners to Hold Proceeding in Abeyance and Request for Shortened Comment Period and Expedited Treatment, Docket No. EL26-70-000 (Aug. 3, 2026) ("Abeyance Motion").

section 205[23] filings that address the concerns raised in the Show Cause Order.[24] The Commission granted the 90-day abeyance requested in the Abeyance Motion on August 14, 2026.[25]

MISO has developed a prioritized work plan to accelerate consideration of the challenges presented by Large Load growth in the MISO region through its stakeholder process.[26] This process has resulted in the development of the IRR Proposal as well as ongoing discussion of additional solutions and improvements to various MISO processes, which MISO intends to submit for Commission review in a series of future Federal Power Act section 205 filings.[27]

III. OVERVIEW OF THE IRR PROPOSAL AND HOW IT ADDRESSES THE SHOW CAUSE ORDER

The IRR Proposal establishes broad categories of reliability requirements intended to address planning, operational and disturbance performance associated with Large Loads, along with new definitions, applicability and transition provisions necessary to implement the new requirements. A brief overview of each component of the filing is summarized below:

- **Definitions and Applicability:** Establishes which facilities qualify as Large Loads and Computational Loads and identifies when the requirements apply.

- **Data Requirements:** Establishes the facility and operational information MISO needs to understand Large Load characteristics and expected behavior.

- **Model Requirements:** Requires appropriate electrical models so Large Loads can be accurately represented in MISO planning and operational analyses.

- **Telemetry Requirements:** Provides real-time visibility into Large Load demand and operating conditions to support reliable system operations.

- **Forecasting Requirements:** Establishes short-term and other forecast information needed to anticipate Large Load demand and operating changes.

- **PMU Requirements for Computational Loads:** Provides high-resolution, time-synchronized measurements to support disturbance analysis, model validation, and performance verification.

---

23 16 U.S.C. § 824d.

24 Abeyance Motion at 2.

25 *Midcontinent Independent System Operator, Inc., et. al.,* 196 FERC ¶ 61,133 (August 14, 2026) ("Abeyance Order").

26 *Id*. at 4.

27 *Id*.

- **Ramp Requirements for Computational Loads:** Establishes limits on rapid increases or decreases in demand during stable-state transitions to help manage operational impacts.

- **Ride-Through Requirements for Computational Loads:** Establishes minimum voltage and frequency disturbance-performance expectations to reduce unnecessary disconnection and sudden load loss.

- **Implementation and Transitional Provisions:** Establishes compliance timing, responsibilities, and transition mechanisms for existing and developing facilities.

MISO further notes that this filing incorporates a proposed Tariff definition of "Large Load." This proposed definition is intended to apply to this filing as well as the other filings in response to the Show Cause Order, as applicable.

A. New Definitions Related to the IRR for Large Load

1. Large Load

The Order posits that MISO's Tariff appears to be unjust and unreasonable because it lacks a definition of Large Load sufficient to capture loads that present the unique challenges associated with Large Loads.[28] This filing proposes to address the Order's concern by implementing a clear and consistent Large Load definition, as follows:

> ***Large Load:*** Load with Demand of 50 MW or more associated with any facility or aggregation of facilities located at a single substation behind one or more Point(s) of Withdrawal from the Transmission System that is owned, operated, or controlled by: (a) a single entity or (b) a group of entities that will coordinate with respect to the profile of the Load. Large Load does not include Load used exclusively for charging an Electric Storage Resource.

As explained by Ms. Li, MISO developed the proposed Large Load definition through a review of emerging industry practices, consideration of the reliability needs in the MISO region, and stakeholder feedback.[29] Based on that review, MISO selected a 50 MW threshold as a reasonable and administratively clear starting point, consistent with industry precedent and sufficiently significant to warrant application of MISO's Large Load requirements. The definition is based on gross load rather than net load so that MISO has visibility into the full electrical demand and characteristics of the facility. Further, MISO defined Large Load at the facility or site level to allow loads under common ownership or coordinated operational control at a single site to be considered together, including where the site is served through multiple points of interconnection.

---

[28] Show Cause Order at P 57.

[29] Li Testimony at p 12-13.

In addition, Load used exclusively for charging an Electric Storage Resource is excluded as such Load does not create the operational challenges associated with industrial and Computational Load.[30]

2. Computational Load

This filing also proposes a new definition of Computational Load in order to further support the consistent interpretation of the proposed reliability framework described in this filing, as follows:

> ***Computational Load:*** Large Load comprised of 25 MW or more of Demand from information technology equipment, such as servers, storage, and networking hardware.

As explained by Ms. Li, the Computational Load definition distinguishes a subset of Large Loads that may exhibit operational characteristics different from more traditional loads, including rapid changes in demand, highly coordinated control behavior, and power-electronic responses during system disturbances.[31] This distinction allows MISO to apply certain incremental requirements—such as Ramp, PMU, and Ride-Through requirements—only where those characteristics warrant additional reliability consideration. The Computational Load definition is necessary as certain proposed requirements are intended to apply only to Large Loads with operating characteristics that warrant additional reliability consideration. Computational Loads may exhibit rapid and coordinated changes in demand, significant power-electronic behavior, and distinct responses to Transmission System disturbances. Defining Computational Load supports a more targeted and risk-informed approach, rather than applying the same requirements to all Large Loads regardless of facility type or operating behavior.

B. Applicability of the Interconnection Reliability Requirements

The requirements in this filing will apply to Large Loads as established in the MISO Tariff and the Business Practices Manual for Large Load. Subject to the transition provisions discussed below, all Large Loads will be subject to the applicable visibility requirements including: Basic Facility Data, Modeling, Telemetry, Forecast Data, and Audit requirements. In addition, the Computational Load component of a Large Load, as defined in the Tariff, is subject to the PMU, Ride-Through, and Ramp requirements. MISO recognizes that not all Large Loads present the same reliability risks and has limited the application of PMU, Ramp, and Ride-Through requirements to the Computational Load component of a Large Load, which reflects the increased operational risk Computational Loads place on the Transmission System. Ms. Li explains that the IRR Proposal is intended to provide a scalable and risk-informed framework that may be applied

---

[30] Exclusion of Load used exclusively for charging an Electric Storage Resource is consistent with the definition of High Impact Large Load accepted by the Commission in *Southwest Power Pool, Inc.,* 194 FERC ¶ 61,031, Order Accepting Tariff Revisions, Subject to Condition (Issued January 14, 2026).

[31] Li Testimony at p 13-14.

in a manner proportional to demonstrated reliability need, system conditions, and facility characteristics.[32]

The Transmission Customer taking Transmission Service on behalf of a Large Load will be responsible for ensuring compliance by the Large Load with each of the applicable requirements set forth in the new Tariff section 37A.[33] Requiring the Transmission Customer to ensure compliance with the requirements established in the IRR Proposal is consistent with the Show Cause Order's discussion of imposing requirements on an "Eligible Customer" and recognizes that the ultimate owner of a Large Load may not participate directly in MISO's markets or otherwise have contractual privity to MISO. All Large Loads interconnected to the Transmission System, however, will be required to procure Transmission Service, through a Transmission Customer, pursuant to the Tariff. As such, the Transmission Customer will be required to enter into a Transmission Service agreement, which incorporates by reference the terms of the Tariff, including the requirements proposed herein. As a result, applying the requirements established in the IRR Proposal to a Transmission Customer taking Transmission Service on behalf of a Large Load establishes a legally enforceable framework though which all reliability requirements imposed on a Large Load may be enforced.

The Show Cause Order indicates that MISO's Tariff appears to be unjust and unreasonable because it lacks *pro forma* provisions in a transmission service agreement between MISO and the transmission customer taking transmission service on behalf of a large load to memorialize the ongoing operational requirements similar to those proposed herein.[34] The Commission notes that, without such *pro forma* provisions in a transmission service agreement between MISO and the transmission customer, MISO may be unable to enforce ongoing operational requirements for transmission customers taking transmission service on behalf of large loads, and states that MISO should explain whether the Tariff remains just and reasonable without such *pro forma* provisions in a transmission service agreement, or propose revisions to include *pro forma* provisions memorializing the ongoing operational requirements in a transmission service agreement between MISO and the transmission customer.[35]

In response to these concerns, MISO notes that the existing *pro forma* agreements for Transmission Service under MISO's Tariff already incorporate the Tariff by reference.[36] As such,

---

[32] Li Testimony at p 17.

[33] The term "Transmission Customer" is currently defined in the Tariff as: Any Eligible Customer (or its Designated Agent) that (i) executes a Service Agreement, or (ii) requests in writing that the Transmission Provider file with the Commission, a proposed unexecuted Service Agreement to receive Transmission Service under Module B of this Tariff. This term is used in the Module A, Common Tariff Provisions to include customers receiving Transmission Service under Module B of this Tariff, including any customer receiving HVDC Service.

[34] Show Cause Order at P 65.

[35] *Id.*

[36] *See* MISO Tariff, Attachment A – Form of Service Agreement for Short-Term Firm Point-to-Point Transmission Service at 6.0 (The Tariff and any applicable Transaction Specification Sheet are incorporated herein and made a part hereof.), Attachment A-1 - Form of Service Agreement for Long-Term Firm Point-to-Point Transmission Service at 6.0 (The Tariff and any applicable Transaction Specification Sheet are incorporated herein and made

the Tariff will incorporate the requirements proposed herein in the applicable transmission service agreement for Transmission Service provided pursuant to the Tariff. In addition, the Tariff is being amended pursuant to Federal Power Act Section 205, which is an open, transparent process that provides notice to the Transmission Customer of proposed changes to the Tariff that will apply on the requested effective date.[37] As such, the Commission's concerns are addressed by the incorporation clause in the applicable transmission service agreements and that further revising the *pro forma* agreements to detail additional requirements would be unnecessary and disregard the flexibility afforded by the existing agreements.[38] This approach would also depart from prior practice and Commission precedent because it could result in assumed one-off application or requirements through the individual service agreement instead of the Tariff.

C. Transition Provisions

The Order states that any filing by MISO to address the Order's directives should "(a) propose a reasonable implementation period to ensure minimal disruption to such existing commercial arrangements, and (b) allow a reasonable amount of time to finalize ongoing agreements that are nearing completion as of the date such Tariff provisions are filed with the Commission. Such proposed Tariff revisions should include a reasonable effective date that accommodates such considerations regarding these existing commercial arrangements."[39]

Ms. Li provides that the IRR Proposal includes transition provisions that are intended to provide certainty to existing commercial arrangements and commercial arrangements that were near completion as of the date of this filing.[40] The requirements consider the Service Commencement Date of the Transmission Service to serve a Large Load, whether transmission projects or upgrades associated with the Large Load have been approved by the MISO Board in

---

a part hereof.), Attachment B - Form of Service Agreement for Non-Firm Point-to-Point Transmission Service at 8.0 (The Tariff and any applicable Exhibit WDS are incorporated herein and made a part hereof.), and Attachment F - Form of Service Agreement for Network Integration Transmission Service at 7.0 (The Tariff, Transaction Specification Sheet, Network Operating Agreement and Exhibit WDS are incorporated herein and made a part hereof.).

37 *See, e.g., W. Deptford Energy, LLC v. FERC*, 766 F.3d 10 (D.C. Cir. 2014) (discussing the "notice exception" to the filed rate doctrine the general rule that parties may be impacted by tariff revisions even without amendments to their contracts).

38 The Commission's regulations further support this distinction between a service agreement and the tariff under which service is provided. Under 18 C.F.R. § 35.2(c)(2), a "service agreement" is an agreement that "authorizes a customer to take electric service under the terms of a tariff." Thus, the service agreement does not necessarily fix the governing tariff as of the date of execution; rather, it authorizes service under the applicable tariff. That framework is reinforced by 18 C.F.R. § 35.28(c)(1) which requires transmission providers to maintain an OATT based on the Commission's *pro forma* tariff "as amended from time to time," and § 35.28(c)(4) specifically requires Commission-approved ISOs and RTOs to file revisions to their OATTs required by subsequent Commission rulemakings. Accordingly, the regulations contemplate that the tariff governing transmission service will continue to change after individual service agreements have been executed. *See* 18 C.F.R. §§ 35.28(c)(1) and (c)(4).

39 Show Cause Order at P 5.

40 Li Testimony at p 18-19.

MTEP 2026, or a prior MTEP, and when transmission projects or upgrades associated with the Large Load has been submitted to the MISO EPR process. This proposed approach recognizes the existing commercial arrangements and more immediate, non-speculative, nature of the Load additions and associated Transmission System upgrades.

The IRR Proposal proposes the following definition of "MTEP/EPR Condition" to facilitate the transition provisions proposed in this filing:

- For purposes of the transition provisions, Load will satisfy the "MTEP/EPR Condition" if it is associated with a transmission project that either: (a) has been approved by the MISO Board in MTEP 2026, or a prior MTEP; or, (b) has been submitted to MISO for EPR on or prior to June 18, 2026, in accordance with Attachment FF of the Tariff.

Based on this newly defined term, MISO proposes to implement the following three transition provisions through the IRR Proposal:

First, MISO proposes to fully exempt, or "grandfather," any Large Load that has a Service Commencement Date on or prior to December 4, 2026, from all requirements of the proposed Section 37A, with respect to the portion of the Large Load that has procured Transmission Service as of the Service Commencement Date. Any modification or series of modifications to a Load that meets the MTEP/EPR Condition, which results in a cumulative increase of 25 MW or more in Transmission Service for such Load and with a Service Commencement Date after December 4, 2026, may subject the additional Load to certain requirements, depending on METP / EPR approval date and the Service Commencement Date of the Transmission Service for the additional Load.

Second, MISO proposes that a Large Load, or a portion of a Large Load, that does not have a Service Commencement Date prior to December 4, 2026, but that meets the MTEP/EPR Condition shall be subject to the visibility requirements set forth in Sections 37A.1 through 37A.5 and Section 37A.8, and shall be exempt from the ramp and ride-through requirements set forth in Sections 37A.6 through 37A.7.

Third, MISO proposes that a Large Load, or a portion of Large Load, that does not have a Service Commencement Date prior to December 4, 2026, and that has not met the MTEP/EPR Condition, but has submitted Load associated with a transmission project to MISO for EPR on or after June 19, 2026, but on or before October 31, 2026, shall be subject to all requirements set forth in this Section 37A, provided that MISO may waive the ride-through requirements set forth in Section 37A.6 based upon a determination that: a) exemption from such requirements would not have an adverse reliability impact; and, b) compliance with such requirements would result in significant costs.

A Large Load that does not satisfy any of these transition provisions will be subject to all applicable reliability requirements, depending on whether the Large Load also qualifies as Computational Load.

D. The Ongoing Operational Requirements for Transmission Customers Taking Service on Behalf of Large Loads

The Order posits that MISO's Tariff appears to be unjust and unreasonable because it lacks provisions addressing ongoing operational requirements for transmission customers taking transmission service on behalf of Large Loads.[41] The Order identified several data and other operational requirements it states were absent from the Tariff, including: (i) hourly forecasts, telemetry data, and other data to ensure sufficient visibility or specify requirements for maintaining communication channels between MISO and the transmission customer on behalf of the Large Load; (ii) equipment to enable MISO to monitor Large Loads for impacts of, for example, fast-ramping load that may impact the transmission system too quickly to be captured by conventional data acquisition systems (e.g., phasor measurement units or similar); and (iii) specified ramp rate or ride-through requirements.[42] The Order also stated that MISO's Tariff lacks pro forma provisions in a transmission service agreement between MISO and the transmission customer taking transmission service on behalf of a Large Load to memorialize the above terms (e.g., equipment requirements, data requirements, remote disconnect capability).[43]

1. Basic Facility Data and Modeling Requirements

a. Reliability Objective

Ms. Li provides that the objective of the data and modeling requirements is to ensure sufficient visibility into the characteristics, operating behavior, and electrical performance of Large Loads necessary to support reliable planning, interconnection, commissioning, operations, and post-event analysis.[44] As emerging Large Loads increasingly exhibit dynamic operating characteristics, power-electronic interfaces, and concentrated demand, additional facility information, telemetry, and modeling detail may be necessary to evaluate reliability impacts under both normal and contingency conditions. Data and modeling requirements are intended to support reliable operation of the Transmission System by improving the accuracy of planning assumptions, strengthening operational awareness, supporting disturbance analysis and model validation, and enabling more consistent evaluation of system performance associated with Large Load integration. These requirements provide a framework for obtaining facility information, electrical models, telemetry, monitoring data, and operational visibility necessary to support planning studies, operational assessments, commissioning activities, and reliability evaluations.

Consistent with emerging industry practices and North American Electric Reliability Corporation ("NERC") guidance, data and modeling expectations are intended to be scalable and

---

41 Show Cause Order at P 64.

42 *Id.*

43 *Id.* at P 65.

44 Li Testimony at p 24.

risk-informed and may vary based on facility characteristics, operating behavior, system conditions, and demonstrated reliability need.

b. Applicable Requirements

i. Facility Data

The Transmission Customer will be responsible for providing MISO with basic information, one-line diagrams, and a description of the electrical characteristics of the Large Load for all Large Load Equipment, in the format and consistent with the timelines specified in the Business Practice Manual for Large Load. Any changes to the characteristics of a Large Load and/or Large Load Equipment, including any changes to the modeling details for the Large Load, shall be provided to MISO in a timely manner, consistent with the Business Practices Manual for Large Load. Such changes may include, but are not limited to, Load MW amounts, firm and non-firm MW amounts, any dispatchable Load MWs, power factor, metering, telemetry, breaker configuration, staged additions and annual energy as further set forth in the Business Practices Manual for Large Load.

The Transmission Customer must coordinate with the Transmission Owner where the Large Load Point of Withdrawal is located pursuant to MISO's load interconnection guidance and applicable NERC standards.

Together, these requirements help ensure that MISO has current and accurate facility information to support planning and reliable operation of the Transmission System.[45]

ii. Modeling Data

The Transmission Customer will be responsible for providing MISO with verified and complete electrical models of the Large Load, as well as detailed Load profiles, for modeled Loads, in the format and consistent with the timelines specified in the Business Practice Manual for Transmission Planning. Such model information must include sufficient detail for MISO to evaluate system performance under contingency conditions in accordance with currently active versions of Transmission System Planning Performance Standards.

Following completion of applicable studies and prior to the Service Commencement Date of the Large Load, the Transmission Customer will be responsible for providing final verified models to MISO in accordance with the Business Practices Manual for Large Load. The Transmission Customer will be responsible for providing notice to MISO of any material modifications to the Large Load and shall not implement any such proposed modifications until studied and approved by MISO in accordance with the Business Practices Manual for Large Load.

---

[45] Li Testimony at p 24.

The final models of a Large Load shall reflect the as-built configuration and actual operating characteristics of the Large Load and Large Load Equipment. The Transmission Customer shall maintain and update models as required by MISO.

Together, these requirements help ensure that MISO's planning and reliability studies are based on current and representative Large Load models.

2. Load Forecasting Requirements

a. Reliability Objective

Ms. Li explains that Demand from Large Loads can fluctuate rapidly due to operational processes, making system conditions difficult to predict solely from historical weather or calendar data .[46] To preserve reliable commitment and dispatch, Transmission Customers serving Large Loads must provide timely, granular, and continuously updated short-term forecasts that MISO can ingest at CPNode level and use across Reliability Assessment Commitment (RAC) and Security Constrained Economic Dispatch (SCED) processes, along with other reliability studies. These submissions give operators forward visibility into expected demand, enabling risk-aware commitment, real-time balancing, reserve sufficiency, and local reliability under changing system conditions.

b. Applicable Requirements

Prior to the later of the Service Commencement Date of a Large Load or September 1, 2027, the Transmission Customer must provide day(s) ahead and real-time Load Forecasts for a Large Load directly to MISO to support the RAC and SCED processes, along with other reliability studies. Given the sizable reliability impact a Large Load may have on the Transmission System, the Load Forecasts shall be updated to reflect the most current information on the expected Demand, in accordance with the Business Practices Manual for Large Load.

3. Telemetry and Phasor Measurement Unit (PMU) Requirements

a. Reliability Objective

Ms. Li explains that the objective of telemetry and PMU requirements is to ensure that MISO and Transmission Owners maintain real-time, continuous, high-resolution visibility into Large Load behavior through accurate SCADA/ICCP data and time-synchronized phasor measurements.[47]

Because emerging Large Loads can change real and reactive power rapidly and exhibit power-electronic-driven dynamic responses during disturbances, telemetry and, at a minimum, PMU live streaming enable operators to identify abnormal voltage, frequency, or oscillatory

[46] Li Testimony at p 26.

[47] Li Testimony at p 26-28.

conditions early, validate and refine modeling assumptions, support balancing and contingency analysis, and respond effectively before issues propagate across the Bulk Electric System. Reliable, real-time telemetry strengthens MISO's ability to manage system stability, operational uncertainty, and disturbance performance under both normal and stressed conditions, ensuring that Large Loads integrate safely and predictably into the grid.

MISO addressed several considerations to support the telemetry reliability objective, including the following:

- Sampling Rate and Data Quality: High-resolution sampling (e.g., PMU-level >60 samples per second) is necessary to capture fast voltage, frequency, and real/reactive power changes characteristic of power-electronic Large Loads.
- SCADA/ICCP Update Frequency: SCADA telemetry should provide sufficiently frequent updates to support operational situational awareness and real-time reliability assessments.
- Phasor Measurement Unit (PMU) Integration: PMUs should be installed at the Transmission Owner side of the Point of Withdrawal to capture time-synchronized voltage/current phasors and event signatures that SCADA cannot detect.
- Location of Telemetry Measurement Devices: Telemetry equipment should be installed at Point of Withdrawal.
- Communications Infrastructure & Latency: Sufficient bandwidth, redundant communication paths, and low latency data streaming are essential for ensuring real-time visibility, especially for PMU data that should remain tightly time-aligned.
- Time Synchronization Requirements: PMUs should maintain GPS-quality time synchronization to support system-wide correlation of events and dynamic monitoring.
- Compatibility with MISO Telemetry Specifications: All telemetry should align with MISO's ICCP, PMU streaming, and EMS data validation requirements as documented in relevant BPMs and LLWG guidance.

b. Applicable Requirements

MISO is proposing to implement the following Telemetry and PMU requirements and procedures applicable to Large Load Customers:

1. Prior to the later of the Service Commencement Date of a Large Load or September 1, 2027, a Transmission Customer must provide real-time telemetry for the Large Load, either directly, through the applicable Transmission Owner, or other Transmission Provider-approved communication path, in the form and manner as set forth in the Business Practices Manual for Large Load.

2. Individual metering will be required for all Large Load and any Generation Resource(s) serving such Large Load that is located behind the same Point of Interconnection to the

Transmission System as the Large Load and meeting thresholds outlined in the Business Practices Manual for Large Load. All telemetry shall be provided via Inter-Control Center Communications Protocol (ICCP) and must meet Transmission Provider update requirements as specified in the Business Practices Manual for Large Load. The Transmission Customer must use commercially reasonable efforts to maintain telemetry availability and accuracy for the Large Load and must promptly correct erroneous data, bad mappings, and ICCP modeling issues.

3. The Transmission Owner must provide disturbance monitoring and event recording capability sufficient to support post-event analysis, model validation, and reliability assessment.

In addition to the requirements described above, Computational Load will be subject to the following Phasor Measurement Unit (PMU) requirements. Prior to the later of the Service Commencement Date of a Large Load or September 1, 2027, phasor measurement recording and communications equipment that is capable, at a minimum, of gathering phasor measurements must be installed as specified in Business Practices Manual for Large Load. To the extent similar quality equipment is being added or already exists, such as relays or digital fault recorders, that can collect data at least at the same rate as PMU and which data is synchronized via a high-accuracy satellite clock, such equipment may be utilized to satisfy this requirement if the equipment is located on the Transmission Owner's side of the Point(s) of Withdrawal. The phasor measurement equipment must be installed at the Transmission Owner's side of the Point(s) of Withdrawal, at the Transmission Customer's expense, and become part of the Transmission Owner interconnection facilities.

4. Ramp Requirements

a. Reliability Objective

Ms. Li provides that the reliability objective of the ramp requirements is to manage operational impacts that can result when a Computational Load increases or decreases its Demand rapidly during stable-state transitions.[48] Computational Loads may have the capability to change significant amounts of demand over a relatively short period of time and, in some cases, to do so in a highly coordinated manner. Rapid changes of this magnitude can create short-term supply-demand imbalances, cause sudden changes in transmission power flows, and increase the operational actions needed to maintain reliable system conditions.

Establishing reasonable limits on the rate at which a Computational Load may increase or decrease its Demand provides an established operating envelope within which MISO can maintain generation-load balance and ensure the coincident risk of multiple Computational Loads does not result in broader reliability impacts.

---

[48] Li Testimony at p 30-31.

The proposed ramp requirements are intended to ensure that changes in Computational Load demand occur at a rate that can be reliably accommodated by the Transmission System. The requirements establish up- and down-ramp limits during stable-state transitions, measured in aggregate across the applicable Points of Withdrawal, while allowing eligible generation or other resources to provide ramp smoothing. MISO is proposing initial up- and down-ramp limits of 30MW/minute.

b. Applicable Requirements

Computational Load will be subject to up-ramp and down-ramp limits during the stable-state transitions, measured in aggregate across the applicable Point(s) of Withdrawal, while allowing eligible generation or other resource to provide ramp smoothing, consistent with the process set forth in the Business Practices Manual for Large Load. The process to establish up-ramp and down-ramp limits for a Computational Loads will consider local planning criteria and will include a procedure for MISO to authorize or instruct deviations as may be needed to preserve reliability.

5. Ride-Through Requirements

a. Reliability Objective

Ms. Li explains that the objective of ride-through requirements is to reduce the risk of unnecessary Computational Load disconnection or rapid changes in Demand during voltage and frequency disturbances and support predictable disturbance performance during credible Transmission System events.[49] As emerging Large Loads increasingly include power-electronic interfaces, fast controls, and dynamic operating behavior, disturbance response may materially affect system performance, operational reliability, and post-contingency recovery.

Ride-through requirements are intended to support reliable operation of the Transmission System by improving disturbance resilience, reducing operational uncertainty associated with sudden changes in Computational Load demand, and promoting more predictable facility behavior during transmission disturbances. These requirements establish minimum performance expectations for the Computational Load component of a Large Load to maintain connection and stable operation during voltage and frequency excursions, while supporting system voltage recovery, frequency performance, and overall system stability.

Consistent with emerging industry practices and NERC guidance, the proposed ride-through expectations are intended to establish scalable and reliability-based performance criteria proportional to demonstrated system risk and facility operating characteristics.

b. Applicable Requirements

---

[49] Li Testimony at p 32.

i. General Principles

Ride-through requirements apply at the facility's Point(s) of Withdrawal (PoW(s)) and establish the voltage and frequency conditions under which a Computational Loads are required to remain connected to the Transmission System and continue operation during disturbances. When system conditions remain within the specified ride-through performance limits, Computational Loads are expected to remain connected and maintain stable operation without unnecessary interruption of service. As Ms. Li notes, protection and control systems should be coordinated to avoid unnecessary tripping, and momentary cessation is not permitted unless explicitly allowed. Following disturbance clearance, Computational Loads are expected to recover toward pre-disturbance operating conditions in a controlled manner consistent with established performance expectations.[50]

Ms. Li explains that the Tariff revisions proposed herein establish the core ride-through obligations, while the technical basis and detailed application of performance criteria supporting the ride-through requirements are described in MISO's published Large Load Technical Compendium, which will be incorporated into MISO's Business Practices Manual for Large Load prior to the effective date of the IRR Tariff provisions.[51] MISO is continuing to work with stakeholders on implementation details to be included in the BPM, which will address the following items:

- Applicability: Applies to Computational Loads subject to MISO's ride-through requirements.
- Stay connected: Requires the facility to remain connected during qualifying voltage and frequency disturbances.
- Stable operation: Requires the facility to maintain stable behavior during the disturbance and avoid unnecessary tripping.
- Post-disturbance recovery: Requires active power to recover in a controlled manner that supports reliable Transmission System operation.
- Demonstration of capability: Requires the Transmission Customer to provide models, studies, equipment information, testing, or other evidence demonstrating compliance.

IV. DESCRIPTION OF PROPOSED TARIFF REVISIONS

A. Module A (Common Tariff Provisions). MISO is proposing to add several new terms and definitions to Module A, as follows:

---

[50] Li Testimony at p 32-33.

[51] Li Testimony at p 33-34.

1. ***Computational Load:*** Large Load comprised of 25 MW or more of Demand from information technology equipment, such as servers, storage, and networking hardware.

2. ***Large Load Equipment:*** Any of the facilities, devices, or equipment that constitutes a part of a Large Load, or are used to interconnect the Large Load to the Transmission System.

3. ***Large Load:*** Load with Demand of 50 MW or more associated with any facility or aggregation of facilities located at a single substation behind one or more Point(s) of Withdrawal from the Transmission System that is owned, operated, or controlled by: (a) a single entity or (b) a group of entities that will coordinate with respect to the profile of the Load. Large Load does not include Load used exclusively for charging an Electric Storage Resource.

4. ***Point(s) of Withdrawal:*** The point(s) where a non-transmission facility that is used to withdraw Energy from the Transmission System to serve Load connects to the Transmission System.

MISO respectfully submits that these proposed definitions are just, reasonable, and necessary to implement the IRR Proposal in a clear and consistent manner. The terms were presented to stakeholders and iterated through MISO's stakeholder process. MISO worked with stakeholders on the definition of Large Load and related terms (i.e., Large Load Equipment, Point(s) of Withdrawal, and Computational Load) and refined those terms in response to stakeholder feedback. The proposed terms represent a reasonable resolution of disputed issues relating to the definition of a "Large Load," including considerations of the unique operational characteristics of Large Loads and the unique considerations within the MISO region. The proposed terms also provide clarity to stakeholders, MISO, and the Commission as MISO works to fully address the concerns identified in the Order while ensuring that Large Loads interconnect in a reliable manner.

B. Module B (Transmission Service). MISO is requesting approval to add new provisions to Module B, as follows:

1. Section 37A (Applicability of Large Load Reliability Requirements): MISO is proposing to implement a new subsection titled "Applicability of Large Load Reliability Requirements." This proposed subsection explains that all Large Load shall be subject to certain requirements as set forth in Sections37A.1 through 37A.4 and section 37A.8 of the Tariff, which are discussed below. The proposed subsection also explains that Computational Load shall be subject to the requirements in Sections 37A.5 through 37A.7 of the Tariff, described below. Proposed Section 37A specifies that the Transmission Customer shall be responsible for complying with the requirements of Section 37A and shall demonstrate its ability to effectuate compliance with Section 37A. Proposed

Section 37A further explains that failure to comply with applicable requirements may result in a delayed Service Commencement Date, a period of time needed for corrective action, operational limitations, or other remediation action(s) by Transmission Provider as may be necessary to maintain Transmission System reliability. This section also contains the Transition Provisions as discussed above.

MISO proposes this Section 37A in order to implement clear guidelines as to the applicability of the proposed requirements and to identify responsible entities. Because Large Load interconnections implicate multiple parties, clarity on those parties' responsibilities and obligations is needed to streamline the interconnection process and ensure speed to power. Further, clarity is required as to potential consequences in the event a party fails to comply with applicable requirements.

2. Section 37A.1 (Large Load Information and Basic Facility Data Requirements): MISO is proposing a new subsection addressing Large Load information and basic facility data requirements. This proposed subsection explains that the Transmission Customer is responsible for providing the Transmission Provider with basic information, one-line diagrams, and a description of the electrical characteristics of the Large Load for all Large Load Equipment, in the format and consistent with the timelines specified in the Business Practice Manual for Large Load. The proposed subsection specifies that any changes to the characteristics of a Large Load and/or Large Load Equipment shall be provided to the Transmission Provider in a timely manner, consistent with the Business Practices Manual for Large Load. The proposed subsection further clarifies that the Transmission Customer must coordinate with the Transmission Owner where the Lare Load Point(s) of Withdrawal is located pursuant to applicable interconnection guidance and NERC standards.

MISO proposes this Section 37A.1 in order to clearly identify the Large Load information and basic facility data requirements needed to reliably interconnect a Large Load. The proposed subsection clearly assigns responsibility among the Transmission Customer, Transmission Provider, and Transmission Owner, while assigning certain implementation details to the applicable Business Practice Manual. MISO submits this subsection strikes a reasonable balance of providing sufficient guidance to applicable parties regarding the Large Load information and basic facility data requirements, while offering flexibility by leaving the implementation details to refinement in the Business Practices Manual.

3. Section 37A.2 (Large Load Modeling Requirements): MISO is proposing a new subsection detailing the modeling requirements applicable to Large Loads. This proposed subsection explains that the Transmission Customer shall provide the Transmission Provider with verified and complete electrical models of the Large Load, as well as detailed Load profiles, for modeled Loads, in the format and consistent with the timelines specified in the Business Practice Manual for Transmission Planning. The proposed subsection clarifies that this model

information must include sufficient detail for Transmission Provider to evaluate system performance under contingency conditions in accordance with currently active versions of Transmission System Planning Performance Standards. The proposed subsection states that, following completion of applicable studies and prior to the Service Commencement Date of a Large Load, the Transmission Customer shall submit final verified models to the Transmission Provider in accordance with the Business Practices Manual for Large Load and provide notice to the Transmission Provider of any material modifications to the Large Load. The proposed subsection states that the final models of a Large Load shall reflect the as-built configuration and actual operating characteristics of the Large Load and Large Load Equipment, which the Transmission Customer must maintain and update as required by the Transmission Provider.

MISO proposes this Subsection 37A.2 to provide clear modeling requirements, while further addressing the implementation details of those models to the applicable Business Practices Manual. The modeling requirements are reasonable and ensure that the Transmission Provider receives the information necessary to model a proposed Large Load interconnection request, while receiving updates to any relevant features of that proposed Large Load. This proposed subsection strikes an appropriate balance of detail between the Tariff and implementation details in the Business Practices Manual by clearly assigning responsibility to the Transmission Customer for developing and providing modeling information, and updating its submission in response to changed circumstances.

4. Section 37A.3 (Large Load Telemetry Requirements): MISO is proposing a new subsection detailing the telemetry requirements applicable to Large Loads. The proposed subsection specifies that telemetry must be in real-time, provided via an appropriate communication path, and submitted in the form and manner set forth in the Business Practices Manual for Large Load. The proposed subsection states that individual metering will be required (both for Large Load and any Generation Resource(s) serving such Large Load at the same POI), and that all telemetry will be provided by via Inter-Control Center Communications Protocol (ICCP) and must meet Transmission Provider update requirements as specified in the Business Practices Manual for Large Load. The subsection states that the Transmission Owner must provide disturbance monitoring and event recording capabilities.

MISO proposes this Subsection 37A.3 to provide clear telemetry requirements, while affording the flexibility to address implementation details in the Business Practices Manual. The telemetry requirements are reasonable and transparent, and provide sufficient visibility to ensure the reliable interconnection of a Large Load. The proposed subsection provides an appropriate balance of detail between the Tariff and implementation details in the Business Practices Manual by identifying the requirements for telemetry and assigning responsibility to the applicable parties.

5. Section 37A.4 (Large Load Forecast Data Requirements): MISO is proposing a new subsection detailing the forecast data requirements for a Large Load. The

proposed subsection provides that, before the Service Commencement Date of a Large Load or September 1, 2027 (whichever is later), the Transmission Customer must provide day(s) ahead and real-time Load Forecasts for a Large Load directly to the Transmission Provider to support the Reliability Assessment Commitment (RAC) and Security Constrained Economic Dispatch (SCED) processes, along with other reliability studies. The Load Forecasts must be updated to reflect the most current information on the expected Demand, in accordance with the Business Practices Manual for Large Load.

MISO proposes this Subsection 37A.4 to ensure that Transmission Customers provide sufficient forecast data for a Large Load to MISO to support reliability efforts. The subsection also ensures MISO receives accurate, and up-to-date information by requiring the Transmission Customer to supplement its forecast data with the most current information. The proposed subsection strikes the appropriate balance of providing all parties with sufficient detail regarding the proposed forecast data requirements while leaving implementation details to the Business Practices Manual.

6. Section 37A.5 (Large Load Phasor Measurement Unit Requirements): MISO is proposing a new subsection detailing the PMU requirements for Large Loads. The proposed subsection states that Computational Load is subject to the PMU requirements. The subsection requires PMU and recording information to be installed before the Service Commencement Date of a Large Load or September 1, 2027 (whichever is later), and requires that this equipment gather the requirements specified in the Business Practices Manual. The proposed subsections allow for the use of existing equipment to meet these requirements, provided that equipment can collect data at the same rate as PMU and which data is synchronized via a high-accuracy satellite clock. The proposed subsection specifies that the PMU equipment must be installed at the Transmission Owner's side of the Point(s) of Withdrawal and become part of the Transmission Owner interconnection facilities.

MISO proposes this Subsection 37A.5 to implement PMU requirements for Large Loads. The subjection ensures that those PMU requirements are satisfied by either the installation new equipment or a demonstration that existing equipment can serve substantially the same purpose. The subsection thus strikes a reasonable balance of requiring the installation of new equipment with grandfathering existing equipment that serves substantially the same purpose. The proposed subsection also strikes the appropriate balance of providing all parties with sufficient detail of the PMU requirements while leaving implementation details to the Business Practices Manual.

7. Section 37A.6 (Large Load Ride-Through Requirements): MISO is proposing a new section for Large Load ride-through requirements. The proposed subjection provides that Computational Load shall remain connected to the Transmission System and continue operation during voltage and frequency disturbances within the performance criteria established by the Transmission Provider in the Business Practices Manual for Large Load. The proposed

subsection also specifies that ride-through requirements apply at the Point(s) of Withdrawal and may include evaluation, testing, modeling, monitoring, and other compliance measures established by the Transmission Provider in the Business Practices Manual for Large Load.

MISO proposes this Subsection 37A.6 to clearly delineate the ride-through requirements for Computational Load. The proposed subsection provides clear guidance to Computational Loads and explains where those ride-through requirements will apply. The proposed subsection also strikes the appropriate balance of providing all parties with sufficient detail of the ride-through requirements while leaving implementation details to the Business Practices Manual.

8. Section 37A.7 (Large Load Ramp Requirements): MISO is proposing a new subsection to impose Large Load ramp requirements. The proposed subsection states that Computational Load is subject to the requirements. Ramp limits shall be measured in aggregate across the applicable Point(s) of Withdrawal during stable-state transition, including any reduction/ramp smoothing provided by generation or other resources that meets the eligibility requirements specified in the Business Practices Manual for Large Load. Computational Load shall also be subject to up-ramp and down-ramp limits established by the Transmission Provider consistent with the process set forth in the Business Practices Manual for Large Load. The proposed subsection states that the Computational Load must have an effective up and down ramp rate not exceeding the specified limit outlined in the Business Practices Manual for Large Load unless otherwise directed.

MISO proposes this Subsection 37A.7 to clearly delineate the ramp requirements for Large Loads. The proposed subsection clearly identifies those parties subject to the requirements (i.e., Computational Load), explains how ramp limits will be measured, and specifies that MISO shall establish up-ramp and down-ramp limits. The proposed subsection also strikes the appropriate balance of providing all parties with sufficient detail of the ramp requirements while leaving implementation details to the Business Practices Manual.

9. Section 37A.8 (Large Load Audit Rights): MISO is proposing a new subsection to implement Large Load audit rights. The proposed subsection provides that the Transmission Provider has the right to audit or verify the information provided by a Transmission Customer for a Large Load and Large Load Equipment. The proposed subsection states that the Transmission Customer shall maintain individual Large Load data and information related to the registration, Load Forecasts, operations, modeling, metering, and/or settlements for five (5) Years, while the Transmission Provider shall maintain individual Large Load data and information it receives related to the registration, Load Forecasts, operations, modeling, metering, and/or settlements for five (5) Years.

MISO proposes this Subsection 37A.8 to clearly identify proposed Large Load audit rights. The subsection affords MISO the Tariff-defined authority to audit and verify information provided

by a Transmission Customer for a Large Load, while ensuring that the information is preserved for at least five years. The proposed subsection strikes a balance of ensuring that information is made available to MISO and preserved for a reasonable time to complete audits, when weighed against any costs and burdens associated with securing such data. The proposed subsection also strikes the appropriate balance of providing all parties with sufficient detail of the audit rights while leaving implementation details to the Business Practices Manual.

V. STAKEHOLDER ENGAGEMENT

MISO has engaged in detailed discussions with stakeholders on Large Load issues since 2024 in various stakeholder entities and workshops. MISO first discussed Large Loads with stakeholders in the context of Expedited Project Review process improvements at the Planning Advisory Committee ("PAC") and Planning Subcommittee ("PSC") in 2024 and 2025. Moreover, since 2024, MISO has discussed coordinating the MISO Transmission Expansion Plan and Definitive Planning Phases ("DPP") processes to accommodate Large Loads at the PSC. MISO additionally discussed Large Load citing methodology at the November 18, 2025, Futures Redesign Workshop.

MISO introduced the Large Load Interconnection Reliability Requirements at the Large Loads Workshop on January 30, 2026.[52] The workshop addressed the challenges associated with reliably interconnecting Large Loads, focusing on defining reliability requirements and improving the speed of integration while maintaining reliability to support member plans and goals. Following the January 30th workshop, MISO discussed the Large Load Interconnection Reliability Requirements at the PAC and the Large Load Working Group ("LLWG"). A table of meetings involving MISO's Large Load reliability requirements development, with links to meeting materials is provided as an attachment to Ms. Li's testimony.

At the February 25, 2026, PAC, MISO proposed a definition of Large Load and provided a high-level overview of the Large Load Interconnection Reliability Requirements. MISO requested stakeholder feedback on the Large Load definition. At the April 20, 2026, LLWG, MISO provided a revised Large Load definition based on stakeholder feedback and presented the Large Load Interconnection Reliability Requirements. MISO requested feedback on the Large Load Interconnection Reliability Requirements. At the April 22, 2026, PAC, MISO shared the revised Large Load definition that had been shared previously at the LLWG. MISO additionally presented transition provisions it developed to address pending but unbuilt Large Load.

At the May 14, 2026, LLWG, MISO responded to stakeholder feedback from the April 20 LLWG meeting, provided proposed Tariff language for the Large Load Interconnection Reliability Requirements, and provided an updated Large Load definition. In response to stakeholder feedback MISO revised the applicability language to provide additional clarity, included transitional provisions that offer flexibility during implementation, and incorporated a phased-in implementation to support readiness across customers and utilities. MISO additionally updated its

[52] *See* Li Testimony, Attachment A – Table of Stakeholder Meetings.

Large Load definition based on stakeholder feedback. Specifically, in response to stakeholder feedback regarding MISO's initial proposal allowing multiple Points of Interconnection ("POI"), MISO proposed only allowing multiple POIs if the ZGIA is located at one of the stations, i.e. Points of Withdrawal of a Large Load Campus. MISO requested feedback on the Large Load Interconnection Reliability Requirements Tariff draft. At the May 27, 2026, PAC, MISO presented the updated Large Load definition, including the revisions to applicability and transitional provisions, to ensure clarity on implementation of Interconnection Reliability Requirements.

At the June 10, 2026, LLWG, MISO responded to stakeholder feedback and presented the Tariff redlines for the Large Load Interconnection Reliability Requirements based on stakeholder feedback. Stakeholder feedback significantly influenced the revised Tariff language, particularly around applicability, transition provisions, and requirement specific language. Namely, MISO: (1) updated Tariff and BPM language to clarify treatment of existing loads, any expansions, and the applicability date; (2) updated the transitional provision to allow more flexibility; (3) updated the Applicability section to distinguish between Computational and Non-Computational Loads, and applied only ramp, PMU, ride-through, and advanced modeling requirements to Computational Loads; (4) updated the Large Load Customer definition to clearly define roles and responsibilities; (5) expanded process detail across several Tariff sections, including applicability screening, pre-MTEP/EPR timing, and transitional provisions for inflight projects; and (6) clarified that Tariff applicability for the ramp, PMU, and ride-through requirements align with NERC's emerging definition of Computational Loads and NERC's Load Modeling Task Force technical discussions. MISO additionally revised the Large Load definition by removing the Large Load Campus construct in response to stakeholder feedback. In addition, MISO published a technical compendium outlining the technical details of the proposal that will establish the basis of the Business Practice Manual ("BPM") for Large Load.

At the June 29, 2026, LLWG, MISO reviewed Tariff redlines for the Large Load definition and Large Load Interconnection Reliability Requirements based on stakeholder feedback. Stakeholder feedback significantly influenced the revised Tariff language, specifically around applicability, transition provisions, and requirement specific language. MISO additionally described how its proposed framework is consistent with the Commission's Show Cause Order and noted that the framework is also in line with the emerging NERC guidance and broader industry practices. Furthermore, MISO described how its interconnection framework relies on the Tariff to set requirements and its BPM to guide consistent implementation, noting that it is targeting Large Load BPM development to take place from June to September 2026. MISO requested stakeholder feedback on the Tariff updates.

MISO separately presented on Large Load Telemetry and PMU Requirements, with the purpose of establishing SCADA telemetry requirements for Large Loads, and PMU requirements for Computational Loads to provide situational awareness and support system reliability across the MISO footprint. Specifically, MISO will require real-time SCADA telemetry from Large Loads via ICCP to support real-time monitoring and analysis, and real-time SCADA telemetry from generation behind same POI as Large Load will also be required for real-time monitoring and optimal market dispatch; generator telemetry shall not be netted with load. Furthermore, MISO

will require PMU or similar device at the Large Load with computational load to support dynamic monitoring in real-time. MISO requested stakeholder feedback on The Large Load Telemetry And PMU Requirements.

MISO also presented on Large Load Operation Forecast Requirements, proposing that Large Loads submit short-term forecasts to reliably manage their variability. In particular, MISO proposed Large Load forecast submission at the CP node level, on hourly and 5-minute cadences aligned with commitment and dispatch and defined forecast error measurement and submission monitoring, noting that it is considering mechanisms to incentivize accurate submissions. MISO highlighted that NERC has called for short-term forecast submissions from Large Loads, that SPP requires them today, and that CAISO has identified the same visibility gap. MISO requested stakeholder feedback on this topic.

At the July 15, 2026, PAC, MISO informed stakeholders that the Steering Committee approved reassignment of the Large Load definition to the LLWG. At the July 16, 2026 LLWG, MISO noted in its liaison report that there is a transition plan to manage active projects, explaining that a key consideration has been ensuring reliability while avoiding disruption to loads at a late stage of development. MISO noted that this consideration is reflected in the Commission's Show Cause Order and that it has received stakeholder feedback indicating that its current proposal does not achieve this directive. Therefore, MISO revised its approach to apply full requirements only to loads that MISO has not yet approved through its planning processes, and to apply visibility requirements to a broader set of Large Loads.

MISO also discussed the Large Load BPM framework and development, focusing on changes for interconnection and operational reliability requirements. MISO proposed a "hub-and-spoke" BPM framework consisting of a new Large Load BPM, the "hub", supported by updates to existing BPMs and manuals, the "spokes." MISO requested stakeholder feedback on the Large Load BPM framework.

At the July 27, 2026, LLWG, MISO reviewed Tariff redlines for the Large Load definition and Large Load Interconnection Reliability Requirements based on stakeholder feedback. MISO noted that its BPM development timeline has been extended to December 2026. MISO also provided updates to its Technical Compendium and requested stakeholder feedback on its Tariff updates.

At the August 12, 2026, LLWG, MISO reviewed the informal stakeholder feedback on the reliability requirement updates provided at the July 27, 2026 LLWG. MISO discussed the additional refinements it made to its proposal based on informal stakeholder feedback. MISO also held an LLWG meeting on August 27, 2026. For this meeting, MISO posted final Tariff language for the IRR Proposal, and discussed two clarifying updates included in the Tariff language related to an explicit statement that Transmission Owners are required to install PMUs, at the Transmission Customer's expense, and clarifications to MISO's Ride-Through requirements.

As described above, throughout the stakeholder engagement period, MSO has solicited feedback from stakeholders and provided written and verbal responses to that feedback. MISO's stakeholder process has contributed to substantive design changes in MISO's filing and the collaborative process with stakeholders resulted in a comprehensive proposal for addressing Large Loads in the MISO footprint. MISO appreciates the willingness of all its stakeholders and state regulators to review and comment on this final proposal, which MISO believes reasonably accommodates concerns raised by stakeholders.

In addition to the stakeholder meetings, MISO's external affairs and Large Load teams have met with individual stakeholders and RERRAs to inform them about MISO's proposal and answer questions. MISO is aware that this is a pressing topic in the MISO footprint and commits to working with stakeholders and RERRAs to address any questions that may arise.

VI. DOCUMENTS SUBMITTED IN THIS FILING

In addition to this Transmittal Letter, this submission includes:

Tab A – Redline Tariff;[53,]

Tab B – Clean Tariff; and

Tab C – Prepared Direct Testimony of Beibei Li.

VII. EFFECTIVE DATE AND REQUEST FOR WAIVER

MISO requests an effective date of December 4, 2026, which is not less than sixty (60) days nor more than one-hundred and twenty (120) days from the date of this filing. As discussed above and in the supporting testimony of Ms. Li, December 4, 2026, is the date after which the MISO Board is expected to approve the MTEP 2026 projects and aligns with the IRR transition provisions described above.

MISO also requests waiver of Section 35.13 of the Commission's regulations, 18 C.F.R. § 35.13 (2026), to the extent applicable to this filing, and requests waiver of any other applicable requirement of 18 C.F.R. Part 35 for which waiver is not specifically requested, if necessary, in order to permit Commission acceptance of this filing.

---

[53] Language currently pending before the Commission in the following, unrelated dockets is highlighted in yellow: Docket No. ER26-2974-000. MISO requests that the Commission treat such highlighted language as subject to the outcome of that pending proceeding. MISO commits to file any revisions to this highlighted language as necessary to comply with any Commission orders in that proceeding.

In addition, MISO has not included language that has future effective dates of 9/1/2027 in Docket No. ER25-1886-000 and 6/1/2029 in Docket No. ER22-1640-003. If needed, MISO commits to file any revisions to comply with any Commission orders in these proceedings and MISO commits to make subsequent filings with the Commission to reflect the most up-to-date version of the then-current Tariff provisions prior to the effective dates of the language.

VIII. COMMUNICATIONS

MISO respectfully requests waiver of Rule 203(b)(3) of the Commission's Rules of Practice and Procedure, 18 C.F.R. § 385.203(b)(3) (2026), to the extent necessary to permit the designation of more than two persons for service on behalf of MISO in this proceeding and requests all communications related to this filing be directed to:

Michael Kessler
Managing Assistant General Counsel
Midcontinent Independent System Operator, Inc.
720 City Center Drive
Carmel, Indiana 46032
Telephone: (317) 753-9434
mkessler@misoenergy.org

James C. Holsclaw
Calfee, Halter & Griswold LLP
3900 Salesforce Tower
111 Monument Circle
Indianapolis, Indiana 46204
Telephone: (317) 308-4266
jholsclaw@calfee.com

IX. NOTICE AND SERVICE

MISO has served a copy of this filing electronically, including attachments, upon all Tariff customers, MISO Members, Member representatives of Transmission Owners and non-Transmission Owners, as well as all state commissions within the MISO Region and the Organization of MISO States. The filing has been posted electronically on MISO's website at https://www.misoenergy.org/legal/ferc-filings/ for other interested parties in this matter.

X. CONCLUSION

For all of the foregoing reasons, MISO respectfully requests that the Commission accept this filing and grant waiver of any Commission regulations the Commission deems in order for the Commission to accept it as proposed.

Respectfully submitted,

/s/ Michael Kessler
Michael Kessler
Managing Assistant General Counsel
Midcontinent Independent System Operator, Inc.
720 City Center Drive
Carmel, Indiana 46032
Telephone: (317) 753-9434
mkessler@misoenergy.org

James C. Holsclaw

Calfee, Halter & Griswold LLP
3900 Salesforce Tower
111 Monument Circle
Indianapolis, Indiana 46204
Telephone: (317) 308-4266
jholsclaw@calfee.com

Attorneys for the Midcontinent Independent System Operator, Inc.

Attachments

Tab A

Calculated Demand Response Resource-Type I Output: The hourly average Actual Energy Injection for each associated Demand Response Resource – Type I for the Hour for the purposes of assessing Excessive/Deficient Energy Deployment Charges.

Calculated Demand Response Resource-Type II Output: (i) For a DRR-Type II Resource that is providing Regulating Service, the Dispatch Interval Actual Energy Injections; or (ii) For a DRR-Type II Resource that is not providing Regulation Service, the average Dispatch Target for Energy for the DRR-Type II Resource, expressed in MW and scaled by Actual Energy Injection.

Calendar Day: Any day of the week, including Saturday, Sunday or a Federal holiday.

Candidate ARR (CARR): ARR nominations submitted by Market Participants to be considered throughout the Annual ARR Allocation process.

Candidate Baseload ARR: Candidate ARR rights equal to each Market Participant's Baseload Usage in an ARR Zone.

Candidate Peak ARR: Candidate ARR rights equal to each Market Participant's Peak Usage in an ARR Zone.

Candidate MTPS ARR: MTPS ARR nominations submitted by the Transmission Provider to be considered during the Annual ARR Allocation process.

Capacity: The instantaneous rate at which Energy can be delivered, received or transferred, including Energy associated with Operating Reserve, Up Ramp Capability, Down Ramp Capability, and Short-Term Reserve, measured in MW.

Capacity Deficiency Charge: A charge that is assessed to an LSE that has provided notification prior to the Planning Resource Auction that it will meet its Initial PRMR in part or in

whole by paying the Capacity Deficiency Charge so that the Transmission Provider does not clear associated Zonal Resource Credits (ZRC) for the associated Initial PRMR through the PRA process.

Capacity Export Limit (CEL): The amount of Planning Resources in MWs for an LRZ or ERZ determined by the Transmission Provider that can be reliably exported from that LRZ or ERZ for each Season.

Capacity Import Limit (CIL): The amount of Planning Resources in MWs for an LRZ determined by the Transmission Provider that can be reliably imported into that LRZ for each Season.

Capacity Replacement Non-Compliance Charge: The charge assessed to a Market Participant for failing to replace ZRCs that were designated for RAR and did not fulfill their performance obligations as set forth in Module E-1.

Capacity Resources: The Generation Resources, Demand Response Resource- Type I, Demand Response Resource-Type II, Dispatchable Intermittent Resources, External Resources, Intermittent Generation, or Electric Storage Resources that are available to meet Demand.

Carved Out GFA(s): Any Grandfathered Agreement(s) that the Commission has identified as "carved out" pursuant to Appendix B of the Commission's September 16, 2004 order, Midwest Independent Transmission System Operator, Inc., 108 FERC ¶ 61,236 (2004) or that meet the criteria in Section 38.8.3(A).b, and set forth in Attachment P to this Tariff, as that Attachment may be amended from time to time.

Cash Collateral Agreement: A Credit Support Document taking the form found in Exhibit III of Attachment L of this Tariff.

Cash Deposit: Cash collateral provided to Transmission Provider to secure Applicant's and/or Tariff Customer's performance under the terms and conditions of Transmission Provider's Tariff, and/or other agreements.

Catastrophic Generator Outage: A forced outage that results in a unit being, or reasonably expected to be unavailable for a minimum of six (6) continuous months, which is not the result of a planned maintenance outage.

Category A Tariff Customer: A Tariff Customer who grants a continuing first-priority security interest to the Transmission Provider in all right, title and interest in any and all accounts receivable and other rights of payment of the Tariff Customer for goods and services provided under, or otherwise arising under, pursuant to or in connection with, the Tariff and/or any of the Agreements.

Category B Tariff Customer: Any Tariff Customer who does not grant a Receivable Security Interest to the Transmission Provider.

Change in Total System Cost: The net change in variable operational costs, which include fuel, variable O&M, variable environmental costs, and other variable costs as mutually agreed upon by the Transmission Provider and the Market Participant, measured in dollars as a result of changing the output of one or more units in response to a redispatch request from the Transmission Provider.

Charge: The withdrawal of energy from the Transmission System by an Electric Storage Resource for the purpose of storing the energy for injection back into the Transmission System at a later time.

Cleared Zonal Resource Credits (Cleared ZRCs): Zonal Resource Credits that have cleared the

Planning Resource Auction, were used in a Fixed Resource Adequacy Plan, were used in a Reliability Based Demand Curve Opt Out, or are currently being used to replace ZRCs.

Coincident Peak Demand: The Demand in MWs, for an LSE and/or EDC, that occurs coincident to the peak Demand for each Season in the Transmission Provider Region, where all Demand has been augmented to include any known reductions in Demand related to LMRs.

Co-located Resources: Two or more Generators located behind the same point of interconnection that participate separately in the Energy and Operating Reserve Markets and share an Interconnection Service Limit.

Combined Reliability Systems: The Reliability Coordination Customer Transmission Facilities and all other transmission facilities for which the Transmission Provider performs Reliability Coordination Services under Part I of Module F.

Commercial Model: A presentation of the relationships between Market Participants and their Resources, Commercial Pricing Nodes and the Network Model in the Energy and Operating Reserve Markets.

Commercial Operation Date: Shall have the meaning set forth in Attachment X of this Tariff.

Commercial Pricing Node (CPNode): An Elemental Pricing Node or an Aggregate Price Node in the Commercial Model used to schedule and settle Market Activities. Commercial Pricing Nodes include Resources, Hubs, Load Zones and/or Interfaces.

Commercially Significant Voltage and Local Reliability Issue: Transmission System voltage or other local reliability concerns that result in Voltage and Local Reliability Commitments. These issues are designated for reasons including, but not limited to, occurrence

frequency, monetary impact, or other criteria as defined in Schedule 44. A Local Balancing Authority or an interested Market Participant may request that the Transmission Provider evaluate a Voltage and Local Reliability Issue for designation as commercially significant.

Commission: The Federal Energy Regulatory Commission, also known as FERC, or its successor.

Commitment Status: A specification submitted by a Market Participant in its Generation Offer, External Asynchronous Resource Offer, Demand Response Resource-Type I Offer, Demand Response Resource-Type II Offer, or Electric Storage Resource Offer for each Hour to indicate whether or how the Transmission Provider is authorized to commit the Resource or deploy the Resource for Operating Reserves for the Hour.

Common Bus: A single Bus to which two or more Resources are connected in an electrically equivalent manner where such Resources are treated as a single Resource for compliance monitoring purposes.

Common Information Model (CIM): The format adopted by the NERC Data Exchange Working Group that will be used by the Congestion Management Customer and the Transmission Provider to exchange Energy Management System models once a year.

Comparable FTRs: FTRs that are identical in all material respects except for the quantity of MW specified.

Competitive Developer Qualification Process: The process utilized to certify Qualified Transmission Developers pursuant to Section VIII.B of Attachment FF of the Tariff.

Competitive Developer Selection Process: The process utilized to solicit Proposals, evaluate

Proposals, and designating a Selected Proposal and Selected Developer(s) pursuant to Section VIII of Attachment FF of the Tariff.

Competitive Substation Facility: A transmission substation facility contained within an Eligible Project that is subject to the Competitive Developer Selection Process in accordance with Section VIII.A of Attachment FF of the Tariff.

Competitive Transmission Executive Committee: A committee consisting of three (3) or more executive staff of the Transmission Provider, including at least one (1) officer, that is charged with overseeing all Transmission Provider staff and consultants involved in evaluating Transmission Developer Applications and Proposals in response to a posted Request for Proposal. The Competitive Transmission Executive Committee will have exclusive and final decision-making authority over: (i) the certification and termination of Qualified Transmission Developers; and (ii) the evaluation and selection of Proposals, resulting in designating Selected Developers. The Competitive Transmission Executive Committee shall possess the specific technical, financial, and regulatory expertise necessary for evaluation of Transmission Developer Applications and Proposals.

Competitive Transmission Facility: A Competitive Substation Facility or Competitive Transmission Line Facility.

Competitive Transmission Line Facility: A transmission line facility contained within an Eligible Project that is subject to the Competitive Developer Selection Process in accordance with Section VIII.A of Attachment FF of the Tariff.

Competitive Transmission Process: The process utilized to certify Qualified Transmission Developers, identify Competitive Transmission Projects, solicit Proposals, evaluate

Proposals, and designating a Selected Proposal and Selected Developer(s) pursuant to Section VIII of Attachment FF of the Tariff. The Competitive Transmission Process includes the Competitive Developer Qualification Process and Competitive Developer Selection Process.

Competitive Transmission Project: The Competitive Transmission Facilities contained within an Eligible Project.

Competitively Sensitive Information: Information that is not public and the unauthorized disclosure of which could have anti-competitive effects, provide a competitor with an unfair or improper competitive advantage, or unfairly or improperly result in competitive harm, detriment, prejudice, disadvantage or injury to the legitimate proprietary rights, business or commercial interests, market position, or ability to bargain freely, of the lawful owners, possessors or users of such information.

Completed Application: An Application that satisfies all of the information and other requirements of the Tariff, including any required deposit.

Composite Credit Score: A composite numerical score scaled from 1.00 to 6.99, representing the sum of the Qualitative and Quantitative score as calculated by the Transmission Provider's credit scoring model in Attachment L of this Tariff.

Computational Load: Large Load comprised of 25 MW or more of Demand from information technology equipment, such as servers, storage, and networking hardware.

Confidential Information: Any proprietary or commercially or competitively sensitive information, trade secret or information regarding a plan, specification, pattern, procedure, design, device, list, concept, policy or compilation relating to the present or

planned business of a Transmission Customer, Market Participant, or other user, which is designated as confidential by the entity supplying the information, whether conveyed orally, electronically, in writing, through inspection, or otherwise, that is received by the Transmission Provider and is not disclosed except under the terms of a Confidential Information policy.

Congestion Management Customer: Any entity taking Interconnected Operations and Congestion Management Service under Part II of Module F.

Congestion Management Process (CMP): The process described in Attachment LL of the Tariff.

Constraint Contribution Factor: Factor that represents the impact that an incremental Actual Energy Injection or Actual Energy Withdrawal of one MW has on a given Active Transmission Constraint.

Constraint Generation Shift Factor Cutoff: A Generation Shift Factor level defined for each transmission constraint that determines the generating units to be included in a Broad Constrained Area, Narrow Constrained Area or Dynamic NCA associated with the constraint. Generation Resources with a Generation Shift Factor whose absolute value is greater than the Constraint Generation Shift Factor Cutoff are included in the Broad Constrained Area, Narrow Constrained Area or Dynamic NCA.

Constraint Management Charge Allocation Factor: A factor that is used to apportion Real-Time Revenue Sufficiency Guarantee Credits in an Hour between (i) the Real-Time Revenue Sufficiency Guarantee Constraint Management Charge and (ii) the Real-Time Revenue Sufficiency Guarantee Day-Ahead Schedule Deviation Charge and the Real-

Time Revenue Sufficiency Guarantee Headroom Charge.

Contingency Reserve: Spinning Reserve and Supplemental Reserve provided by Resources available to the Transmission Provider to use in the event of a system contingency as specified in Schedule 5-Spinning Reserve and Schedule 6– Supplemental Reserve of this Tariff.

Contingency Reserve Deployment Failure Charge: A charge assessed to any Resource that fails to achieve in a Contingency Reserve Deployment Period at least one hundred percent (100%) of the Contingency Reserve Deployment Instruction target.

Contingency Reserve Deployment Instruction: An instruction issued by the Transmission Provider to Resources with cleared Contingency Reserve to deploy a specific MW quantity of cleared Contingency Reserve as communicated via Setpoint Instructions or other electronic means.

Contingency Reserve Deployment Period: The period of time the Resource has to deploy Contingency Reserve following the issuance of a Contingency Reserve Deployment Instruction that is equal to ten minutes.

Contingency Reserve Offer Price Cap: The maximum price permitted for a Spinning Reserve Offer, an On-Line Supplemental Reserve Offer, an Off-Line Supplemental Reserve Offer or a Supplemental Reserve Offer in the Energy and Operating Reserve Markets.

Continuing Error: A continuing software, system or other execution that is inconsistent with the Tariff.

Control: The possession, directly or indirectly, of the power to direct the management or policies of a person or an entity. A voting interest of ten percent (10%) or more shall

create a rebuttable presumption of Control.

Controllable Devices: Devices that may include phase shifters, DC lines, and back-to-back AC/DC converters.

Co-optimized Zonal Contingency Reserve Requirement: The minimum amount of Contingency Reserve the Transmission Provider needs to procure within a Reserve Zone as determined based upon co-optimization with Post Reserve Deployment Constraints.

Co-optimized Zonal Operating Reserve Requirement: The sum of the Co-optimized Zonal Contingency Reserve Requirement and Co-optimized Zonal Regulating Reserve Requirement.

Co-optimized Zonal Regulating Reserve Requirement: The minimum amount of Regulating Reserve the Transmission Provider needs to procure within a Reserve Zone as determined based upon co-optimization with Post Reserve Deployment Constraints.

Co-optimized Zonal Short-Term Reserve Requirement: The minimum amount of Short-Term Reserve the Transmission Provider needs to procure within a Reserve Zone as determined based upon co-optimization with Post Reserve Deployment Constraints.

Co-optimized Zonal Spinning Reserve Requirement: The minimum amount of Spinning Reserve the Transmission Provider needs to procure within a Reserve Zone as determined based upon co-optimization with Post Reserve Deployment Constraints.

Coordinated Flowgate: A Flowgate that is subject to the Transmission Provider's or Coordination Customer's operational control and through which flows are affected by transmission over transmission facilities within its operational control, or with respect to which Transmission Provider serves as a Reliability Authority.

Coordinated Transaction Schedule: An Interchange Schedule to purchase Energy in the Real-Time Energy and Operating Reserve Market from a Source Point in either the MISO Balancing Authority Area or PJM Balancing Authority Area and sell it at a Sink Point in the other balancing authority area that is cleared if the forecasted LMP at the Sink Point minus the forecasted LMP at the Source Point is greater than or equal to the dollar value specified in the bid associated with the Interchange Schedule.

Coordinating Owner: Any entity that is not subject to the jurisdiction of the Commission but participating in the ISO through the execution of a coordination agreement which includes provisions for the elimination of rate pancaking. The terms and provisions of a Coordinating Owner's coordination agreement shall supersede the similar terms and provisions of this Tariff where applicable.

Coordination Customer: Any customer taking Coordination Services from the Transmission Provider pursuant to Module F of the Tariff. The term Coordination Customer includes: Reliability Coordination Customer, and Congestion Management Customer.

Coordination Services: The services provided by the Transmission Provider pursuant to Module F of the Tariff. Coordination Services include Reliability Coordination Service and Interconnected Operations and Congestion Management Service.

Corporate Guaranty: A legal document taking the form found in Exhibit I of Attachment L of this Tariff used by an Affiliate of an Applicant and/or Tariff Customer that guarantees the obligations of such Applicant or Tariff Customer.

Cost Allocation Zone: The zones identified in Attachment WW of this Tariff used for allocating the costs of Market Efficiency Projects.

Cost of Congestion: The Marginal Congestion Component of LMP at the sink minus the Marginal Congestion Component of LMP at the source.

Cost of Losses: Marginal Losses Component of LMP at the sink minus the Marginal Losses Component of LMP at the source.

Cost of New Entry (CONE): The capital, operating, financial and other costs of acquiring a new Generation Resource within the Transmission Provider Region for any designated LRZ.

Council of the City of New Orleans (CNO): The governmental body with the power of supervision, regulation, and control over public utilities providing service within the City of New Orleans, *i.e.*, Entergy New Orleans, pursuant to the Constitution of the State of Louisiana and the Home Rule Charter of the City of New Orleans. CNO shall have all the rights and responsibilities granted herein to states, state public utility commissions, state agencies, and State Regulatory Authorities.

Counterflow ARR: ARR allocated during the LTTR Restoration and Termination Stage of an Annual ARR Allocation based on a Counterflow ARR Entitlement.

Counterflow ARR Entitlement: Any Stage 1A eligible ARR Entitlement's portion that was not nominated in Stage 1A of a Market Participant's year 1 Annual ARR Allocation but that the Transmission Provider deems to provide counterflow necessary to enable curtailed Stage 1A CARRs to be restored (fully or partly) during the LTTR Restoration and Termination Stage of an Annual ARR Allocation.

Credit and Security Agreement: A Credit Support Document taking the form found in Exhibit V of Attachment L of this Tariff.

Credit Policy: The Transmission Provider's creditworthiness requirements and credit evaluation

procedures as contained in Attachment L of this Tariff.

Credit Support Documents: Any agreement or instrument in any way guaranteeing or securing any or all of a Tariff Customer's obligations under this Tariff (including, without limitation, the Credit Policy), any agreement entered into under, pursuant to, or in connection with this Tariff or any agreement entered into under, pursuant to, or in connection with this Tariff or the Credit Policy, and/or any other agreement to which the Transmission Provider and the Tariff Customer are parties, including, without limitation, any Corporate Guaranty, Cash Collateral Agreement, Letter of Credit, Credit and Security Agreement or agreement granting a security interest.

Critical Energy Infrastructure Information (CEII): Confidential information described in 18 C.F.R § 388.113(c)(1), as may be amended from time to time.

Curtailment: A reduction in firm or non-firm Transmission Service in response to a transfer capability shortage as a result of system reliability conditions pursuant to Section 14.7 or Section 27A of this Tariff.

Customer Load Aggregation: A Load Zone approved by the Transmission Provider for the purposes of submitting Bids to or scheduling into the Energy and Operating Reserve Markets and for settlement of Market Activities.

Cyber Exigency: A suspicious electronic act or event that has the potential to compromise reliability within the Transmission Provider Region or other electrical facilities directly or indirectly connected to the Transmission System and whose severity reasonably requires that the Transmission Provider obtain expert assistance not normally called upon to counter such an electronic act or to resolve such an event.

Large Load: Load with Demand of 50 MW or more associated with any facility or aggregation of facilities located at a single substation behind one or more Point(s) of Withdrawal from the Transmission System that is owned, operated, or controlled by: (a) a single entity, or (b) a group of entities that will coordinate with respect to the profile of the Load. Large Load does not include Load used exclusively for charging an Electric Storage Resource.

Large Load Equipment: Any of the facilities, devices, or equipment that constitutes a part of a Large Load, or are used to interconnect the Large Load to the Transmission System.

Legitimate Risks: Business operation risks, incurred by a Market Participant, that increase as a result of providing any of the products described in the Tariff. These risks include, but are not limited to, the risk of repair expenses; business interruption due to outages resulting from either a failure to start, or unplanned outages that occur when the facility is in service; regulatory restrictions; and disruptions from labor relations problems. These risks are in the nature of marginal costs included in Reference Levels. In contrast, the risk associated with fuel purchase price is not a component of Reference Levels, but rather a basis for the Fuel Cost Uncertainty Adder and some of the conduct thresholds under Module D.

Letter of Credit: A Credit Support Document taking the form found in Exhibit II of Attachment L to this Tariff.

Line Outage Distribution Factor (LODF): The percent of flow on line A, which is transferred to line B for the loss of line A.

Load: A term that refers to either an end-user of Energy, net of system losses, or the amount of Energy (MWh) consumed by such end-user within the Transmission Provider Region.

Load Forecast: An estimate of the amount of Energy (MWh) or Capacity (MW) to be consumed within the Transmission Provider's Region, prepared by the Transmission Provider based upon input from Local Balancing Authorities and Load Serving Entities, and used in the Transmission Provider's scheduling and dispatch decisions to ensure reliable operation of the MISO Balancing Authority.

Load Modifying Resource: A Demand Resource or Behind the Meter Generation Resource.

Load Modifying Resource Market Participant (LMR MP): A Market Participant that has the rights to control the energy demand or the energy production from a Load Modifying Resource.

Load Ratio Share: Ratio of a Transmission Customer's Network Load in a Zone to the total Load in that pricing Zone computed in accordance with Module B, Section 34.2 of this Tariff.

Load Serving Entity (LSE): Any entity that has undertaken an obligation to serve Load for end-use customers by statute, franchise, regulatory requirement or contract for Load located within or attached to the Transmission System, including but not limited to purchase-selling entities and retail power marketers with the obligation to serve Load. Where a distribution cooperative or a municipal distribution system otherwise covered by the prior sentence is a wholesale customer of a generation and transmission cooperative or a municipal Joint Action Agency, the generation and transmission cooperative, a state or federal agency or municipal Joint Action Agency may act as the Load Serving Entity for such distribution cooperative or municipal distribution system. Where retail Load switching occurs in a state, the entity with the obligation to serve Load is the LSE

Load Shedding: The systematic reduction of system demand by temporarily decreasing Load in response to a Transmission System Emergency, Local Transmission Emergency, or MISO Balancing Authority Area or Sub-Area Capacity shortages, system instability, or voltage control considerations under Module B and Module C, of this Tariff.

Load Zone: A Zone determined by Market Participants representing an aggregate area of consumption for a single Load Serving Entity within the MISO Balancing Authority Area and used for the purposes of scheduling, reporting Actual Energy Withdrawal volumes, and settling Energy transactions at aggregated Load levels, approved and maintained by the Transmission Provider to facilitate transactions.

Local Balancing Authority (LBA): An operational entity or a Joint Registration Organization which is (i) responsible for compliance to NERC for the subset of NERC Balancing Authority Reliability Standards defined in the Balancing Authority Agreement for their local area within the MISO Balancing Authority Area, (ii) a Party to Balancing Authority Agreement, excluding MISO, and (iii) shown in Appendix A to the Balancing Authority Agreement.

Local Balancing Authority Area: Shall have the meaning set forth in the Balancing Authority Agreement.

Local Clearing Requirement (LCR): The minimum amount of Seasonal Accredited Capacity for an LRZ that is required to meet its LOLE for each Season while fully using the Zonal Import Ability for such LRZ and accounting for controllable exports.

Local Clearing Requirement Charge: A charge that is assessed to Load Serving Entities whenever an LRZ's Auction Clearing Price for a Season is increased due to its LCR

being greater than the sum of individual Final PRMR of the LSEs.

Local Reliability Requirement (LRR): The minimum amount of Unforced Capacity for an LRZ to meet its LOLE for each Season, without considering transmission ties to systems outside of the LRZ.

Local Resource Zone (LRZ): A geographic area within the Transmission Provider Region that is prescribed by the Transmission Provider, based upon the criteria in Section 68A.3, to address congestion that limits Planning Resource deliverability.

Local Resource Zone Peak Demand: The Demand in MWs, for an LSE and/or EDC, in a Local Resource Zone that occurs coincident to the peak Demand for each Season in the Local Resource Zone, where all Demand has been augmented to include any known reductions in Demand related to LMRs.

Local Short-Term Reserve: Short-Term Reserve available to the Transmission Provider to address transmission constraints in any Reserve Zone(s).

Local Short-Term Reserve Requirements: The amount of Local Short-Term Reserve, as determined pursuant to Module C of the Tariff, that the Transmission Provider is required to procure in a Reserve Zone.

Local Transmission Emergency: Transmission System conditions or events that have the potential to exceed or have exceeded operating limits that do not pose a risk of cascading to the interconnection but require emergency-level actions.

Locational Marginal Price (LMP): A price for Energy at a given Commercial Pricing Node in the Transmission Provider Region which is the marginal cost of serving demand at the Commercial Pricing Node while meeting Zonal and Market-Wide Operating Reserve

Requirements, Up Ramp Capability requirements, Down Ramp Capability requirements, and Short-Term Reserve Requirements. Such price may be either Ex Ante or Ex Post.

Long-Term Firm Point-To-Point Transmission Service: Firm Point To Point Transmission Service under Module B of this Tariff with a term of one (1) year or more.

Long Term Transmission Rights (LTTR): ARRs allocated in Stage 1A of the Annual ARR Allocation process. LTTRs carry annual rollover rights lasting ten (10) years or more.

Look Ahead Commitment (LAC): A process performed during the Real-Time Energy and Operating Reserve Market that develops Resource commitment and decommitment options that may be used by the Transmission Provider to ensure sufficient Resources will be available to meet Load Forecast, Operating Reserve, Up Ramp Capability, Down Ramp Capability, Short-Term Reserve and other demand requirements for the near term intra-hour intervals.

Loss of Load Expectation (LOLE): An estimate of the average number of days with supply interruption to end use customers, whether for a single hour or multiple hours in a day.

Loss of Load Probability Curve: The probability of shedding firm Load under varying levels of Contingency Reserve shortages, to be used in accordance with Schedule 28. This curve is further described in the Transmission Provider's Business Practices Manual for the Energy and Operating Reserves Markets (BPM-002).

Loss Pools: A single Local Balancing Authority Area or an aggregation of Local Balancing Authority Areas, including those Local Balancing Authority Areas operated by Coordinating Owners consistent with the terms and provisions of the Coordinating Owners agreement, designated by the Transmission Provider for the purposes of

calculating and distributing Day Ahead and Real Time Hourly Marginal Losses Revenue Surplus.

Lost Opportunity Cost: The LMP revenues that were not realized relative to a theoretical future operating point.

Partial-Year FTR Allocation: The procedure used by the Transmission Provider to allocate FTRs to Market Participants in the new ARR Zones added as a result of Transmission Provider Region expansion that becomes effective after the start of the Annual ARR Allocation period. The Partial-Year FTR Allocation will cover the partial year period when the new ARR Zone(s) become effective to the start of the next Annual ARR Allocation. For the partial year period, the Market Participants in the new ARR Zone(s) may request an allocation of FTRs, which will be in lieu of an allocation of ARRs.

Party(ies): The Transmission Provider, ITC where appropriate, Market Participants, Transmission Customers, or any combination of the above.

Past Due Amount: Any amount invoiced by the Transmission Provider that is not paid when due.

Peak Reserved Source Set: Set of Resources including those constituting the Baseload Reserved Source Point that have met the Resource Qualification Requirements for inclusion as a Reserved Source Point for a given ARR Zone.

Peak Usage: A Market Participant's Total Forecasted Peak Load in a given ARR Zone for the upcoming Annual ARR Allocation period calculated using the immediate prior three year actual peak Loads. The Total Forecast Peak Load is the sum of the forecast Network Integration Transmission Service peak Load for the upcoming allocation period plus peak Load served by Option A – Grandfathered Agreements plus peak Load served by Option B – Grandfathered Agreements.

Penalty Level: A component of a mitigation measure described in Module D that represents the amount of Energy purchased by a Market Participant that is an LSE or represents an LSE

in the Real Time Energy Market in excess of the Allowance Level the entity is subject to.

Physical Withholding Threshold Quantity: Threshold employed by the IMM to identify physical withholding by a supplier of Planning Resources for the Planning Resource Auction, expressed in MW.

Plan: The Transmission Provider's Market Monitoring Plan set forth in Module D of this Tariff.

Planned Transmission Outage: Any transmission outage scheduled for the performance of maintenance or repairs or the implementation of a system enhancement which is planned in advance for pre-determined duration and which meets the notification requirements for such outages as specified by the Transmission Provider.

Planning Advisory Committee: A committee of stakeholders established under the ISO Agreement for the purpose of providing input to the planning staff on the development of the MTEP.

Planning Area(s): A collective or alternative reference to the First Planning Area and/or the Second Planning Area.

Planning Coordinator: The entity responsible for the longer term reliability of its planning coordinator area.

Planning Reserve Margin (PRM): The percentage above forecasted Coincident Peak Demand of Planning Resources for the Transmission Provider Region in order to meet the LOLE. This percentage will include a quantity sufficient to cover transmission losses.

Planning Reserve Margin Requirement (PRMR): The amount of ZRCs required of each LSE with Coincident Peak Demand in an LRZ to meet the LSE's Resource Adequacy Requirements in each Season.

Planning Resource: A Capacity Resource or Load Modifying Resource that can be used to satisfy PRMR.

Planning Resource Auction (PRA): Auctions conducted by the Transmission Provider to determine the ACP and the cleared ZRC Offers for each LRZ and ERZ for each Season in the applicable Planning Year.

Planning Year: The period of time from June 1st of one year to May 31st of the following year that is used for developing Resource Plans. The first Planning Year shall commence on June 1, 2009.

PMAX: The maximum Generator real power output reported in MWs on a seasonal basis.

PMIN: The minimum Generator real power output reported in MWs on a seasonal basis.

Point(s) of Delivery: Point(s) on the Transmission System where Capacity and Energy transmitted by the Transmission Provider will be made available to the Receiving Party under Module B and Module C of this Tariff. The Point(s) of Delivery shall be specified in the Service Agreement for Long Term Firm Point To Point Transmission Service or the HVDC Service Agreement.

Point(s) of Receipt: Point(s) of interconnection on the Transmission System where Capacity and Energy will be made available to the Transmission Provider by the Delivering Party under Module B and Module C of this Tariff. The Point(s) of Receipt shall be specified in the Service Agreement for Long Term Firm Point To Point Transmission Service or the HVDC Service Agreement.

Point(s) of Withdrawal: The point(s) where a non-transmission facility that is used to withdraw Energy from the Transmission System to serve Load connects to the Transmission

System.

Point-To-Point Transmission Service: The reservation of Capacity and of Energy on either a firm or non firm basis from the Point(s) of Receipt to the Point(s) of Delivery under Module B of this Tariff.

Portfolio: For Multi-Value Project purposes, means two or more Multi-Value Projects proposed to be located in one or more Transmission Pricing Zones that, when evaluated together, are expected to result in system-wide benefits across the MISO footprint or benefits across the subregion. For purposes of the Portfolio, subregion refers to either the MISO Midwest MVP Cost Allocation Subregion or MISO South MVP Cost Allocation Subregion.

Post Reserve Deployment Constraints: The post zonal Operating Reserve and Short-Term Reserve deployment flows on the transmission constraints and Sub-Regional Power Balance Constraints, used to determine the Co-optimized Zonal Regulating Reserve Requirement, Co-optimized Zonal Contingency Reserve Requirement, Co-optimized Zonal Spinning Reserve Requirement, and Co-optimized Zonal Short-Term Reserve Requirement, for each Reserve Zone.

Post Reserve Deployment Constraints Demand Curve: Demand curves used to price Post Reserve Deployment Constraints.

Power Purchaser: The entity that is purchasing the Capacity and reserved Energy to be transmitted under this Tariff.

PPA Schedule: Schedule associated with a PPA that is executed after April 3, 2014.

Pre-Confirmed Application: An Application that commits the Eligible Customer to execute a Service Agreement upon receipt of notification that the Transmission Provider can

provide the requested Transmission Service.

Price Sensitive Demand Bids: Demand Bids in which the Market Participant specifies a maximum price (dollars per MWh) at which the Market Participant desires to purchase the designated MWh of Energy.

Price Taker: A Market Participant with an Energy and/or Operating Reserve Offer not capable of setting LMPs or MCPs.

Production Costs: The Energy output cost of a Generation Resource or a Demand Response Resource-Type II based upon Start Up, No Load and Energy Offer cost components set forth in an Offer or the Energy reduction cost of a Demand Response Resource-Type I based upon Shut Down Offer, Hourly Curtailment Offer and Energy Offer cost components set forth in an Offer.

Project Cost: All costs for Network Upgrades, as determined by the Transmission Provider to be a single transmission expansion project, including those costs associated with seeking and obtaining all necessary approvals for the design, engineering, construction, and testing of the Network Upgrades. These Network Upgrades will include costs classified by the Transmission Owners and Independent Transmission Companies as transmission plant using the Uniform System of Accounts 350 through 359 or equivalent set of accounts for any Coordinating Owner.

Project Financial Security: The Cash Deposit or Irrevocable Letter of Credit described in Appendix 1 to Attachment FF of the Tariff that a Selected Developer is required to provide.

Proposal: A proposal to construct, implement, own, operate, maintain, repair, and restore all

Competitive Transmission Facilities associated with a Competitive Transmission Project, in response to a Request for Proposal. Proposals may be submitted in one of two different forms: (i) a Single-Developer Proposal; or (ii) a Joint-Developer Proposal. The term "Proposal" shall include "Single-Developer Proposal" and "Joint-Developer Proposal".

Proposal Cure Period: A period of time, as set forth within Attachment FF, Section VIII.D.10, allowed for an RFP Respondent to correct deficiencies identified by the Transmission Provider in its previously submitted Proposal. The Proposal Cure Period commences upon notification by the Transmission Provider to an RFP Respondent of deficiencies in its Proposal.

Proposal Participant(s): Any entity or entities involved in a Proposal, excluding the RFP Respondent(s), that will co-own the Competitive Transmission Project and rely on the RFP Respondent(s) to be the Selected Developer(s) responsible for constructing and implementing the Competitive Transmission Facilities associated with the Competitive Transmission Project. Proposal Participants may be identified in a Proposal as responsible for one or more aspects of operations, maintenance, repair, or restoration, on terms comparable to those that would apply if the RFP Respondent(s) intended to rely on a third-party contractor.

Proposal Submission Deadline: The date and time Proposals must be submitted to the Transmission Provider by in order to be considered and evaluated by the Transmission Provider. The Submission Deadline shall be no later than 5:00 PM EPT on the date specified in the RFP, which shall not exceed one hundred and sixty-five (165) Calendar Days from the date the RFP was issued by the Transmission Provider, unless such date falls on a Saturday, Sunday, or MISO observed holiday in which case the Proposal Submission Deadline shall be

the next Business Day that is not a MISO observed holiday.

Proposed Generator Planned Outage: The planned removal from service, in whole or in part, of a Generation Resource for inspection, maintenance or repair for which the Generation Owner has sought or will seek approval from the Transmission Provider for such planned removal in accordance with the Business Practices Manuals.

Protected Information: Privileged and non public information to be maintained by the Transmission Provider.

Proxy Offers: The Offers created for resources that are deployed during Emergency operating procedures by the Transmission Provider as specified in Schedule 29A.

Pseudo-tie: A telemetered reading or value that is updated in real time and used as a tie line flow in the Area Control Error equation but for which no physical tie or energy metering actually exists. The integrated value is used as a metered MWh value for interchange accounting purposes. Pseudo tied status of Resources and Loads may only be changed during Network Model updates and the timing of such updates shall be as defined in the Business Practices Manuals.

Pseudo-tie Agreement: The Agreement between MISO and a Market Participant included as Attachment FFF-1 or Attachment FFF-2 to this Tariff, as applicable, outlining the terms and conditions of the real-time transfer of control of a generating unit or load to (or from) the MISO Balancing Authority Area from (or to) a specified external Balancing Authority Area.

Public Power: For credit scoring purposes, an Applicant or Market Participant that is a not for profit municipality, cooperative, Joint Action Agency, or agent representing one or more Public Power entities and whose credit quality is directly derived from the credit quality

of the Public Power entities represented through the agency relationship.

Public Power Composite Score: For credit scoring purposes, the weighted average value of the Public Power Qualitative Score and the Public Power Quantitative Score. The relative weights are sixty percent (60%) and forty percent (40%).

Public Power Qualitative Score: A component of a Public Power Composite Score which has, for credit scoring purposes, a value ranging from 1 to 6.99, with 1 being the best and 6.99 being the worst. The value is based on a review by the Transmission Provider of qualitative factors relative to an Applicant's business, including but not limited to: i) regulatory; ii) legal; iii) demographic; and iv) energy supply/price factors as provided in Attachment L to this Tariff.

Public Power Quantitative Score: A component of a Public Power Composite Score which has, for credit scoring purposes, a value ranging from 1 to 6.99, with 1 being the best and 6.99 being the worst. The value is based on a review by the Transmission Provider of various financial metrics as detailed in the Transmission Provider's credit scoring model in Attachment L.

I. Applicability of Large Load Reliability Requirements

The Transmission Customer taking Transmission Service on behalf of a Large Load shall be responsible for complying with each of the requirements of this Section 37A applicable to each Large Load it represents.

Except as set forth in Section 37A.II, all Large Load shall be subject to the Basic Facility Data, Modeling, Telemetry, Forecast Data, and Audit requirements set forth in Sections 37A.1 through 37A.4 and section 37A.8 of the Tariff.

Except as set forth in Section 37A.II, Computational Load, shall be subject to the Phasor Measurement Unit, Ride-Through and Ramp requirements set forth in Sections 37A.5 through 37A.7 of the Tariff. The Transmission Provider shall determine whether Computational Load is associated with a Large Load based on information provided by the Transmission Customer to the Transmission Provider for such purpose, as set forth in the Business Practices Manual for Large Load.

A Transmission Customer taking Transmission Service on behalf of a Large Load shall demonstrate its ability to effectuate compliance with each of the requirements of this Section 37A. The Transmission Customer shall provide the Transmission Provider with documentation necessary for the Transmission Provider to verify compliance with the requirements of this Section 37A. Such documentation may include applicable agreement(s), if any, between the Transmission Customer and the entity or entities that own, operate or use the Large Load, or an attestation signed by an authorized officer of the Transmission Customer demonstrating that the Transmission Customer will be provided access to all information reasonably required to enable the Transmission Customer to comply with and for the requirements of this Section 37A,

including compliance with the terms of any operating protocols adopted by the Transmission Provider, Transmission Owner and/or the Transmission Customer for a specific Large Load.

Failure to comply with the requirements established in this Section 37A may result in a delayed Service Commencement Date, a period of time needed for corrective action, operational limitations, or other remediation action(s) by Transmission Provider as may be necessary to maintain Transmission System reliability. The process by which Transmission Provider will determine whether any such measures are appropriate, which may include the period of time during which corrective action must be undertaken, shall be as set forth in the Business Practices Manual for Large Load.

II. Transition Provisions

1) For purposes of these transition provisions, Load associated with a transmission project shall be defined as meeting the "MTEP/EPR Condition" if the project has either: (a) been approved by the Transmission Provider Board in MTEP 2026, or a prior MTEP; or, (b) been submitted to the Transmission Provider for Expedited Project Review (EPR) on or prior to June 18, 2026, in accordance with Attachment FF of the Tariff.

2) A Transmission Customer taking Transmission Service on behalf of a Large Load shall ensure that all Large Load shall be subject to all the requirements as set forth in this Section 37A, provided that:

(a) Fully Exempt Large Load:

A Large Load that has a Service Commencement Date on or prior to December 4, 2026, shall be exempt from all requirements set forth in this Section 37A with respect to the portion of the Large Load that has

procured Transmission Service as of the Service Commencement Date. Any modification or series of modifications to a Load that meets the MTEP/EPR Condition, which results in a cumulative increase of 25 MW or more in Transmission Service for such Load and with a Service Commencement Date after December 4, 2026, shall be subject to subsection (2)(b) below.

(b) Partially Exempt Large Load:

(i) A Large Load, or a portion of a Large Load, that does not have a Service Commencement Date prior to December 4, 2026, but that meets the MTEP/EPR Condition as defined herein shall be subject to the requirements set forth in Sections 37A.1 through 37A.5 and Section 37A.8, and shall be exempt from the requirements set forth in Sections 37A.6 through 37A.7.

(ii) A Large Load, or a portion of Large Load, that does not have a Service Commencement Date prior to December 4, 2026, and that has not met the MTEP/EPR Condition but has submitted Load associated with a transmission project to the Transmission Provider for EPR on or after June 19, 2026, but on or before October 31, 2026, shall be subject to all requirements set forth in this Section 37A, provided that Transmission Provider may waive the requirements set forth in Section 37A.6 based upon a determination that: a) exemption from such requirements would not have an adverse reliability impact; and, b) compliance with such requirements would result in significant costs. The Business Practices

Manual for Large Load shall set forth the process and documentation necessary for Transmission Provider to determine whether such criteria have been met.

(c) Non-Exempt Large Load:

A Large Load, or a portion of a Large Load, that does not meet the MTEP/EPR Condition shall be subject to all applicable requirements set forth in this Section 37A.

3) Notwithstanding any of the provisions above the Transmission Provider has the right to require compliance with any or all requirements of this Section 37A if the Transmission Provider determines that operation of a Large Load results in a material adverse effect on Transmission System reliability. The process by which Transmission Provider will make such a determination and which, if any, of the requirements of this Section 37A are to be applied shall be as set forth in the Business Practices Manual for Large Load.

Large Load Information and Basic Facility Data Requirements

A Transmission Customer taking Transmission Service on behalf of a Large Load shall be responsible for providing the Transmission Provider with basic information, one-line diagrams, and a description of the electrical characteristics of the Large Load for all Large Load Equipment, in the format and consistent with the timelines specified in the Business Practice Manual for Large Load. Any changes to the characteristics of a Large Load and/or Large Load Equipment, including any changes to the modeling details for the Large Load, shall be provided to the Transmission Provider in a timely manner, consistent with the Business Practices Manual for Large Load. Such changes may include, but are not limited to, Load MW amounts, firm and non-firm MW amounts, any dispatchable Load MWs, power factor, metering, telemetry, breaker configuration, staged Load additions and annual energy as further set forth in the Business Practices Manual for Large Load.

A Transmission Customer taking Transmission Service on behalf of a Large Load must coordinate with the Transmission Owner where the Large Load Point(s) of Withdrawal is located pursuant to the Transmission Provider's load interconnection guidance and applicable NERC standards.

Large Load Modeling Requirements

A Transmission Customer taking Transmission Service on behalf of a Large Load shall provide the Transmission Provider with verified and complete electrical models of the Large Load, as well as detailed Load profiles, for modeled Loads, in the format and consistent with the timelines specified in the Business Practice Manual for Transmission Planning. Such model information must include sufficient detail for the Transmission Provider to evaluate system performance under contingency conditions in accordance with currently active versions of Transmission System Planning Performance Standards.

Following completion of applicable studies and prior to the Service Commencement Date of the Large Load, the Transmission Customer shall submit final verified models to the Transmission Provider in accordance with the Business Practices Manual for Large Load. The Transmission Customer shall provide notice to the Transmission Provider of any material modifications to the Large Load and shall not implement any such proposed modifications until studied and approved by the Transmission Provider in accordance with the Business Practices Manual for Large Load.

The final models of a Large Load shall reflect the as-built configuration and actual operating characteristics of the Large Load and Large Load Equipment. The Transmission Customer shall maintain and update models as required by the Transmission Provider.

Large Load Telemetry Requirements

Prior to the later of the Service Commencement Date of a Large Load or September 1, 2027, a Transmission Customer taking Transmission Service on behalf of a Large Load must provide real-time telemetry for the Large Load, either directly, through the applicable Transmission Owner, or other Transmission Provider-approved communication path, in the form and manner as set forth in the Business Practices Manual for Large Load.

Individual metering will be required for all Large Load and any Generation Resource(s) serving such Large Load that is located behind the same Point(s) of Withdrawal to the Transmission System as the Large Load and meeting thresholds outlined in the Business Practices Manual for Large Load. All telemetry shall be provided via Inter-Control Center Communications Protocol (ICCP) and must meet Transmission Provider update requirements as specified in the Business Practices Manual for Large Load. The Transmission Customer must use commercially reasonable efforts to maintain telemetry availability and accuracy for the Large Load and must promptly correct erroneous data, bad mappings, and ICCP modeling issues.

Large Load Forecast Data Requirements

Prior to the later of the Service Commencement Date of a Large Load or September 1, 2027, a Transmission Customer taking Transmission Service on behalf of a Large Load must provide day(s) ahead and real-time Load Forecasts for a Large Load directly to the Transmission Provider to support the Reliability Assessment Commitment (RAC) and Security Constrained Economic Dispatch (SCED) processes, along with other reliability studies. The Load Forecasts shall be updated to reflect the most current information on the expected Demand, in accordance with the Business Practices Manual for Large Load.

Large Load Phasor Measurement Unit Requirements

The Transmission Customer taking Transmission Service on behalf of a Computational Load shall be subject to the Phasor Measurement Unit (PMU) requirements set forth in this Section 37A.5. Prior to the later of the Service Commencement Date of a Large Load or September 1, 2027, phasor measurement recording and communications equipment must be installed by the Transmission Owner, at the Transmission Customer's expense, that is capable, at a minimum, of gathering phasor measurements as specified in Business Practices Manual for Large Load. The phasor measurement equipment must be installed at the Transmission Owner's side of the Point(s) of Withdrawal and become part of the Transmission Owner interconnection facilities. To the extent similar quality equipment is being added or already exists, such as relays or digital fault recorders, that can collect data at least at the same rate as PMU and which data is synchronized via a high-accuracy satellite clock, such equipment may be utilized to satisfy this requirement if the equipment is located on the Transmission Owner's side of the Point(s) of Withdrawal. Phasor measurements must be streamed in the format specified in the Business Practices Manual for Large Load and be provided to the Transmission Provider by the Transmission Owner.

Large Load Ride-Through Requirements

A Transmission Customer taking Transmission Service on behalf of a Computational Load shall be responsible for ensuring that the Computational Load remains connected to the Transmission System and continue operation during voltage and frequency disturbances within the performance criteria established by the Transmission Provider in the Business Practices Manual for Large Load.

Ride-through requirements apply at the Point(s) of Withdrawal and may include evaluation, testing, modeling, monitoring, and other compliance measures established by the Transmission Provider in the Business Practices Manual for Large Load.

Large Load Ramp Requirements

A Transmission Customer taking Transmission Service on behalf of a Computational Load shall be subject to the ramp requirements set forth in this Section 37A.7. Ramp limits shall be measured in aggregate across the applicable Point(s) of Withdrawal during stable-state transition, including any reduction/ramp smoothing provided by generation or other resources that meets the eligibility requirements specified in the Business Practices Manual for Large Load. Computational Load shall be subject to up-ramp and down-ramp limits established by the Transmission Provider consistent with the process set forth in the Business Practices Manual for Large Load. The Computational Load must have an effective up and down ramp rate not exceeding the specified limit outlined in the Business Practices Manual for Large Load unless otherwise directed by the Balancing Authority, Reliability Coordinator, or Transmission Operator.

Large Load Audit Rights

The Transmission Provider has the right to audit or verify the information provided by a Transmission Customer taking Transmission Service on behalf of a Large Load including, but not limited to, information related to the registration, claimed capacity, operations, modeling, inverter settings, metering, settlements, Large Load Equipment, and/or any other information related to the participation of the Large Load under this Tariff. The Transmission Customer shall maintain individual Large Load data and information related to the registration, Load Forecasts, operations, modeling, metering, and/or settlements for five (5) Years. The Transmission Provider shall maintain individual Large Load data and information it receives related to the registration, Load Forecasts, operations, modeling, metering, and/or settlements for five (5) Years.

Tab B

Calculated Demand Response Resource-Type I Output: The hourly average Actual Energy Injection for each associated Demand Response Resource – Type I for the Hour for the purposes of assessing Excessive/Deficient Energy Deployment Charges.

Calculated Demand Response Resource-Type II Output: (i) For a DRR-Type II Resource that is providing Regulating Service, the Dispatch Interval Actual Energy Injections; or (ii) For a DRR-Type II Resource that is not providing Regulation Service, the average Dispatch Target for Energy for the DRR-Type II Resource, expressed in MW and scaled by Actual Energy Injection.

Calendar Day: Any day of the week, including Saturday, Sunday or a Federal holiday.

Candidate ARR (CARR): ARR nominations submitted by Market Participants to be considered throughout the Annual ARR Allocation process.

Candidate Baseload ARR: Candidate ARR rights equal to each Market Participant's Baseload Usage in an ARR Zone.

Candidate Peak ARR: Candidate ARR rights equal to each Market Participant's Peak Usage in an ARR Zone.

Candidate MTPS ARR: MTPS ARR nominations submitted by the Transmission Provider to be considered during the Annual ARR Allocation process.

Capacity: The instantaneous rate at which Energy can be delivered, received or transferred, including Energy associated with Operating Reserve, Up Ramp Capability, Down Ramp Capability, and Short-Term Reserve, measured in MW.

Capacity Deficiency Charge: A charge that is assessed to an LSE that has provided notification prior to the Planning Resource Auction that it will meet its Initial PRMR in part or in

whole by paying the Capacity Deficiency Charge so that the Transmission Provider does not clear associated Zonal Resource Credits (ZRC) for the associated Initial PRMR through the PRA process.

Capacity Export Limit (CEL): The amount of Planning Resources in MWs for an LRZ or ERZ determined by the Transmission Provider that can be reliably exported from that LRZ or ERZ for each Season.

Capacity Import Limit (CIL): The amount of Planning Resources in MWs for an LRZ determined by the Transmission Provider that can be reliably imported into that LRZ for each Season.

Capacity Replacement Non-Compliance Charge: The charge assessed to a Market Participant for failing to replace ZRCs that were designated for RAR and did not fulfill their performance obligations as set forth in Module E-1.

Capacity Resources: The Generation Resources, Demand Response Resource- Type I, Demand Response Resource-Type II, Dispatchable Intermittent Resources, External Resources, Intermittent Generation, or Electric Storage Resources that are available to meet Demand.

Carved Out GFA(s): Any Grandfathered Agreement(s) that the Commission has identified as "carved out" pursuant to Appendix B of the Commission's September 16, 2004 order, Midwest Independent Transmission System Operator, Inc., 108 FERC ¶ 61,236 (2004) or that meet the criteria in Section 38.8.3(A).b, and set forth in Attachment P to this Tariff, as that Attachment may be amended from time to time.

Cash Collateral Agreement: A Credit Support Document taking the form found in Exhibit III of Attachment L of this Tariff.

Cash Deposit: Cash collateral provided to Transmission Provider to secure Applicant's and/or Tariff Customer's performance under the terms and conditions of Transmission Provider's Tariff, and/or other agreements.

Catastrophic Generator Outage: A forced outage that results in a unit being, or reasonably expected to be unavailable for a minimum of six (6) continuous months, which is not the result of a planned maintenance outage.

Category A Tariff Customer: A Tariff Customer who grants a continuing first-priority security interest to the Transmission Provider in all right, title and interest in any and all accounts receivable and other rights of payment of the Tariff Customer for goods and services provided under, or otherwise arising under, pursuant to or in connection with, the Tariff and/or any of the Agreements.

Category B Tariff Customer: Any Tariff Customer who does not grant a Receivable Security Interest to the Transmission Provider.

Change in Total System Cost: The net change in variable operational costs, which include fuel, variable O&M, variable environmental costs, and other variable costs as mutually agreed upon by the Transmission Provider and the Market Participant, measured in dollars as a result of changing the output of one or more units in response to a redispatch request from the Transmission Provider.

Charge: The withdrawal of energy from the Transmission System by an Electric Storage Resource for the purpose of storing the energy for injection back into the Transmission System at a later time.

Cleared Zonal Resource Credits (Cleared ZRCs): Zonal Resource Credits that have cleared the

Planning Resource Auction, were used in a Fixed Resource Adequacy Plan, were used in a Reliability Based Demand Curve Opt Out, or are currently being used to replace ZRCs.

Coincident Peak Demand: The Demand in MWs, for an LSE and/or EDC, that occurs coincident to the peak Demand for each Season in the Transmission Provider Region, where all Demand has been augmented to include any known reductions in Demand related to LMRs.

Co-located Resources: Two or more Generators located behind the same point of interconnection that participate separately in the Energy and Operating Reserve Markets and share an Interconnection Service Limit.

Combined Reliability Systems: The Reliability Coordination Customer Transmission Facilities and all other transmission facilities for which the Transmission Provider performs Reliability Coordination Services under Part I of Module F.

Commercial Model: A presentation of the relationships between Market Participants and their Resources, Commercial Pricing Nodes and the Network Model in the Energy and Operating Reserve Markets.

Commercial Operation Date: Shall have the meaning set forth in Attachment X of this Tariff.

Commercial Pricing Node (CPNode): An Elemental Pricing Node or an Aggregate Price Node in the Commercial Model used to schedule and settle Market Activities. Commercial Pricing Nodes include Resources, Hubs, Load Zones and/or Interfaces.

Commercially Significant Voltage and Local Reliability Issue: Transmission System voltage or other local reliability concerns that result in Voltage and Local Reliability Commitments. These issues are designated for reasons including, but not limited to, occurrence

frequency, monetary impact, or other criteria as defined in Schedule 44. A Local Balancing Authority or an interested Market Participant may request that the Transmission Provider evaluate a Voltage and Local Reliability Issue for designation as commercially significant.

Commission: The Federal Energy Regulatory Commission, also known as FERC, or its successor.

Commitment Status: A specification submitted by a Market Participant in its Generation Offer, External Asynchronous Resource Offer, Demand Response Resource-Type I Offer, Demand Response Resource-Type II Offer, or Electric Storage Resource Offer for each Hour to indicate whether or how the Transmission Provider is authorized to commit the Resource or deploy the Resource for Operating Reserves for the Hour.

Common Bus: A single Bus to which two or more Resources are connected in an electrically equivalent manner where such Resources are treated as a single Resource for compliance monitoring purposes.

Common Information Model (CIM): The format adopted by the NERC Data Exchange Working Group that will be used by the Congestion Management Customer and the Transmission Provider to exchange Energy Management System models once a year.

Comparable FTRs: FTRs that are identical in all material respects except for the quantity of MW specified.

Competitive Developer Qualification Process: The process utilized to certify Qualified Transmission Developers pursuant to Section VIII.B of Attachment FF of the Tariff.

Competitive Developer Selection Process: The process utilized to solicit Proposals, evaluate

Proposals, and designating a Selected Proposal and Selected Developer(s) pursuant to Section VIII of Attachment FF of the Tariff.

Competitive Substation Facility: A transmission substation facility contained within an Eligible Project that is subject to the Competitive Developer Selection Process in accordance with Section VIII.A of Attachment FF of the Tariff.

Competitive Transmission Executive Committee: A committee consisting of three (3) or more executive staff of the Transmission Provider, including at least one (1) officer, that is charged with overseeing all Transmission Provider staff and consultants involved in evaluating Transmission Developer Applications and Proposals in response to a posted Request for Proposal. The Competitive Transmission Executive Committee will have exclusive and final decision-making authority over: (i) the certification and termination of Qualified Transmission Developers; and (ii) the evaluation and selection of Proposals, resulting in designating Selected Developers. The Competitive Transmission Executive Committee shall possess the specific technical, financial, and regulatory expertise necessary for evaluation of Transmission Developer Applications and Proposals.

Competitive Transmission Facility: A Competitive Substation Facility or Competitive Transmission Line Facility.

Competitive Transmission Line Facility: A transmission line facility contained within an Eligible Project that is subject to the Competitive Developer Selection Process in accordance with Section VIII.A of Attachment FF of the Tariff.

Competitive Transmission Process: The process utilized to certify Qualified Transmission Developers, identify Competitive Transmission Projects, solicit Proposals, evaluate

Proposals, and designating a Selected Proposal and Selected Developer(s) pursuant to Section VIII of Attachment FF of the Tariff. The Competitive Transmission Process includes the Competitive Developer Qualification Process and Competitive Developer Selection Process.

Competitive Transmission Project: The Competitive Transmission Facilities contained within an Eligible Project.

Competitively Sensitive Information: Information that is not public and the unauthorized disclosure of which could have anti-competitive effects, provide a competitor with an unfair or improper competitive advantage, or unfairly or improperly result in competitive harm, detriment, prejudice, disadvantage or injury to the legitimate proprietary rights, business or commercial interests, market position, or ability to bargain freely, of the lawful owners, possessors or users of such information.

Completed Application: An Application that satisfies all of the information and other requirements of the Tariff, including any required deposit.

Composite Credit Score: A composite numerical score scaled from 1.00 to 6.99, representing the sum of the Qualitative and Quantitative score as calculated by the Transmission Provider's credit scoring model in Attachment L of this Tariff.

Computational Load: Large Load comprised of 25 MW or more of Demand from information technology equipment, such as servers, storage, and networking hardware.

Confidential Information: Any proprietary or commercially or competitively sensitive information, trade secret or information regarding a plan, specification, pattern, procedure, design, device, list, concept, policy or compilation relating to the present or

planned business of a Transmission Customer, Market Participant, or other user, which is designated as confidential by the entity supplying the information, whether conveyed orally, electronically, in writing, through inspection, or otherwise, that is received by the Transmission Provider and is not disclosed except under the terms of a Confidential Information policy.

Congestion Management Customer: Any entity taking Interconnected Operations and Congestion Management Service under Part II of Module F.

Congestion Management Process (CMP): The process described in Attachment LL of the Tariff.

Constraint Contribution Factor: Factor that represents the impact that an incremental Actual Energy Injection or Actual Energy Withdrawal of one MW has on a given Active Transmission Constraint.

Constraint Generation Shift Factor Cutoff: A Generation Shift Factor level defined for each transmission constraint that determines the generating units to be included in a Broad Constrained Area, Narrow Constrained Area or Dynamic NCA associated with the constraint. Generation Resources with a Generation Shift Factor whose absolute value is greater than the Constraint Generation Shift Factor Cutoff are included in the Broad Constrained Area, Narrow Constrained Area or Dynamic NCA.

Constraint Management Charge Allocation Factor: A factor that is used to apportion Real-Time Revenue Sufficiency Guarantee Credits in an Hour between (i) the Real-Time Revenue Sufficiency Guarantee Constraint Management Charge and (ii) the Real-Time Revenue Sufficiency Guarantee Day-Ahead Schedule Deviation Charge and the Real-

Time Revenue Sufficiency Guarantee Headroom Charge.

Contingency Reserve: Spinning Reserve and Supplemental Reserve provided by Resources available to the Transmission Provider to use in the event of a system contingency as specified in Schedule 5-Spinning Reserve and Schedule 6– Supplemental Reserve of this Tariff.

Contingency Reserve Deployment Failure Charge: A charge assessed to any Resource that fails to achieve in a Contingency Reserve Deployment Period at least one hundred percent (100%) of the Contingency Reserve Deployment Instruction target.

Contingency Reserve Deployment Instruction: An instruction issued by the Transmission Provider to Resources with cleared Contingency Reserve to deploy a specific MW quantity of cleared Contingency Reserve as communicated via Setpoint Instructions or other electronic means.

Contingency Reserve Deployment Period: The period of time the Resource has to deploy Contingency Reserve following the issuance of a Contingency Reserve Deployment Instruction that is equal to ten minutes.

Contingency Reserve Offer Price Cap: The maximum price permitted for a Spinning Reserve Offer, an On-Line Supplemental Reserve Offer, an Off-Line Supplemental Reserve Offer or a Supplemental Reserve Offer in the Energy and Operating Reserve Markets.

Continuing Error: A continuing software, system or other execution that is inconsistent with the Tariff.

Control: The possession, directly or indirectly, of the power to direct the management or policies of a person or an entity. A voting interest of ten percent (10%) or more shall

create a rebuttable presumption of Control.

Controllable Devices: Devices that may include phase shifters, DC lines, and back-to-back AC/DC converters.

Co-optimized Zonal Contingency Reserve Requirement: The minimum amount of Contingency Reserve the Transmission Provider needs to procure within a Reserve Zone as determined based upon co-optimization with Post Reserve Deployment Constraints.

Co-optimized Zonal Operating Reserve Requirement: The sum of the Co-optimized Zonal Contingency Reserve Requirement and Co-optimized Zonal Regulating Reserve Requirement.

Co-optimized Zonal Regulating Reserve Requirement: The minimum amount of Regulating Reserve the Transmission Provider needs to procure within a Reserve Zone as determined based upon co-optimization with Post Reserve Deployment Constraints.

Co-optimized Zonal Short-Term Reserve Requirement: The minimum amount of Short-Term Reserve the Transmission Provider needs to procure within a Reserve Zone as determined based upon co-optimization with Post Reserve Deployment Constraints.

Co-optimized Zonal Spinning Reserve Requirement: The minimum amount of Spinning Reserve the Transmission Provider needs to procure within a Reserve Zone as determined based upon co-optimization with Post Reserve Deployment Constraints.

Coordinated Flowgate: A Flowgate that is subject to the Transmission Provider's or Coordination Customer's operational control and through which flows are affected by transmission over transmission facilities within its operational control, or with respect to which Transmission Provider serves as a Reliability Authority.

Coordinated Transaction Schedule: An Interchange Schedule to purchase Energy in the Real-Time Energy and Operating Reserve Market from a Source Point in either the MISO Balancing Authority Area or PJM Balancing Authority Area and sell it at a Sink Point in the other balancing authority area that is cleared if the forecasted LMP at the Sink Point minus the forecasted LMP at the Source Point is greater than or equal to the dollar value specified in the bid associated with the Interchange Schedule.

Coordinating Owner: Any entity that is not subject to the jurisdiction of the Commission but participating in the ISO through the execution of a coordination agreement which includes provisions for the elimination of rate pancaking. The terms and provisions of a Coordinating Owner's coordination agreement shall supersede the similar terms and provisions of this Tariff where applicable.

Coordination Customer: Any customer taking Coordination Services from the Transmission Provider pursuant to Module F of the Tariff. The term Coordination Customer includes: Reliability Coordination Customer, and Congestion Management Customer.

Coordination Services: The services provided by the Transmission Provider pursuant to Module F of the Tariff. Coordination Services include Reliability Coordination Service and Interconnected Operations and Congestion Management Service.

Corporate Guaranty: A legal document taking the form found in Exhibit I of Attachment L of this Tariff used by an Affiliate of an Applicant and/or Tariff Customer that guarantees the obligations of such Applicant or Tariff Customer.

Cost Allocation Zone: The zones identified in Attachment WW of this Tariff used for allocating the costs of Market Efficiency Projects.

Cost of Congestion: The Marginal Congestion Component of LMP at the sink minus the Marginal Congestion Component of LMP at the source.

Cost of Losses: Marginal Losses Component of LMP at the sink minus the Marginal Losses Component of LMP at the source.

Cost of New Entry (CONE): The capital, operating, financial and other costs of acquiring a new Generation Resource within the Transmission Provider Region for any designated LRZ.

Council of the City of New Orleans (CNO): The governmental body with the power of supervision, regulation, and control over public utilities providing service within the City of New Orleans, *i.e.*, Entergy New Orleans, pursuant to the Constitution of the State of Louisiana and the Home Rule Charter of the City of New Orleans. CNO shall have all the rights and responsibilities granted herein to states, state public utility commissions, state agencies, and State Regulatory Authorities.

Counterflow ARR: ARR allocated during the LTTR Restoration and Termination Stage of an Annual ARR Allocation based on a Counterflow ARR Entitlement.

Counterflow ARR Entitlement: Any Stage 1A eligible ARR Entitlement's portion that was not nominated in Stage 1A of a Market Participant's year 1 Annual ARR Allocation but that the Transmission Provider deems to provide counterflow necessary to enable curtailed Stage 1A CARRs to be restored (fully or partly) during the LTTR Restoration and Termination Stage of an Annual ARR Allocation.

Credit and Security Agreement: A Credit Support Document taking the form found in Exhibit V of Attachment L of this Tariff.

Credit Policy: The Transmission Provider's creditworthiness requirements and credit evaluation

procedures as contained in Attachment L of this Tariff.

Credit Support Documents: Any agreement or instrument in any way guaranteeing or securing any or all of a Tariff Customer's obligations under this Tariff (including, without limitation, the Credit Policy), any agreement entered into under, pursuant to, or in connection with this Tariff or any agreement entered into under, pursuant to, or in connection with this Tariff or the Credit Policy, and/or any other agreement to which the Transmission Provider and the Tariff Customer are parties, including, without limitation, any Corporate Guaranty, Cash Collateral Agreement, Letter of Credit, Credit and Security Agreement or agreement granting a security interest.

Critical Energy Infrastructure Information (CEII): Confidential information described in 18 C.F.R § 388.113(c)(1), as may be amended from time to time.

Curtailment: A reduction in firm or non-firm Transmission Service in response to a transfer capability shortage as a result of system reliability conditions pursuant to Section 14.7 or Section 27A of this Tariff.

Customer Load Aggregation: A Load Zone approved by the Transmission Provider for the purposes of submitting Bids to or scheduling into the Energy and Operating Reserve Markets and for settlement of Market Activities.

Cyber Exigency: A suspicious electronic act or event that has the potential to compromise reliability within the Transmission Provider Region or other electrical facilities directly or indirectly connected to the Transmission System and whose severity reasonably requires that the Transmission Provider obtain expert assistance not normally called upon to counter such an electronic act or to resolve such an event.

Large Load: Load with Demand of 50 MW or more associated with any facility or aggregation of facilities located at a single substation behind one or more Point(s) of Withdrawal from the Transmission System that is owned, operated, or controlled by: (a) a single entity, or (b) a group of entities that will coordinate with respect to the profile of the Load. Large Load does not include Load used exclusively for charging an Electric Storage Resource.

Large Load Equipment: Any of the facilities, devices, or equipment that constitutes a part of a Large Load, or are used to interconnect the Large Load to the Transmission System.

Legitimate Risks: Business operation risks, incurred by a Market Participant, that increase as a result of providing any of the products described in the Tariff. These risks include, but are not limited to, the risk of repair expenses; business interruption due to outages resulting from either a failure to start, or unplanned outages that occur when the facility is in service; regulatory restrictions; and disruptions from labor relations problems. These risks are in the nature of marginal costs included in Reference Levels. In contrast, the risk associated with fuel purchase price is not a component of Reference Levels, but rather a basis for the Fuel Cost Uncertainty Adder and some of the conduct thresholds under Module D.

Letter of Credit: A Credit Support Document taking the form found in Exhibit II of Attachment L to this Tariff.

Line Outage Distribution Factor (LODF): The percent of flow on line A, which is transferred to line B for the loss of line A.

Load: A term that refers to either an end-user of Energy, net of system losses, or the amount of Energy (MWh) consumed by such end-user within the Transmission Provider Region.

Load Forecast: An estimate of the amount of Energy (MWh) or Capacity (MW) to be consumed within the Transmission Provider's Region, prepared by the Transmission Provider based upon input from Local Balancing Authorities and Load Serving Entities, and used in the Transmission Provider's scheduling and dispatch decisions to ensure reliable operation of the MISO Balancing Authority.

Load Modifying Resource: A Demand Resource or Behind the Meter Generation Resource.

Load Modifying Resource Market Participant (LMR MP): A Market Participant that has the rights to control the energy demand or the energy production from a Load Modifying Resource.

Load Ratio Share: Ratio of a Transmission Customer's Network Load in a Zone to the total Load in that pricing Zone computed in accordance with Module B, Section 34.2 of this Tariff.

Load Serving Entity (LSE): Any entity that has undertaken an obligation to serve Load for end-use customers by statute, franchise, regulatory requirement or contract for Load located within or attached to the Transmission System, including but not limited to purchase-selling entities and retail power marketers with the obligation to serve Load. Where a distribution cooperative or a municipal distribution system otherwise covered by the prior sentence is a wholesale customer of a generation and transmission cooperative or a municipal Joint Action Agency, the generation and transmission cooperative, a state or federal agency or municipal Joint Action Agency may act as the Load Serving Entity for such distribution cooperative or municipal distribution system. Where retail Load switching occurs in a state, the entity with the obligation to serve Load is the LSE

Load Shedding: The systematic reduction of system demand by temporarily decreasing Load in response to a Transmission System Emergency, Local Transmission Emergency, or MISO Balancing Authority Area or Sub-Area Capacity shortages, system instability, or voltage control considerations under Module B and Module C, of this Tariff.

Load Zone: A Zone determined by Market Participants representing an aggregate area of consumption for a single Load Serving Entity within the MISO Balancing Authority Area and used for the purposes of scheduling, reporting Actual Energy Withdrawal volumes, and settling Energy transactions at aggregated Load levels, approved and maintained by the Transmission Provider to facilitate transactions.

Local Balancing Authority (LBA): An operational entity or a Joint Registration Organization which is (i) responsible for compliance to NERC for the subset of NERC Balancing Authority Reliability Standards defined in the Balancing Authority Agreement for their local area within the MISO Balancing Authority Area, (ii) a Party to Balancing Authority Agreement, excluding MISO, and (iii) shown in Appendix A to the Balancing Authority Agreement.

Local Balancing Authority Area: Shall have the meaning set forth in the Balancing Authority Agreement.

Local Clearing Requirement (LCR): The minimum amount of Seasonal Accredited Capacity for an LRZ that is required to meet its LOLE for each Season while fully using the Zonal Import Ability for such LRZ and accounting for controllable exports.

Local Clearing Requirement Charge: A charge that is assessed to Load Serving Entities whenever an LRZ's Auction Clearing Price for a Season is increased due to its LCR

being greater than the sum of individual Final PRMR of the LSEs.

Local Reliability Requirement (LRR): The minimum amount of Unforced Capacity for an LRZ to meet its LOLE for each Season, without considering transmission ties to systems outside of the LRZ.

Local Resource Zone (LRZ): A geographic area within the Transmission Provider Region that is prescribed by the Transmission Provider, based upon the criteria in Section 68A.3, to address congestion that limits Planning Resource deliverability.

Local Resource Zone Peak Demand: The Demand in MWs, for an LSE and/or EDC, in a Local Resource Zone that occurs coincident to the peak Demand for each Season in the Local Resource Zone, where all Demand has been augmented to include any known reductions in Demand related to LMRs.

Local Short-Term Reserve: Short-Term Reserve available to the Transmission Provider to address transmission constraints in any Reserve Zone(s).

Local Short-Term Reserve Requirements: The amount of Local Short-Term Reserve, as determined pursuant to Module C of the Tariff, that the Transmission Provider is required to procure in a Reserve Zone.

Local Transmission Emergency: Transmission System conditions or events that have the potential to exceed or have exceeded operating limits that do not pose a risk of cascading to the interconnection but require emergency-level actions.

Locational Marginal Price (LMP): A price for Energy at a given Commercial Pricing Node in the Transmission Provider Region which is the marginal cost of serving demand at the Commercial Pricing Node while meeting Zonal and Market-Wide Operating Reserve

Requirements, Up Ramp Capability requirements, Down Ramp Capability requirements, and Short-Term Reserve Requirements. Such price may be either Ex Ante or Ex Post.

Long-Term Firm Point-To-Point Transmission Service: Firm Point To Point Transmission Service under Module B of this Tariff with a term of one (1) year or more.

Long Term Transmission Rights (LTTR): ARRs allocated in Stage 1A of the Annual ARR Allocation process. LTTRs carry annual rollover rights lasting ten (10) years or more.

Look Ahead Commitment (LAC): A process performed during the Real-Time Energy and Operating Reserve Market that develops Resource commitment and decommitment options that may be used by the Transmission Provider to ensure sufficient Resources will be available to meet Load Forecast, Operating Reserve, Up Ramp Capability, Down Ramp Capability, Short-Term Reserve and other demand requirements for the near term intra-hour intervals.

Loss of Load Expectation (LOLE): An estimate of the average number of days with supply interruption to end use customers, whether for a single hour or multiple hours in a day.

Loss of Load Probability Curve: The probability of shedding firm Load under varying levels of Contingency Reserve shortages, to be used in accordance with Schedule 28. This curve is further described in the Transmission Provider's Business Practices Manual for the Energy and Operating Reserves Markets (BPM-002).

Loss Pools: A single Local Balancing Authority Area or an aggregation of Local Balancing Authority Areas, including those Local Balancing Authority Areas operated by Coordinating Owners consistent with the terms and provisions of the Coordinating Owners agreement, designated by the Transmission Provider for the purposes of

calculating and distributing Day Ahead and Real Time Hourly Marginal Losses Revenue Surplus.

Lost Opportunity Cost: The LMP revenues that were not realized relative to a theoretical future operating point.

Partial-Year FTR Allocation: The procedure used by the Transmission Provider to allocate FTRs to Market Participants in the new ARR Zones added as a result of Transmission Provider Region expansion that becomes effective after the start of the Annual ARR Allocation period. The Partial-Year FTR Allocation will cover the partial year period when the new ARR Zone(s) become effective to the start of the next Annual ARR Allocation. For the partial year period, the Market Participants in the new ARR Zone(s) may request an allocation of FTRs, which will be in lieu of an allocation of ARRs.

Party(ies): The Transmission Provider, ITC where appropriate, Market Participants, Transmission Customers, or any combination of the above.

Past Due Amount: Any amount invoiced by the Transmission Provider that is not paid when due.

Peak Reserved Source Set: Set of Resources including those constituting the Baseload Reserved Source Point that have met the Resource Qualification Requirements for inclusion as a Reserved Source Point for a given ARR Zone.

Peak Usage: A Market Participant's Total Forecasted Peak Load in a given ARR Zone for the upcoming Annual ARR Allocation period calculated using the immediate prior three year actual peak Loads. The Total Forecast Peak Load is the sum of the forecast Network Integration Transmission Service peak Load for the upcoming allocation period plus peak Load served by Option A – Grandfathered Agreements plus peak Load served by Option B – Grandfathered Agreements.

Penalty Level: A component of a mitigation measure described in Module D that represents the amount of Energy purchased by a Market Participant that is an LSE or represents an LSE

in the Real Time Energy Market in excess of the Allowance Level the entity is subject to.

Physical Withholding Threshold Quantity: Threshold employed by the IMM to identify physical withholding by a supplier of Planning Resources for the Planning Resource Auction, expressed in MW.

Plan: The Transmission Provider's Market Monitoring Plan set forth in Module D of this Tariff.

Planned Transmission Outage: Any transmission outage scheduled for the performance of maintenance or repairs or the implementation of a system enhancement which is planned in advance for pre-determined duration and which meets the notification requirements for such outages as specified by the Transmission Provider.

Planning Advisory Committee: A committee of stakeholders established under the ISO Agreement for the purpose of providing input to the planning staff on the development of the MTEP.

Planning Area(s): A collective or alternative reference to the First Planning Area and/or the Second Planning Area.

Planning Coordinator: The entity responsible for the longer term reliability of its planning coordinator area.

Planning Reserve Margin (PRM): The percentage above forecasted Coincident Peak Demand of Planning Resources for the Transmission Provider Region in order to meet the LOLE. This percentage will include a quantity sufficient to cover transmission losses.

Planning Reserve Margin Requirement (PRMR): The amount of ZRCs required of each LSE with Coincident Peak Demand in an LRZ to meet the LSE's Resource Adequacy Requirements in each Season.

Planning Resource: A Capacity Resource or Load Modifying Resource that can be used to satisfy PRMR.

Planning Resource Auction (PRA): Auctions conducted by the Transmission Provider to determine the ACP and the cleared ZRC Offers for each LRZ and ERZ for each Season in the applicable Planning Year.

Planning Year: The period of time from June 1st of one year to May 31st of the following year that is used for developing Resource Plans. The first Planning Year shall commence on June 1, 2009.

PMAX: The maximum Generator real power output reported in MWs on a seasonal basis.

PMIN: The minimum Generator real power output reported in MWs on a seasonal basis.

Point(s) of Delivery: Point(s) on the Transmission System where Capacity and Energy transmitted by the Transmission Provider will be made available to the Receiving Party under Module B and Module C of this Tariff. The Point(s) of Delivery shall be specified in the Service Agreement for Long Term Firm Point To Point Transmission Service or the HVDC Service Agreement.

Point(s) of Receipt: Point(s) of interconnection on the Transmission System where Capacity and Energy will be made available to the Transmission Provider by the Delivering Party under Module B and Module C of this Tariff. The Point(s) of Receipt shall be specified in the Service Agreement for Long Term Firm Point To Point Transmission Service or the HVDC Service Agreement.

Point(s) of Withdrawal: The point(s) where a non-transmission facility that is used to withdraw Energy from the Transmission System to serve Load connects to the Transmission

System.

Point-To-Point Transmission Service: The reservation of Capacity and of Energy on either a firm or non firm basis from the Point(s) of Receipt to the Point(s) of Delivery under Module B of this Tariff.

Portfolio: For Multi-Value Project purposes, means two or more Multi-Value Projects proposed to be located in one or more Transmission Pricing Zones that, when evaluated together, are expected to result in system-wide benefits across the MISO footprint or benefits across the subregion. For purposes of the Portfolio, subregion refers to either the MISO Midwest MVP Cost Allocation Subregion or MISO South MVP Cost Allocation Subregion.

Post Reserve Deployment Constraints: The post zonal Operating Reserve and Short-Term Reserve deployment flows on the transmission constraints and Sub-Regional Power Balance Constraints, used to determine the Co-optimized Zonal Regulating Reserve Requirement, Co-optimized Zonal Contingency Reserve Requirement, Co-optimized Zonal Spinning Reserve Requirement, and Co-optimized Zonal Short-Term Reserve Requirement, for each Reserve Zone.

Post Reserve Deployment Constraints Demand Curve: Demand curves used to price Post Reserve Deployment Constraints.

Power Purchaser: The entity that is purchasing the Capacity and reserved Energy to be transmitted under this Tariff.

PPA Schedule: Schedule associated with a PPA that is executed after April 3, 2014.

Pre-Confirmed Application: An Application that commits the Eligible Customer to execute a Service Agreement upon receipt of notification that the Transmission Provider can

provide the requested Transmission Service.

Price Sensitive Demand Bids: Demand Bids in which the Market Participant specifies a maximum price (dollars per MWh) at which the Market Participant desires to purchase the designated MWh of Energy.

Price Taker: A Market Participant with an Energy and/or Operating Reserve Offer not capable of setting LMPs or MCPs.

Production Costs: The Energy output cost of a Generation Resource or a Demand Response Resource-Type II based upon Start Up, No Load and Energy Offer cost components set forth in an Offer or the Energy reduction cost of a Demand Response Resource-Type I based upon Shut Down Offer, Hourly Curtailment Offer and Energy Offer cost components set forth in an Offer.

Project Cost: All costs for Network Upgrades, as determined by the Transmission Provider to be a single transmission expansion project, including those costs associated with seeking and obtaining all necessary approvals for the design, engineering, construction, and testing of the Network Upgrades. These Network Upgrades will include costs classified by the Transmission Owners and Independent Transmission Companies as transmission plant using the Uniform System of Accounts 350 through 359 or equivalent set of accounts for any Coordinating Owner.

Project Financial Security: The Cash Deposit or Irrevocable Letter of Credit described in Appendix 1 to Attachment FF of the Tariff that a Selected Developer is required to provide.

Proposal: A proposal to construct, implement, own, operate, maintain, repair, and restore all

Competitive Transmission Facilities associated with a Competitive Transmission Project, in response to a Request for Proposal. Proposals may be submitted in one of two different forms: (i) a Single-Developer Proposal; or (ii) a Joint-Developer Proposal. The term "Proposal" shall include "Single-Developer Proposal" and "Joint-Developer Proposal".

Proposal Cure Period: A period of time, as set forth within Attachment FF, Section VIII.D.10, allowed for an RFP Respondent to correct deficiencies identified by the Transmission Provider in its previously submitted Proposal. The Proposal Cure Period commences upon notification by the Transmission Provider to an RFP Respondent of deficiencies in its Proposal.

Proposal Participant(s): Any entity or entities involved in a Proposal, excluding the RFP Respondent(s), that will co-own the Competitive Transmission Project and rely on the RFP Respondent(s) to be the Selected Developer(s) responsible for constructing and implementing the Competitive Transmission Facilities associated with the Competitive Transmission Project. Proposal Participants may be identified in a Proposal as responsible for one or more aspects of operations, maintenance, repair, or restoration, on terms comparable to those that would apply if the RFP Respondent(s) intended to rely on a third-party contractor.

Proposal Submission Deadline: The date and time Proposals must be submitted to the Transmission Provider by in order to be considered and evaluated by the Transmission Provider. The Submission Deadline shall be no later than 5:00 PM EPT on the date specified in the RFP, which shall not exceed one hundred and sixty-five (165) Calendar Days from the date the RFP was issued by the Transmission Provider, unless such date falls on a Saturday, Sunday, or MISO observed holiday in which case the Proposal Submission Deadline shall be

the next Business Day that is not a MISO observed holiday.

Proposed Generator Planned Outage: The planned removal from service, in whole or in part, of a Generation Resource for inspection, maintenance or repair for which the Generation Owner has sought or will seek approval from the Transmission Provider for such planned removal in accordance with the Business Practices Manuals.

Protected Information: Privileged and non public information to be maintained by the Transmission Provider.

Proxy Offers: The Offers created for resources that are deployed during Emergency operating procedures by the Transmission Provider as specified in Schedule 29A.

Pseudo-tie: A telemetered reading or value that is updated in real time and used as a tie line flow in the Area Control Error equation but for which no physical tie or energy metering actually exists. The integrated value is used as a metered MWh value for interchange accounting purposes. Pseudo tied status of Resources and Loads may only be changed during Network Model updates and the timing of such updates shall be as defined in the Business Practices Manuals.

Pseudo-tie Agreement: The Agreement between MISO and a Market Participant included as Attachment FFF-1 or Attachment FFF-2 to this Tariff, as applicable, outlining the terms and conditions of the real-time transfer of control of a generating unit or load to (or from) the MISO Balancing Authority Area from (or to) a specified external Balancing Authority Area.

Public Power: For credit scoring purposes, an Applicant or Market Participant that is a not for profit municipality, cooperative, Joint Action Agency, or agent representing one or more Public Power entities and whose credit quality is directly derived from the credit quality

of the Public Power entities represented through the agency relationship.

Public Power Composite Score: For credit scoring purposes, the weighted average value of the Public Power Qualitative Score and the Public Power Quantitative Score. The relative weights are sixty percent (60%) and forty percent (40%).

Public Power Qualitative Score: A component of a Public Power Composite Score which has, for credit scoring purposes, a value ranging from 1 to 6.99, with 1 being the best and 6.99 being the worst. The value is based on a review by the Transmission Provider of qualitative factors relative to an Applicant's business, including but not limited to: i) regulatory; ii) legal; iii) demographic; and iv) energy supply/price factors as provided in Attachment L to this Tariff.

Public Power Quantitative Score: A component of a Public Power Composite Score which has, for credit scoring purposes, a value ranging from 1 to 6.99, with 1 being the best and 6.99 being the worst. The value is based on a review by the Transmission Provider of various financial metrics as detailed in the Transmission Provider's credit scoring model in Attachment L.

I. Applicability of Large Load Reliability Requirements

The Transmission Customer taking Transmission Service on behalf of a Large Load shall be responsible for complying with each of the requirements of this Section 37A applicable to each Large Load it represents.

Except as set forth in Section 37A.II, all Large Load shall be subject to the Basic Facility Data, Modeling, Telemetry, Forecast Data, and Audit requirements set forth in Sections 37A.1 through 37A.4 and section 37A.8 of the Tariff.

Except as set forth in Section 37A.II, Computational Load, shall be subject to the Phasor Measurement Unit, Ride-Through and Ramp requirements set forth in Sections 37A.5 through 37A.7 of the Tariff. The Transmission Provider shall determine whether Computational Load is associated with a Large Load based on information provided by the Transmission Customer to the Transmission Provider for such purpose, as set forth in the Business Practices Manual for Large Load.

A Transmission Customer taking Transmission Service on behalf of a Large Load shall demonstrate its ability to effectuate compliance with each of the requirements of this Section 37A. The Transmission Customer shall provide the Transmission Provider with documentation necessary for the Transmission Provider to verify compliance with the requirements of this Section 37A. Such documentation may include applicable agreement(s), if any, between the Transmission Customer and the entity or entities that own, operate or use the Large Load, or an attestation signed by an authorized officer of the Transmission Customer demonstrating that the Transmission Customer will be provided access to all information reasonably required to enable the Transmission Customer to comply with and for the requirements of this Section 37A,

including compliance with the terms of any operating protocols adopted by the Transmission Provider, Transmission Owner and/or the Transmission Customer for a specific Large Load.

Failure to comply with the requirements established in this Section 37A may result in a delayed Service Commencement Date, a period of time needed for corrective action, operational limitations, or other remediation action(s) by Transmission Provider as may be necessary to maintain Transmission System reliability. The process by which Transmission Provider will determine whether any such measures are appropriate, which may include the period of time during which corrective action must be undertaken, shall be as set forth in the Business Practices Manual for Large Load.

II. Transition Provisions

1) For purposes of these transition provisions, Load associated with a transmission project shall be defined as meeting the "MTEP/EPR Condition" if the project has either: (a) been approved by the Transmission Provider Board in MTEP 2026, or a prior MTEP; or, (b) been submitted to the Transmission Provider for Expedited Project Review (EPR) on or prior to June 18, 2026, in accordance with Attachment FF of the Tariff.

2) A Transmission Customer taking Transmission Service on behalf of a Large Load shall ensure that all Large Load shall be subject to all the requirements as set forth in this Section 37A, provided that:

(a) Fully Exempt Large Load:

A Large Load that has a Service Commencement Date on or prior to December 4, 2026, shall be exempt from all requirements set forth in this Section 37A with respect to the portion of the Large Load that has

procured Transmission Service as of the Service Commencement Date. Any modification or series of modifications to a Load that meets the MTEP/EPR Condition, which results in a cumulative increase of 25 MW or more in Transmission Service for such Load and with a Service Commencement Date after December 4, 2026, shall be subject to subsection (2)(b) below.

(b) Partially Exempt Large Load:

(i) A Large Load, or a portion of a Large Load, that does not have a Service Commencement Date prior to December 4, 2026, but that meets the MTEP/EPR Condition as defined herein shall be subject to the requirements set forth in Sections 37A.1 through 37A.5 and Section 37A.8, and shall be exempt from the requirements set forth in Sections 37A.6 through 37A.7.

(ii) A Large Load, or a portion of Large Load, that does not have a Service Commencement Date prior to December 4, 2026, and that has not met the MTEP/EPR Condition but has submitted Load associated with a transmission project to the Transmission Provider for EPR on or after June 19, 2026, but on or before October 31, 2026, shall be subject to all requirements set forth in this Section 37A, provided that Transmission Provider may waive the requirements set forth in Section 37A.6 based upon a determination that: a) exemption from such requirements would not have an adverse reliability impact; and, b) compliance with such requirements would result in significant costs. The Business Practices

Manual for Large Load shall set forth the process and documentation necessary for Transmission Provider to determine whether such criteria have been met.

(c) Non-Exempt Large Load:

A Large Load, or a portion of a Large Load, that does not meet the MTEP/EPR Condition shall be subject to all applicable requirements set forth in this Section 37A.

3) Notwithstanding any of the provisions above the Transmission Provider has the right to require compliance with any or all requirements of this Section 37A if the Transmission Provider determines that operation of a Large Load results in a material adverse effect on Transmission System reliability. The process by which Transmission Provider will make such a determination and which, if any, of the requirements of this Section 37A are to be applied shall be as set forth in the Business Practices Manual for Large Load.

Large Load Information and Basic Facility Data Requirements

A Transmission Customer taking Transmission Service on behalf of a Large Load shall be responsible for providing the Transmission Provider with basic information, one-line diagrams, and a description of the electrical characteristics of the Large Load for all Large Load Equipment, in the format and consistent with the timelines specified in the Business Practice Manual for Large Load. Any changes to the characteristics of a Large Load and/or Large Load Equipment, including any changes to the modeling details for the Large Load, shall be provided to the Transmission Provider in a timely manner, consistent with the Business Practices Manual for Large Load. Such changes may include, but are not limited to, Load MW amounts, firm and non-firm MW amounts, any dispatchable Load MWs, power factor, metering, telemetry, breaker configuration, staged Load additions and annual energy as further set forth in the Business Practices Manual for Large Load.

A Transmission Customer taking Transmission Service on behalf of a Large Load must coordinate with the Transmission Owner where the Large Load Point(s) of Withdrawal is located pursuant to the Transmission Provider's load interconnection guidance and applicable NERC standards.

Large Load Modeling Requirements

A Transmission Customer taking Transmission Service on behalf of a Large Load shall provide the Transmission Provider with verified and complete electrical models of the Large Load, as well as detailed Load profiles, for modeled Loads, in the format and consistent with the timelines specified in the Business Practice Manual for Transmission Planning. Such model information must include sufficient detail for the Transmission Provider to evaluate system performance under contingency conditions in accordance with currently active versions of Transmission System Planning Performance Standards.

Following completion of applicable studies and prior to the Service Commencement Date of the Large Load, the Transmission Customer shall submit final verified models to the Transmission Provider in accordance with the Business Practices Manual for Large Load. The Transmission Customer shall provide notice to the Transmission Provider of any material modifications to the Large Load and shall not implement any such proposed modifications until studied and approved by the Transmission Provider in accordance with the Business Practices Manual for Large Load.

The final models of a Large Load shall reflect the as-built configuration and actual operating characteristics of the Large Load and Large Load Equipment. The Transmission Customer shall maintain and update models as required by the Transmission Provider.

Large Load Telemetry Requirements

Prior to the later of the Service Commencement Date of a Large Load or September 1, 2027, a Transmission Customer taking Transmission Service on behalf of a Large Load must provide real-time telemetry for the Large Load, either directly, through the applicable Transmission Owner, or other Transmission Provider-approved communication path, in the form and manner as set forth in the Business Practices Manual for Large Load.

Individual metering will be required for all Large Load and any Generation Resource(s) serving such Large Load that is located behind the same Point(s) of Withdrawal to the Transmission System as the Large Load and meeting thresholds outlined in the Business Practices Manual for Large Load. All telemetry shall be provided via Inter-Control Center Communications Protocol (ICCP) and must meet Transmission Provider update requirements as specified in the Business Practices Manual for Large Load. The Transmission Customer must use commercially reasonable efforts to maintain telemetry availability and accuracy for the Large Load and must promptly correct erroneous data, bad mappings, and ICCP modeling issues.

Large Load Forecast Data Requirements

Prior to the later of the Service Commencement Date of a Large Load or September 1, 2027, a Transmission Customer taking Transmission Service on behalf of a Large Load must provide day(s) ahead and real-time Load Forecasts for a Large Load directly to the Transmission Provider to support the Reliability Assessment Commitment (RAC) and Security Constrained Economic Dispatch (SCED) processes, along with other reliability studies. The Load Forecasts shall be updated to reflect the most current information on the expected Demand, in accordance with the Business Practices Manual for Large Load.

Large Load Phasor Measurement Unit Requirements

The Transmission Customer taking Transmission Service on behalf of a Computational Load shall be subject to the Phasor Measurement Unit (PMU) requirements set forth in this Section 37A.5. Prior to the later of the Service Commencement Date of a Large Load or September 1, 2027, phasor measurement recording and communications equipment must be installed by the Transmission Owner, at the Transmission Customer's expense, that is capable, at a minimum, of gathering phasor measurements as specified in Business Practices Manual for Large Load. The phasor measurement equipment must be installed at the Transmission Owner's side of the Point(s) of Withdrawal and become part of the Transmission Owner interconnection facilities. To the extent similar quality equipment is being added or already exists, such as relays or digital fault recorders, that can collect data at least at the same rate as PMU and which data is synchronized via a high-accuracy satellite clock, such equipment may be utilized to satisfy this requirement if the equipment is located on the Transmission Owner's side of the Point(s) of Withdrawal. Phasor measurements must be streamed in the format specified in the Business Practices Manual for Large Load and be provided to the Transmission Provider by the Transmission Owner.

Large Load Ride-Through Requirements

A Transmission Customer taking Transmission Service on behalf of a Computational Load shall be responsible for ensuring that the Computational Load remains connected to the Transmission System and continue operation during voltage and frequency disturbances within the performance criteria established by the Transmission Provider in the Business Practices Manual for Large Load.

Ride-through requirements apply at the Point(s) of Withdrawal and may include evaluation, testing, modeling, monitoring, and other compliance measures established by the Transmission Provider in the Business Practices Manual for Large Load.

Large Load Ramp Requirements

A Transmission Customer taking Transmission Service on behalf of a Computational Load shall be subject to the ramp requirements set forth in this Section 37A.7. Ramp limits shall be measured in aggregate across the applicable Point(s) of Withdrawal during stable-state transition, including any reduction/ramp smoothing provided by generation or other resources that meets the eligibility requirements specified in the Business Practices Manual for Large Load. Computational Load shall be subject to up-ramp and down-ramp limits established by the Transmission Provider consistent with the process set forth in the Business Practices Manual for Large Load. The Computational Load must have an effective up and down ramp rate not exceeding the specified limit outlined in the Business Practices Manual for Large Load unless otherwise directed by the Balancing Authority, Reliability Coordinator, or Transmission Operator.

Large Load Audit Rights

The Transmission Provider has the right to audit or verify the information provided by a Transmission Customer taking Transmission Service on behalf of a Large Load including, but not limited to, information related to the registration, claimed capacity, operations, modeling, inverter settings, metering, settlements, Large Load Equipment, and/or any other information related to the participation of the Large Load under this Tariff. The Transmission Customer shall maintain individual Large Load data and information related to the registration, Load Forecasts, operations, modeling, metering, and/or settlements for five (5) Years. The Transmission Provider shall maintain individual Large Load data and information it receives related to the registration, Load Forecasts, operations, modeling, metering, and/or settlements for five (5) Years.

Tab C

Document Accession #: 20260828-5278 Filed Date: 08/28/2026

Tab C

UNITED STATES OF AMERICA
BEFORE THE
FEDERAL ENERGY REGULATORY COMMISSION

Midcontinent Independent System Operator, Inc.	**)**	**Docket No. ER26-___-000**

PREPARED DIRECT TESTIMONY OF BEIBEI LI SENIOR MANAGER OF STRATEGIC ASSESSMENT

I. PROFESSIONAL BACKGROUND AND QUALIFICATIONS

Q. PLEASE STATE YOUR NAME, BUSINESS ADDRESS, AND RELATIONSHIP TO THE MIDCONTINENT INDEPENDENT SYSTEM OPERATOR, INC.

A. My name is Beibei Li. I am the Senior Manager of Strategic Assessment for the Midcontinent Independent System Operator, Inc. ("MISO"). My business address is 720 City Center Drive, Carmel, Indiana 46032.

Q. PLEASE DESCRIBE YOUR EDUCATION AND PROFESSIONAL BACKGROUND.

A. I hold Bachelor's degrees in both Electrical and Computer Engineering and Political Science from Purdue University. I also hold a Master's Degree in Electrical and Computer Engineering from Purdue University and an Executive MBA from the University of Chicago Booth School of Business. I began my career with MISO in 2008 as an Outage Coordination Engineer before progressing to Operations Engineer, Market Design Advisory, and Manager of Economic and Policy Planning, before assuming my current role of Senior Manager of Strategic Assessment.

Q. PLEASE DESCRIBE YOUR CURRENT ROLE AND JOB RESPONSIBILITIES.

A. As Senior Manager of Strategic Assessment, I lead MISO's evaluation and framing of emerging reliability risks and the development of practical, implementable solutions, including the ongoing operational requirements for Large Load.

Q. HAVE YOU PREVIOUSLY SUBMITTED TESTIMONY IN A REGULATORY PROCEEDING?

A. No.

II. PURPOSE OF TESTIMONY

Q. WHAT IS THE PURPOSE OF YOUR TESTIMONY?

A. The purpose of my testimony is to support MISO's proposal to apply a defined set of reliability requirements to certain loads, defined as Large Loads.[1]

Q. HOW DOES THE IRR FILING ADDRESS THE CONCERNS RAISED IN THE COMMISSION'S SHOW CAUSE ORDER RELATED TO LARGE LOADS IN THE MISO REGION?

A. As discussed below in greater detail, the IRR proposal defines "Large Load" and is responsive to several of the concerns raised by the Commission in the Order Instituting Proceeding Under Section 206 of the Federal Power Act[2] in Docket No. EL26-70-000 by proposing Tariff revisions that are responsive to the concerns raised in the Show Cause Order regarding ongoing operational requirements for Large Loads. More specifically, the IRR proposal includes Tariff revisions to include visibility, ramp rate, and disturbance ride-through requirements applicable to Large Loads, along with transition provisions to minimize disruption to commercial arrangements. The IRR proposal does not introduce new transmission service products, *pro forma* service agreements, or address potential cost shifting contemplated by the Show Cause Order. Matters involving new transmission service products, study processes and potential cost shifting for Large Loads will be

---

[1] As discussed below, MISO proposes to defined Large Load as Load with Demand of 50 MW or more associated with any facility or aggregation of facilities located at a single substation behind one or more Point(s) of Withdrawal from the Transmission System that is owned, operated, or controlled by: (a) a single entity or (b) a group of entities that will coordinate with respect to the profile of the Load. Large Load does not include Load used exclusively for charging an Electric Storage Resource.

[2] *Midcontinent Independent System Operator, Inc.,* Order Instituting Proceeding Under Section 206 of the Federal Power Act, 195 FERC ¶ 61,212 (2026) ("Show Cause Order" or "SCO").

addressed in future Federal Power Act Section 205 filings expected to be submitted prior to November 16, 2026.

III. THE RISE OF LARGE LOADS AND RELATED INTERCONNECTION REQUESTS

Q. PLEASE DESCRIBE THE EMERGENCE OF LARGE LOADS IN THE MISO REGION.

A. The MISO region is experiencing a significant increase in both the scale and pace of Large Load development. MISO's 2026 Long-Term Load Forecast[3] indicates that the region is experiencing load growth at levels not seen in decades, driven in large part by unprecedented large load activity and accelerating project announcements. Data centers and advanced manufacturing are among the primary drivers of this growth, with some projects seeking to develop on timelines significantly shorter than those traditionally associated with generation and transmission infrastructure. This combination of increased volume and accelerated development is changing the manner in which MISO must plan for and reliably integrate new load.

Q. PLEASE DESCRIBE THE RELIABILITY CONSIDERATIONS NECESSARY TO ACCOMMODATE THE ACCELERATED INTERCONNECTION OF LARGE LOADS IN THE MISO REGION.

A. Accommodating the accelerated interconnection of Large Loads requires MISO to ensure that the Transmission System can reliably plan for and operate these facilities as they come online. Key reliability considerations include sufficient visibility into Large Load

[3] *See* MISO's 2026 Long-Term Load Forecasting (LTLF) Results Summary (April 13, 2026), available at : https://cdn.misoenergy.org/20260413%20LTLF%20Workshop%202026%20Long%20Term%20Load%20Forecast%20Summary_UPDATED750524.pdf

characteristics and operating behavior, accurate forecasting and modeling, and requirements that address operational risks such as rapid change in demand, disturbance response, including ride-through capability.

Certain Large Load characteristics—including rapid changes in demand, sudden loss of significant load, or dynamic interactions between power-electronic equipment and the Transmission System—may affect system performance during normal operations and contingency conditions. Under certain system conditions, these behaviors may increase operational uncertainty, contribute to system stability concerns, affect post-disturbance recovery, stress transmission facilities, or create additional challenges in maintaining the real-time balance of supply and demand.

These considerations do not imply that all large loads create the same reliability risk. Reliability impacts may vary depending on facility type, operating characteristics, electrical design, system strength, and local transmission conditions. Accordingly, MISO's approach is intended to be scalable and risk-informed to ensure reliability requirements remain proportional to demonstrated system risk.

Q. PLEASE DESCRIBE THE NERC GUIDANCE AND INDUSTRY DIRECTION INFORMING THIS FILING.

A. The North American Electric Reliability Corporation ("NERC"), through the Large Loads Working Group, has identified emerging large loads as an increasing reliability consideration for the Bulk Power System. NERC has identified reliability risks associated with the rapid growth and changing characteristics of large loads and has issued whitepapers, incident reviews, a Reliability Guideline, and a Level 3 Alert addressing those

risks.[4] Across these efforts, NERC has emphasized the need for improved load data and modeling, real-time telemetry and high-resolution monitoring, more accurate near-term forecasting, information regarding ramping and operating characteristics, and better understanding of how large loads perform during grid disturbances.

The industry's direction is also moving beyond voluntary guidance toward formal reliability requirements. In 2026, NERC initiated Project 2026-02 to develop definitions, registration criteria, and Reliability Standards for computational load integrations.[5] On July 16, 2026, the Commission directed NERC to file by December 31, 2026, one or more new or modified Reliability Standards addressing Bulk-Power System reliability risks associated with the integration of computational loads and associated definitions. The Commission also directed NERC to develop revisions to its Rules of Procedure, including registry criteria necessary for the registration of computational load entities, and stated that it expects NERC to submit those proposed revisions by December 31, 2026.[6] Consistent with that directive, in August 2026, NERC opened 30-day comment periods on proposed Rules of Procedure revisions establishing registration criteria for computational load

---

[4] Essential Action to Industry – Computational Load Modeling, Studies, Instrumentation, Commissioning, Operations, Protection, and Control, NERC (May 4, 2026), *available at* https://www.nerc.com/globalassets/programs/bpsa/alerts/level-3-computational-load-alert.pdf; *See* Draft large Load Disturbance Performance, NERC (Dec. 10, 2026), *available at* https://www.nerc.com/globalassets/who-we-are/standing-committees/rstc/llwg/draft_llwg_white_paper_large_load_disturbance_performance_tosubmit.pdf.

[5] Project 2026-02 Computational Load, NERC, https://www.nerc.com/standards/reliability-standards-under-development/2026-02-computational-loads (last visited Aug. 27, 2026).

[6] *Reliability Standard(s) Pertaining to Computational Load Integration*, 196 FERC ¶ 61,031 (July 16, 2026).

entities and on proposed Reliability Standards CLO-001, CLO-002, and CLO-003 under Project 2026-02, with comments due September 18, 2026.[7]

MISO's IRR proposal is also consistent with the direction being taken by other ISOs and RTOs. In particular, FERC has accepted Southwest Power Pool's ("SPP") High Impact Large Load ("HILL") framework, which establishes enhanced study and ongoing reliability requirements for qualifying large loads.[8] Like MISO's IRR proposal, SPP's framework includes requirements addressing load forecasting, real-time telemetry, phasor measurement data, ride-through performance, and limitations on rapid changes in load demand. SPP specifically requires HILLs to provide real-time telemetry, comply with ramp limits, and meet ride-through requirements, and requires PMU or similar high-resolution measurement equipment to support model validation, dynamic performance monitoring, and post-event analysis.

MISO's proposed framework addresses many of these same reliability needs, while tailoring the applicability of individual requirements to the characteristics and risks observed within the MISO footprint. As described more fully below, MISO applies foundational data, modeling, telemetry, forecasting, and audit requirements to all Large Loads, while applying additional PMU, ride-through, and ramp requirements specifically to Computational Loads.

---

[7] Proposed Computational Load ROP Revisions, NERC, https://www.nerc.com/who-we-are/rules-of-procedure/proposed-changes-to-rules-of-procedure (last visited Aug. 27, 2026). *See also*, Project 2026-02 Computational Loads, NERC, https://www.nerc.com/standards/reliability-standards-under-development/2026-02-computational-loads (last visited Aug. 27, 2026).

[8] The Commission approved SPP's proposal on January 14, 2026. *See Southwest Power Pool, Inc.*, 194 FERC ¶ 61,031 (Jan. 14, 2026).

Q. PLEASE DESCRIBE THE RELIABILITY NEEDS DRIVING THIS FILING.

A. MISO is experiencing increasing levels of Large Load development being evaluated through transmission planning, Expedited Project Review ("EPR"), and other interconnection-related processes. Existing MISO planning and operational processes provide a strong foundation for evaluating reliability impacts; however, the increasing size, concentration, and changing characteristics of Large Loads create a need for greater consistency in the information, visibility, and performance expectation necessary to reliably plan and operate the Transmission System.

Accordingly, MISO proposes a reliability-based framework for Large Loads that complements existing MISO planning, interconnection, and operational processes. The framework is intended to improve visibility into Large Load characteristics and behavior, support accurate representation of these facilities in planning and operational analyses, and establish scalable and technically justified requirements that reflect demonstrated reliability risks.

Q. HAS MISO TAKEN ANY STEPS TO ADDRESS LARGE LOAD INTEGRATION IN THE PAST?

A. Yes. In recent years, MISO established the Expedited Resource Addition Study ("ERAS") as a targeted, temporary process to issue a Generator Interconnection Agreement in three months. MISO has also improved its Transmission Expansion Plan's EPR process to quickly approve transmission upgrades necessary to address urgent needs associated with the addition of large loads. As discussed further below, MISO's large load initiatives are designed to support reliability at interconnection, speed to reliable power, and reliable system operations as large load additions continue to accelerate across the footprint.

Q. PLEASE EXPLAIN WHY THESE EXISTING EFFORTS ARE INSUFFICIENT.

A. While these initiatives provide important benefits, they do not fully address the reliability and operational challenges associated with accelerating large load growth. Existing planning reforms primarily focus on generation additions and transmission development timelines. Likewise, broader reliability initiatives were not specifically designed to address the unique characteristics and operational challenges presented by large load and computational load additions. Accordingly, additional Tariff-based solutions are necessary to establish clear reliability expectations, improve operational visibility, and facilitate timely integration of large loads in a manner that is both reliable and non-discriminatory.

Q. HOW IS MISO PROPOSING TO ACCELERATE THE RELIABLE INTEGRATION OF LARGE LOADS IN THE MISO REGION?

A. MISO is proposing to implement a reliability-based framework to support the interconnection and ongoing operational challenges of Large Loads within the MISO region. The objective is to establish scalable, technically justified, and risk-informed expectations that improve visibility into large load behavior, support planning and operational readiness, and preserve reliable operation of the Transmission System and Bulk Electric System. The proposed framework is intended to complement existing MISO planning, interconnection, and operational processes and align, to the extent practical, with emerging NERC guidance and industry practices.

IV. MISO'S LARGE LOAD INTERCONNECTION RELIABILITY REQUIREMENTS PROPOSAL

Q. PLEASE PROVIDE AN OVERVIEW OF MISO'S PROPOSED RELIABILITY REQUIREMENTS FOR LARGE LOADS.

A. MISO's IRR proposal establishes a reliability framework surrounding Large Load interconnection that is focused on visibility of Large Loads and management of the ongoing operational impacts Large Loads present. In addition to the specific reliability requirements codified in the Tariff, the IRR proposal also provides key transition provisions related to the application of specific requirements that seek to minimize disruption to existing commercial arrangements for Large Loads, including those commercial arrangements that were nearing completion at the time of this filing. The distinct categories of requirements are:

1. **Visibility Requirements - Data, Modeling, Telemetry, and Forecasting Requirements:** These requirements establish expectations for facility information, electrical models, real-time telemetry, monitoring, short-term and forecasting, and other operational visibility requirements necessary to support planning studies, operational assessments, and accurate representation of Large Load behavior and system impacts.

2 **Phasor Measurement Unit (PMU) Requirements:** In addition to the broader visibility requirements above, the PMU requirements establish enhanced monitoring expectations for Computation Loads through high-resolution, time-synchronized measurements. PMU data provides MISO with greater visibility into facility behavior during system disturbances and rapid operating changes,

supporting model validation, performance verification, disturbance analysis, and identification of potential dynamic interactions with the Transmission System.

3. **Ramp Requirements:** These requirements address the rate at which Computational Loads may increase or decrease consumption during stable-state transitions. Managing rapid changes in demand helps reduce real-time supply-demand imbalances, sudden change in transmission power flows, and associated operational impacts, while supporting more reliable system operation. Ramp-rate limits do not apply during fault or disturbance conditions when necessary for equipment protection or to satisfy ride-through performance requirements.

4. **Ride-Through Requirements:** These requirements establish minimum disturbance performance expectations during voltage and frequency disturbances to reduce the risk of unnecessary disconnection or customer-initiated rapid reductions in Demand during credible system events.

MISO recognizes that the Commission also included a study process that evaluates and manages the unique reliability and operational challenges Large Loads create when receiving Transmission Service in its discussion of ongoing operational requirements in the Show Cause Order. The IRR proposal addresses requirements applicable to Large Load facilities themselves. MISO evaluates and manages unique reliability and operational challenges through studies, including a stability assessment, as part of its MTEP and EPR processes. MISO intends to address enhancements to stability assessment study processes in a future Federal Power Act Section 205 filing. Those future study processes will focus on identifying system-level reliability impacts associated with load additions and

determining whether transmission or other system-level solutions are necessary, as part of a broader set of load addition and transmission service study requirements.

A. DEFINITIONS

Q. PLEASE IDENTIFY THE NEW DEFINITIONS MISO PROPOSES TO IMPLEMENT THROUGH THIS FILING.

A. The following definitions are provided to support consistent interpretation of the reliability framework described in this filing:

- **Computational Load:** Large Load comprised of 25 MW or more of Demand from information technology equipment, such as servers, storage, and networking hardware.
- **Large Load:** Load with Demand of 50 MW or more associated with any facility or aggregation of facilities located at a single substation behind one or more Point(s) of Withdrawal from the Transmission System that is owned, operated, or controlled by: (a) a single entity or (b) a group of entities that will coordinate with respect to the profile of the Load. Large Load does not include Load used exclusively for charging an Electric Storage Resource.
- **Large Load Equipment:** Any of the facilities, devices, or equipment that constitutes a part of a Large Load, or are used to interconnect the Large Loads to the Transmission System.
- **Point(s) of Withdrawal:** The point where a non-transmission facility used to withdraw Energy from the Transmission System to serve Load connects to the Transmission System.

Q. HOW DID MISO ARRIVE AT THE PROPOSED DEFINITION OF LARGE LOAD?

A. MISO developed the proposed Large Load definition through review of emerging industry practices, consideration of the reliability needs within the MISO region, and stakeholder feedback. MISO reviewed approaches being developed or used by NERC and other RTOs, including PJM, SPP, and ERCOT. While those approaches vary, they generally recognize that sufficiently large, concentrated load additions warrant additional visibility and reliability consideration.

Based on that review, MISO selected a 50 MW threshold as a reasonable and administratively clear starting point, consistent with industry precedent and sufficiently significant to warrant application of MISO's Large Load requirements. The definition is based on gross load rather than net load so that MISO has visibility into the full electrical demand and characteristics of the facility.

Finally, MISO also defined Large Load at the facility or site level rather than solely at an individual point of interconnection. This allows loads under common ownership or coordinated operational control at a single site to be considered together, including where the site is served through multiple points of interconnection.

Q. WHY IS 50 MW A REASONABLE THRESHOLD FOR LARGE LOAD IN THE MISO REGION?

A. MISO determined that 50 MW is a reasonable threshold based on industry precedent, including from PJM and SPP, and the need for a clear and administratively workable means of identifying significant, concentrated loads that warrant additional reliability visibility.

A load of this magnitude is sufficiently large that its characteristics and behavior can be relevant to transmission planning and system operations.

Importantly, the 50 MW threshold serves as an applicability threshold; it does not mean that every Large Load at or above 50 MW presents the same reliability risk. MISO's proposed requirements recognize differences in facility characteristics by establishing baseline visibility requirements for Large Loads while applying certain additional performance requirements to Computational Loads where their operating characteristics warrant additional consideration. This approach provides a clear threshold while allowing the requirements to remain proportional to the reliability needs being addressed.

Q. WHY DOES MISO DEFINE "COMPUTATIONAL LOAD"?

A. MISO defines Computational Load to distinguish a subset of Large Loads that may exhibit operational characteristics different from more traditional loads, including rapid changes in demand, highly coordinated control behavior, and power-electronic responses during system disturbances. This distinction allows MISO to apply certain incremental requirements—such as ramp, PMU, and ride-through requirements—only where those characteristics warrant additional reliability consideration. Defining Computational Load therefore supports a more targeted and risk-informed approach, rather than applying the same requirements to all Large Loads regardless of facility type or operating behavior.

Q. WHY IS A DEFINITION OF COMPUTATIONAL LOAD NECESSARY FOR THIS FILING?

A. A definition of Computational Load is necessary because certain proposed requirements are intended to apply only to Large Loads with operating characteristics that warrant additional reliability consideration. Computational Loads may exhibit rapid and

coordinated changes in demand, significant power-electronic behavior, and distinct responses to Transmission System disturbances. Defining this subset allows MISO to apply incremental requirements—such as ramp, PMU, and ride-through requirements—in a targeted manner rather than applying them to all Large Loads. As noted above, this supports a scalable and risk-informed approach in which requirements are aligned with the characteristics and reliability risks they are intended to address.

Q. HOW DOES MISO'S PROPOSED DEFINITION OF COMPUTATIONAL LOAD ALIGN WITH NERC'S PROPOSED DEFINITION?

A. MISO's proposed definition of Computational Load is closely aligned with NERC's developing definition of computational load. Both approaches identify computational load based on electric demand associated with information technology equipment, such as servers, storage, and networking hardware. This common approach focuses on the underlying electrical equipment and characteristics of the load rather than on a particular industry or customer type.

MISO has tailored the applicability of its requirements to the needs of the MISO Transmission System, while NERC is separately developing registration criteria and Reliability Standards to determine which Computational Load Owners and Operators will be subject to mandatory NERC requirements. Accordingly, differences in applicable thresholds or scope do not represent a fundamental difference in the definition of Computational Load; rather, they reflect the different purposes and responsibilities of MISO and NERC.

MISO will continue to monitor NERC's ongoing standards development and seek alignment as those requirements are finalized.

B. SCOPE AND APPLICABILITY

Q. PLEASE DESCRIBE THE SCOPE OF THIS FILING.

A. This filing proposes reliability requirements and a reliability-based framework applicable to Transmission Customers taking Transmission Service on behalf of Large Load interconnected to the MISO Transmission System. These requirements are needed to allow MISO to plan for and ensure the reliable operations of Large Loads that may materially affect the Transmission System or Bulk Electric System due to their size, operating behavior, electrical characteristics, or dynamic performance. The filing includes the following principal requirements:

- **Definitions and Applicability:** Establishes which facilities qualify as Large Loads and Computational Loads and identifies when the requirements apply.
- **Data Requirements:** Establishes the facility and operational information MISO needs to understand Large Load characteristics and expected behavior.
- **Model Requirements:** Requires appropriate electrical models so Large Loads can be accurately represented in MISO planning and operational analyses.
- **Telemetry Requirements:** Provides real-time visibility into Large Load demand and operating conditions to support reliable system operations.
- **Forecasting Requirements:** Establishes short-term and other forecast information needed to anticipate Large Load demand and operating changes.
- **PMU Requirements for Computational Loads:** Provides high-resolution, time-synchronized measurements to support disturbance analysis, model validation, and performance verification.

- **Ramp Requirements for Computational Loads:** Establishes limits on rapid increases or decreases in demand during stable-state transitions to help manage operational impacts.
- **Ride-Through Requirements for Computational Loads:** Establishes minimum voltage and frequency disturbance-performance expectations to reduce unnecessary disconnection and sudden load loss.
- **Implementation and Transitional Provisions:** Establishes compliance timing, responsibilities, and transition mechanisms for existing and developing facilities.

Taken together, these provisions address reliability needs at the facility and information levels by establishing clearer expectations for how Large Loads are represented, monitored, forecasted, and expected to perform. MISO intends to address additional enhancements to its study processes in a subsequent filing, including analyses used to identify broader system-level reliability impacts and, where necessary, appropriate system-level solutions.

Q. DOES THE IRR FILING PROPOSE NEW TRANSMISSION PRODUCTS?

A. No. This IRR proposal focuses specifically on reliability requirements applicable to Large Loads in the MISO region. MISO will address new transmission products in a separate Federal Power Act Section 205 filing.

Q. TO WHOM WILL THE PROPOSED REQUIREMENTS APPLY?

A. The proposed requirements in this filing apply to the Large Load as set forth in the Tariff and the Business Practices Manual for Large Load, and as discussed further below.

Subject to the transition provisions discussed below, all Large Loads will be subject to the applicable visibility requirements including: Basic Facility Data, Modeling, Telemetry, Forecast Data, and Audit requirements. In addition, the Computational Load component

of a Large Load, as defined in the Tariff, is additionally subject to the Phasor Measurement Unit, Ride-Through, and Ramp requirements.

As previously discussed, MISO recognizes that not all Large Loads present the same reliability risks. Accordingly, MISO has limited the application of PMU, Ramp and Ride-Through requirements to the Computational Load component of a Large Load, which reflects the increased operational risk Computational Loads place on the Transmission System. As previously stated, the IRR proposal is intended to provide a scalable and risk-informed framework that may be applied in a manner proportional to demonstrated reliability need, system conditions, and facility characteristics.

Q. WHICH ENTITIES ARE RESPONSIBLE FOR COMPLIANCE WITH THE REQUIREMENTS PROPOSED IN THIS FILING?

A. The IRR proposal establishes that the Transmission Customer taking Transmission Service on behalf of a Large Load is responsible for ensuring compliance with each of the applicable requirements set forth in the new Tariff section 37A. The term "Transmission Customer" is currently defined in the MISO Tariff as: "Any Eligible Customer (or its Designated Agent) that (i) executes a Service Agreement, or (ii) requests in writing that the Transmission Provider file with the Commission, a proposed unexecuted Service Agreement to receive Transmission Service under Module B of this Tariff." This term is used in the Module A, Common Tariff Provisions, to include customers receiving Transmission Service under Module B of this Tariff, including any customer receiving HVDC Service.

Q. WHY IS IT JUST AND REASONABLE TO APPLY THE INTERCONNECTION RELIABILITY REQUIREMENTS TO A TRANSMISSION CUSTOMER TAKING TRANSMISSION SERVICE ON BEHALF OF A LARGE LOAD?

A. Requiring the Transmission Customer to prove compliance with the requirements established in the IRR proposal is consistent with the Show Cause Order's discussion of imposing requirements on an "Eligible Customer" and recognizes that the ultimate owner of a Large Load may not participate directly in MISO's markets or otherwise have contractual privity to MISO. All Large Loads interconnected to the Transmission System, however, will be required to procure Transmission Service through a Transmission Customer pursuant to the Tariff. As a result, the Transmission Customer will be required to enter into a transmission service agreement, which incorporates by reference, the terms of the Tariff, including the requirements proposed herein. As such, applying the requirements established in the IRR proposal to a Transmission Customer taking Transmission Service on behalf of a Large Load establishes a legally enforceable framework though which all reliability requirements imposed on a Large Load may be enforced.

C. TRANSITION PROVISIONS

Q. HOW DOES THE IRR FILING RECOGNIZE EXISTING COMMERCIAL ARRANGEMENTS, AND COMMERCIAL ARRANGEMENTS NEAR COMPLETION, AS CONTEMPLATED BY THE SHOW CAUSE ORDER?

A. The IRR Filing includes transition provisions that are intended to provide certainty to existing commercial arrangements and commercial arrangements that were near completion at the time of this filing. The requirements, which I discuss further below,

consider the Service Commencement Date of the Transmission Service to serve a Large Load, whether transmission projects or upgrades associated with the Large Load have been approved by the MISO Board in MTEP 2026, or a prior MTEP, and when transmission projects or upgrades associated with the Large Load has been submitted to the MISO EPR process. The "Service Commencement Date" is the date MISO or an Independent Transmission Company ("ITC") begins to provide service pursuant to the terms of an executed Service Agreement, or the date MISO or an ITC begins to provide Transmission Service under the MISO Tariff.

Q. WHAT IS THE MTEP / EPR CONDITION?

A. For purposes of the transition provisions, Load will satisfy the "MTEP/EPR Condition" if it is associated with a transmission project that either: (a) has been approved by the MISO Board in MTEP 2026, or a prior MTEP; or, (b) has been submitted to MISO for EPR on or prior to June 18, 2026, in accordance with Attachment FF of the Tariff.

Q. WHAT IS THE SIGNIFICANCE OF LINKING APPROVAL OF TRANSMISSION PROJECTS FOR LARGE LOAD INTERCONNECTIONS TO MTEP 2026, OR A PRIOR MTEP?

A. Under current processes, MISO does not have a Load interconnection process. As such, specific Load additions are not submitted to MISO for individual study in MISO's planning processes; however, the need for transmission upgrades or related projects to support a new Load can be identified through MISO's MTEP or EPR processes. Linking the transition provisions discussed below to approvals received in MTEP 2026, or prior, recognizes the existing commercial arrangements and more immediate, non-speculative, nature of the Load additions and associated Transmission System upgrades.

Q. WHY DO THE PROPOSED TRANSITION PROVISIONS ALLOW FOR SUBMISSIONS OF LOAD OR TRANSMISSION UPGRADES THROUGH EPR ON OR BEFORE JUNE 18, 2026?

A. The June 18, 2026, date coincides with the Commission's issuance of the Show Cause Order and establishes a date on which all parties were on notice that significant changes to MISO's Tariff, and requirements for Large Loads in particular, should be expected in the near future. In addition, application of this date in the terms of the transition provision recognizes projects that had been previously submitted to MISO for study in the EPR process on, or prior to, the date of the Show Cause Order without opening a window during which parties could submit speculative EPR or MTEP projects.

Q. PLEASE DESCRIBE THE TRANSITION PROVISIONS PROPOSED IN THIS FILING.

A. MISO proposes to implement the following transition provisions:

First, MISO proposes to fully exempt, or "grandfather," any Large Load that has a Service Commencement Date on or prior to December 4, 2026, from all requirements of the proposed Section 37A, with respect to the portion of the Large Load that has procured Transmission Service as of the Service Commencement Date. Any modification or series of modifications to a Load that meets the MTEP/EPR Condition, which results in a cumulative increase of 25 MW or more in Transmission Service for such Load and with a Service Commencement Date after December 4, 2026, may subject the additional Load to certain requirements, depending on MTEP / EPR approval date and the Service Commencement Date of the Transmission Service for the additional Load.

Second, MISO proposes that a Large Load, or a portion of a Large Load, that does not have a Service Commencement Date prior to December 4, 2026, but that meets the MTEP/EPR Condition shall be subject to the visibility requirements set forth in Sections 37A.1 through 37A.5 and Section 37A.8, and shall be exempt from the ramp and ride-through requirements set forth in Sections 37A.6 through 37A.7.

Third, MISO proposes that a Large Load, or a portion of Large Load, that does not have a Service Commencement Date prior to December 4, 2026, and that has not met the MTEP/EPR Condition, but has submitted Load associated with a transmission project to the Transmission Provider for EPR on or after June 19, 2026, but on or before October 31, 2026, shall be subject to all requirements set forth in this Section 37A, provided that Transmission Provider may waive the ride-through requirements set forth in Section 37A.6 based upon a determination that: a) exemption from such requirements would not have an adverse reliability impact; and, b) compliance with such requirements would result in significant costs.

Q. WHY DOES MISO PROVIDE A POTENTIAL EXEMPTION FROM RIDE-THROUGH REQUIREMENTS FOR PROJECTS SUBMITTED BETWEEN JUNE 19, 2026, AND OCTOBER 31, 2026?

A. MISO provides a potential exemption from the ride-through requirements for certain projects submitted between June 19, 2026, and October 31, 2026, to provide a reasonable transition for projects that were nearing completion at the time of this filing.

The June 19, 2026, date immediately follows the Commission's June 18, 2026 Show Cause Order, which recognized that Large Loads were at different stages of development and directed that prospective reforms minimize disruption to existing commercial

arrangements and provide reasonable time for arrangements nearing completion. The October 31, 2026, cutoff date establishes a finite transition period, after which prospective projects are expected to account for MISO's ride-through requirements as part of their development and design.

Importantly, the provision does not provide an automatic exemption from ride-through requirements. Rather, it provides a pathway for eligible projects to demonstrate, through the applicable reliability assessment, that operation without full ride-through capability would not result in an adverse reliability impact. Where such a determination cannot be made, appropriate ride-through capability or mitigation would still be required.

This approach balances the need to recognize projects that may have made material design, procurement, or commercial commitments before the new requirements were fully established with MISO's responsibility to maintain reliable operation of the Transmission System.

Q. ARE LARGE LOADS THAT DO NOT MEET THE MTEP/EPR CONDITION EXEMPT?

A. No. A Large Load, or a portion of a Large Load, that does not meet the MTEP/EPR Condition shall be subject to all applicable requirements set forth in proposed Section 37A.

Q. HOW DID MISO DEVELOP THESE TRANSITION PROVISIONS?

A. MISO developed the transition provisions through a deliberate process that considered both identified reliability needs and practical implementation considerations for Large Loads at different stages of development. MISO evaluated the reliability objectives of the proposed requirements, presented and discussed potential transition approaches through the MISO stakeholder process, and considered stakeholder feedback regarding project status,

implementation readiness, and the potential economic and other impacts of applying new requirements to existing and late-stage projects. Based on that process, MISO refined the transition framework to provide appropriate treatment for existing and previously approved projects while applying the new requirements prospectively and preserving MISO's ability to address demonstrated material adverse impacts to Transmission System reliability.

D. LARGE LOAD RELIABILITY REQUIREMENTS

Q. PLEASE SUMMARIZE THE PROPOSED RELIABILITY REQUIREMENTS.

A. The proposed framework consists of the following categories of reliability requirements intended to address planning, operational, disturbance performance, and system stability considerations associated with Large Loads:

Requirement Category	General Applicability
Data, Modeling, Telemetry, and Forecasting, Requirements	Generally applicable to all Large Loads to provide MISO with the information, models, operational visibility, and forecasts necessary to support transmission planning and reliable system operations.
Phasor Measurement Unit (PMU) Requirements	Applicable to Computational Loads to provide high-resolution, time-synchronized measurement capability supporting monitoring, model validation, post-event analysis, and reliability assessment.
Ramp Requirements	Applicable to Computational Loads. Ramp limits address up- and down-ramp behavior during stable-state transitions and are measured in aggregate across the applicable Point(s) of Withdrawal.
Ride-Through Requirements	Applicable to Computational Loads. Computational Loads must remain connected and continue operation during voltage and frequency disturbances within the performance criteria established by MISO.

The applicability of individual requirements, implementation details, exemptions, and compliance approaches are discussed below.

1. Basic Facility Data and Modeling

Q. PLEASE DESCRIBE THE RELIABILITY OBJECTIVE FOR THE PROPOSED DATA AND MODELING REQUIREMENTS.

A. The objective of the proposed data and modeling requirements is to ensure sufficient visibility into the characteristics, operating behavior, and electrical performance of Large Loads necessary to support reliable planning, interconnection, commissioning, operations, and post-event analysis. As emerging Large Loads increasingly exhibit dynamic operating characteristics and concentrated demand, and utilize sophisticated power-electronic equipment and controls, additional facility information, telemetry, and modeling detail may be necessary to evaluate reliability impacts under both normal and contingency conditions. Data and modeling requirements are intended to support reliable operation of the Transmission System by improving the accuracy of planning assumptions, strengthening operational awareness, supporting disturbance analysis and model validation, and enabling more consistent evaluation of system performance associated with Large Load integration. These requirements provide a framework for obtaining facility information, electrical models, telemetry, monitoring data, and operational visibility necessary to support planning studies, operational assessments, commissioning activities, and reliability evaluations.

Q. PLEASE DESCRIBE THE PROPOSED DATA REQUIREMENTS.

A. The proposed data requirements are intended to ensure that MISO has sufficient information to understand the configuration and electrical characteristics of each Large Load. Transmission Customers must provide basic facility information, one-line diagrams,

and information describing the electrical characteristics of the Large Load and associated Large Load Equipment.

The requirements also establish an ongoing obligation to provide timely updates when the characteristics of the Large Load change. Those updates may include changes in Load MW amounts, firm and non-firm demand, dispatchable Load, power factor, metering, telemetry, breaker configuration, staged load additions, and annual energy. The Transmission Customer must also coordinate with the applicable Transmission Owner in accordance with MISO's load interconnection guidance and applicable NERC standards.

Together, these requirements help ensure that MISO has current and accurate facility information to support planning and reliable operation of the Transmission System.

Q. PLEASE DESCRIBE THE PROPOSED MODELING REQUIREMENTS.

A. The proposed modeling requirements are intended to ensure that MISO has accurate and sufficiently detailed representations of Large Loads for transmission planning and reliability analysis. Transmission Customers must provide verified electrical models and detailed load profiles with enough information for MISO to evaluate system performance under normal and contingency conditions.

Before service begins, the Transmission Customer must submit final verified models reflecting the facility's as-built configuration and actual operating characteristics. The models must also be maintained and updated over time, and material modifications must be submitted to MISO for study and approval before implementation.

Together, these requirements help ensure that MISO's planning and reliability studies are based on current and representative Large Load models.

2. Load Forecasting Requirements

Q. PLEASE DESCRIBE THE RELIABILITY OBJECTIVE FOR THE PROPOSED LOAD FORECASTING REQUIREMENTS.

A. Large Loads can change system conditions rapidly, and unlike traditional demand, their behavior cannot be forecasted accurately using historical load patterns, even when modeled with weather and calendar data in MISO's short-term forecasting system.

Q. PLEASE DESCRIBE THE PROPOSED LOAD FORECASTING REQUIREMENTS.

A. The proposed short and medium-term forecasting requirements are intended to provide MISO with timely and accurate visibility of expected Large Load demand. Transmission Customers must provide Day-Ahead and Real-Time Load Forecasts directly to MISO to support the Reliability Assessment Commitment, Security Constrained Economic Dispatch, and other reliability studies. The forecasts must be updated to reflect the most current information regarding expected demand.

MISO also provided an extended implementation period for these requirements. Compliance is required by the latter of the Large Load's Service Commencement Date or September 1, 2027, providing Transmission Customers with additional time to establish the forecasting capabilities, data processes, and related procedures necessary to provide reliable day-ahead and real-time Load Forecasts to MISO.

3. Telemetry and PMU Requirements

Q. PLEASE DESCRIBE THE RELIABILITY OBJECTIVE FOR THE PROPOSED TELEMETRY AND PHASOR MEASUREMENT UNIT REQUIREMENTS.

A. The objective of the proposed Telemetry and PMU requirements is to provide MISO with the real-time visibility and high-resolution measurement capabilities necessary to reliably integrate Large Loads. Continuous, high-resolution visibility into the behavior of Large Loads is needed because the size, rapid changes in consumption, and dynamic behavior of Large Loads can create or exacerbate reliability risks.

Telemetry provides the foundational real-time visibility into Large Load operation. The proposed Telemetry requirements apply to all applicable Large Loads and provide MISO and Transmission Owners with real-time information regarding Large Load electrical conditions and operating behavior through SCADA/ICCP data. This information supports real-time monitoring, balancing of supply and demand, contingency analysis, and identification of abnormal operating conditions.

For Computational Loads, the proposed PMU requirements provide additional high-resolution, time-synchronized measurements needed to monitor and verify dynamic performance that may not be adequately captured by conventional telemetry. Computational Loads can exhibit rapid changes in real and reactive power and can respond rapidly to voltage and frequency disturbances, including through partial reductions in consumption or disconnection. PMUs, or comparable high-resolution measurements, enable MISO to: monitor and verify disturbance performance, including ride-through and active-power recovery behavior; characterize rapid changes in consumption and oscillatory behavior; validate and refine models used in reliability studies; and, support post-event analysis.

The PMU requirements therefore complement, rather than duplicate, conventional telemetry by providing the measurement resolution necessary to observe and evaluate the

fast dynamic behavior of Computational Loads. Figure 1 illustrates the difference in measurement resolution between conventional SCADA telemetry and PMU data.

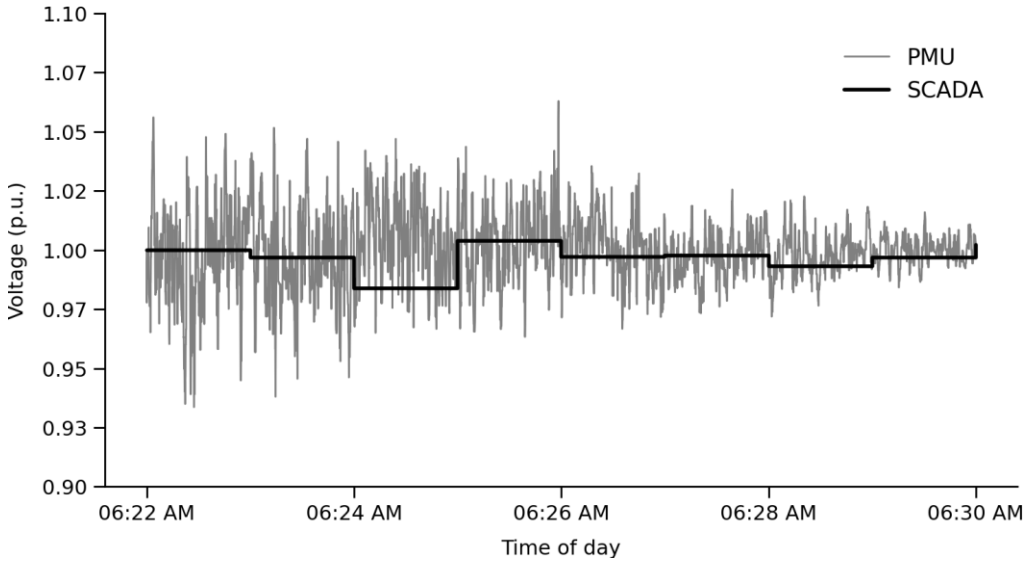


Figure 1: Differences between SCADA and PMU

Q. PLEASE DESCRIBE THE PROPOSED TELEMETRY REQUIREMENTS.

A. The telemetry requirements are intended to provide MISO with reliable, real-time visibility into Large Load operations. The Transmission Customer must provide real-time telemetry through an approved communication path using Inter-Control Center Communications Protocol ("ICCP"), maintain commercially reasonable levels of data availability and accuracy, and promptly correct data or modeling issues. This also requires individual metering for Large Loads and, where applicable, generation located behind the same Point of Withdrawal so that MISO can accurately distinguish and assess the relevant load and related generation behavior.

MISO also provides an extended implementation period for these requirements. Compliance is required by the latter of the Large Load's Service Commencement Date or September 1, 2027, providing Transmission Customers and Transmission Owners

additional time to establish the necessary metering, ICCP communications, data mappings, and related processes needed to provide reliable and accurate telemetry to MISO.

Q. DOES THE PROPOSAL IDENTIFY SPECIFIC PHASOR MEASUREMENT REQUIREMENTS FOR COMPUTATIONAL LOADS?

A. Yes. The PMU requirements apply specifically to Computational Loads and are intended to provide MISO with high-resolution, time-synchronized visibility into their electrical behavior to support disturbance analysis, model validation, performance verification, and broader reliability assessments. Prior to the applicable Service Commencement Date, phasor measurement recording and communications equipment must be installed on the Transmission Owner's side of the Point of Withdrawal and become part of the Transmission Owner's interconnection facilities.

The proposal also provides flexibility regarding the equipment used to satisfy the requirement. Existing or newly installed equipment, such as protective relays or digital fault recorders, may be used in place of a stand-alone PMU where they provide equivalent measurement quality, resolution, and time synchronization.

Q. DOES THE PROPOSAL PROVIDE GUIDANCE REGARDING THE INSTALLATION OF PHASOR MEASUREMENT CAPABILITY FOR A LARGE LOAD?

A. Yes. For Computational Loads subject to the phasor measurement requirements, the proposal provides guidance regarding both the location of the measurement capability and the entity responsible for its installation.

The phasor measurement capability is generally required on the Transmission Owner's side of the Point of Withdrawal so that MISO can obtain high-resolution, time-synchronized

measurements of the facility's interaction with the Transmission System. The proposal also provides flexibility in how this capability is provided. Existing or newly installed equipment, including protective relays or other recording devices, may be used where they provide measurement capability equivalent to a dedicated PMU.

The responsibility for installing and maintaining this capability is assigned to the Transmission Owner, at the expense of the Transmission Customer. This differs from requirements for data, models, forecasts, and other facility information, which rely on information within the knowledge or control of the Transmission Customer. The phasor measurement requirement involves physical monitoring capability located on transmission-side facilities that are owned and maintained by the Transmission Owner. Assigning this responsibility to the Transmission Owner therefore aligns the obligation with the entity that controls the facilities necessary to install, maintain, and integrate the measurement equipment with the applicable communications and monitoring infrastructure.

4. <u>Ramp Requirements</u>

Q. PLEASE DESCRIBE THE RELIABILITY OBJECTIVE FOR THE PROPOSED RAMP REQUIREMENTS.

A. The reliability objective of ramp requirements is to manage the operational impacts that can result when a Computational Load increases or decreases its demand rapidly during stable-state transitions.

Computational Loads may have the capability to change significant amounts of demand over a relatively short period of time and, in some cases, to do so in a highly coordinated manner. Rapid changes of this magnitude can create short-term supply-demand

imbalances, cause sudden changes in transmission power flows, and increase the operational actions needed to maintain reliable system conditions.

Establishing reasonable limits on the rate at which a Computational Load may increase or decrease its demand provides an established operating envelope within which the Transmission Provider can maintain generation-load balance and ensure the coincident risk of multiple Computational Loads does not result in broader reliability impacts.

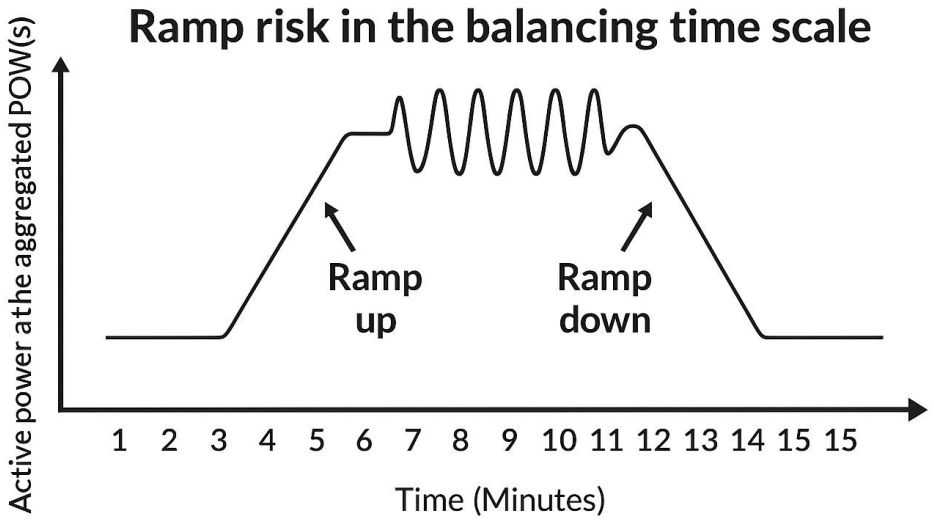


Figure 2: Ramp Rate Risk Profile

Q. PLEASE DESCRIBE THE PROPOSED RAMP REQUIREMENTS.

A. The proposed ramp requirements are intended to ensure that changes in Computational Load demand occur at a rate that can be reliably accommodated by the Transmission System. The requirements establish up- and down-ramp limits during stable-state transitions, measured in aggregate across the applicable Points of Withdrawal, while allowing eligible generation or other resources to provide ramp smoothing.

5. Ride-Through Requirements

Q. PLEASE DESCRIBE THE RELIABILITY OBJECTIVE FOR THE PROPOSED RIDE-THROUGH REQUIREMENTS.

A. The proposed ride-through requirements reduce the risk of unnecessary Computational Load disconnection or rapid changes in Demand during voltage and frequency disturbances and to support predictable disturbance performance during credible Transmission System events. Computational Loads may include fast-acting power-electronic equipment and controls with dynamic operating behavior, and their response to Transmission System disturbances may materially affect system performance, operational reliability, and post-contingency recovery. Establishing minimum ride-through performance expectations is therefore intended to reduce the risk of significant or simultaneous changes in Demand and support overall system stability and post-disturbance recovery.

Consistent with emerging industry practices and NERC guidance, the proposed ride-through requirements address three fundamental aspects of Computational Load performance: continued connection and stable operation during disturbances within the applicable ride-through criteria, appropriate active power response while riding through voltage and frequency disturbances, and active power recovery following disturbance clearance. The technical basis and detailed performance criteria supporting these requirements are described in MISO's published Large Load Technical Compendium.[9]

[9] *See* MISO's Interconnection Reliability Requirements for Large Load Technical Compendium, August 2026; available at: https://cdn.misoenergy.org/20260827%20LLWG%20Item%2002c%20MISO%20Large%20Load%20Interconnection%20Reliability%20Requirements_Technical%20Compendium777982.pdf.

Q. PLEASE DESCRIBE THE GENERAL PRINCIPLES UNDERLYING THE PROPOSED RIDE-THROUGH REQUIREMENTS.

A. The proposed ride-through requirements apply at the applicable Point(s) of Withdrawal and establish the voltage and frequency conditions under which Computational Loads are required to remain connected to the Transmission System and continue operation. When system conditions remain within the applicable ride-through criteria, Computational Loads are required to remain connected without unnecessary disconnection.

The requirements further establish expectations for Computational Load performance while riding through disturbances and following disturbance recovery. During voltage disturbances, the appropriate active power response may vary depending on the severity of the disturbance, with greater flexibility in active power response during more severe voltage depressions to support continued connection and stable operation. Following disturbance clearance, active power is expected to recover in a controlled and predictable manner consistent with Transmission System reliability needs. During frequency disturbances, Computational Loads are expected to maintain predictable active power consumption while riding through the disturbance in accordance with the applicable performance requirements.

The proposed Tariff establishes the core ride-through obligation, while the technical basis and detailed performance criteria supporting MISO's proposal are described in MISO's published Large Load Technical Compendium. Detailed implementation, evaluation, and compliance requirements will be established through MISO's applicable Business Practices and address the following:

- Applicability: Applies to Computational Loads subject to MISO's ride-through requirements.
- Stay connected: Requires the facility to remain connected during qualifying voltage and frequency disturbances.
- Stable operation: Requires the facility to maintain stable behavior during the disturbance and avoid unnecessary tripping.
- Post-disturbance recovery: Requires active power to recover in a controlled manner that supports reliable Transmission System operation.
- Demonstration of capability: Requires the Transmission Customer to provide models, studies, equipment information, testing, or other evidence demonstrating compliance.

Additional detail can be found in the Large Load Technical Compendium.

V. STAKEHOLDER ENGAGEMENT AND EFFECTIVE DATE

Q. PLEASE DESCRIBE HOW THE STAKEHOLDER PROCESS INFORMED MISO'S IRR PROPOSAL.

A. MISO has engaged in detailed discussions with stakeholders on Large Load issues since 2024 in various stakeholder entities and workshops. MISO first discussed Large Loads with stakeholders in the context of EPR process improvements at the Planning Advisory Committee ("PAC") and Planning Subcommittee ("PSC") in 2024 and 2025. Moreover, since 2024, MISO has discussed coordinating the MTEP and Definitive Planning Phases ("DPP") processes to accommodate Large Loads at the PSC. MISO additionally discussed Large Load citing methodology at the November 18, 2025, Futures Redesign Workshop. MISO introduced the Large Load Interconnection Reliability Requirements at the Large Loads Workshop on January 30, 2026. The workshop addressed the challenges associated

with reliably interconnecting large loads, focusing on defining reliability requirements and improving the speed of integration while maintaining reliability to support member plans and goals. Following the January 30th workshop, MISO discussed the Large Load Interconnection Reliability Requirements at the PAC and the Large Load Working Group ("LLWG").[10]

At the February 25, 2026, PAC, MISO proposed a definition of Large Load and provided a high-level overview of the Large Load Interconnection Reliability Requirements. MISO requested stakeholder feedback on the Large Load definition. At the April 20, 2026, LLWG, MISO provided a revised large load definition based on stakeholder feedback and presented the Large Load Interconnection Reliability Requirements. MISO requested feedback on the Large Load Interconnection Reliability Requirements. At the April 22, 2026, PAC, MISO shared the revised Large Load definition that had been shared previously at the LLWG. MISO additionally presented transition provisions it developed to address pending but unbuilt Large Load.

At the May 14, 2026, LLWG, MISO responded to stakeholder feedback from the April 20 LLWG meeting, provided proposed Tariff language for the Large Load Interconnection Reliability Requirements, and provided an updated Large Load definition. In response to stakeholder feedback MISO revised the applicability language to provide additional clarity, included transitional provisions that offer flexibility during implementation, and incorporated a phased-in implementation to support readiness across customers and utilities. MISO additionally updated its Large Load definition based on stakeholder

[10] A table listing the stakeholder meetings, including links to the presentations, is provided as Attachment A hereto.

feedback. Specifically, in response to stakeholder feedback regarding MISO's initial proposal allowing multiple Points of Interconnection ("POI"), MISO proposed only allowing multiple POIs if the ZGIA is located at one of the stations, i.e. Points of Withdrawal of a Large Load Campus. MISO requested feedback on the Large Load Interconnection Reliability Requirements Tariff draft. At the May 27, 2026, PAC, MISO presented the updated Large Load definition, including the revisions to applicability and transitional provisions, to ensure clarity on implementation of Interconnection Reliability Requirements.

At the June 10, 2026, LLWG, MISO responded to stakeholder feedback and presented the Tariff redlines for the Large Load Interconnection Reliability Requirements based on stakeholder feedback. Stakeholder feedback significantly influenced the revised Tariff language, particularly around applicability, transition provisions, and requirement specific language. Namely, MISO: (1) updated Tariff and BPM language to clarify treatment of existing loads, any expansions, and the applicability date; (2) updated the transitional provision to allow more flexibility; (3) updated the Applicability section to distinguish between Computational and Non-Computational Loads, and applied only ramp, PMU, ride-through, and advanced modeling requirements to Computational Loads; (4) updated the Transmission Customer definition to clearly define roles and responsibilities; (5) expanded process detail across several Tariff sections, including applicability screening, pre-MTEP/EPR timing, and transitional provisions for inflight projects; and (6) clarified that Tariff applicability for the ramp, PMU, and ride-through requirements align with NERC's emerging definition of Computational Loads and NERC's Load Modeling Task Force technical discussions. MISO additionally revised the Large Load definition by

removing the Large Load Campus construct in response to stakeholder feedback. In addition, MISO published a technical compendium outlining the technical details of the proposal that will be included in the Business Practice Manual.

At the June 29, 2026, LLWG, MISO reviewed Tariff redlines for the Large Load definition and Large Load Interconnection Reliability Requirements based on stakeholder feedback. Stakeholder feedback significantly influenced the revised Tariff language, specifically around applicability, transition provisions, and requirement specific language. MISO additionally described how its proposed framework is consistent with the Commission's Show Cause Order and noted that the framework is also in line with the emerging NERC guidance and broader industry practices. Furthermore, MISO described how its interconnection framework relies on the Tariff to set requirements and its BPM to guide consistent implementation, noting that it is targeting Large Load BPM development to take place from June to September 2026. MISO requested stakeholder feedback on the Tariff updates.

MISO separately presented on Large Load Telemetry and PMU Requirements, with the purpose of establishing SCADA telemetry requirements for Large Loads, and PMU requirements for Computational Loads to provide situational awareness and support system reliability across the MISO footprint. Specifically, MISO will require real-time SCADA telemetry from large loads via ICCP to support real-time monitoring and analysis, and real-time SCADA telemetry from generation behind same POI as Large Load will also be required for real-time monitoring and optimal market dispatch; generator telemetry shall not be netted with load. Furthermore, MISO will require PMU or similar device at the

Large Load with computational load to support dynamic monitoring in real-time. MISO requested stakeholder feedback on The Large Load Telemetry and PMU Requirements.

MISO also presented on Large Load Operation Forecast Requirements, proposing that Large Loads submit short-term forecasts to reliably manage their variability. In particular, MISO proposed Large Load forecast submission at the CP node level, on hourly and 5-minute cadences aligned with commitment and dispatch and defined forecast error measurement and submission monitoring, noting that it is considering mechanisms to incentivize accurate submissions. MISO highlighted that NERC has called for short-term forecast submissions from Large Loads, that SPP requires them today, and that CAISO has identified the same visibility gap. MISO requested stakeholder feedback on this topic.

At the July 15, 2026, PAC, MISO informed stakeholders that the Steering Committee approved reassignment of the Large Load definition to the LLWG. At the July 16, 2026, LLWG, MISO noted in its liaison report that there is a transition plan to manage active projects, explaining that a key consideration has been ensuring reliability while avoiding disruption to loads at a late stage of development. MISO noted that this consideration is reflected in the Commission's Show Cause Order and that it has received stakeholder feedback indicating that its current proposal does not achieve this directive. Therefore, MISO revised its approach to apply full requirements only to loads that MISO has not yet approved through its planning processes, and to apply visibility requirements to a broader set of large loads.

MISO also discussed the Large Load BPM framework and development, focusing on changes for interconnection and operational reliability requirements. MISO proposed a "hub-and-spoke" BPM framework consisting of a new Large Load BPM, the "hub,"

supported by updates to existing BPMs and manuals, the "spokes." MISO requested stakeholder feedback on the Large Load BPM framework.

At the July 27, 2026, LLWG, MISO reviewed Tariff redlines for the Large Load definition and Large Load Interconnection Reliability Requirements based on stakeholder feedback. MISO noted that its BPM development timeline has been extended to December 2026. MISO also provided updates to its Technical Compendium. MISO requested stakeholder feedback on its Tariff updates.

At the August 12, 2026, LLWG, MISO reviewed the informal stakeholder feedback on the reliability requirement updates provided at the July 27, 2026, LLWG. MISO discussed the additional refinements it made to its proposal based on informal stakeholder feedback.

As described above, throughout the stakeholder engagement period, MSO has solicited feedback from stakeholders and provided written and verbal responses to that feedback. MISO's stakeholder process has contributed to substantive design changes in MISO's filing and the collaborative process with stakeholders resulted in a comprehensive proposal for addressing Large Loads in the MISO footprint. MISO appreciates the willingness of all its stakeholders and state regulators to review and comment on this final proposal, which MISO believes reasonably accommodates concerns raised by stakeholders.

In addition to the stakeholder meetings, MISO's external affairs and large load teams have met with individual stakeholders and RERRAs to inform them about MISO's proposal and answer questions. MISO is aware that this is a pressing topic in the MISO footprint and commits to working with stakeholders and RERRAs to address any questions that may arise.

Q. WHAT EFFECTIVE DATE HAS MISO REQUESTED FOR THE LARGE LOAD INTERCONNECTION REFORM PROPOSAL?

A. MISO has requested a proposed effective date of December 4, 2026. This is the day after which the MISO Board is expected to approve the MTEP 2026 projects and aligns with the IRR transition provisions described above.

VI. CONCLUSION

Q. DOES THIS CONCLUDE YOUR TESTIMONY?

A. Yes.

Affidavit of Beibei Li

COUNTY OF HAMILTON)

)

STATE OF INDIANA)

Beibei Li, being duly sworn, deposes and states that she prepared the Prepared Direct Testimony of Beibei Li, and the statements contained therein are true and correct to the best of her knowledge and belief.

Beibei Li

SUBSCRIBED AND SWORN BEFORE ME, this 26 day of August, 2026.

(Notary Public Signature)

JENNIFER L MILLER
Notary Public, State of Indiana
Boone County
Commission Number NP0697079
My Commission Expires
February 22, 2033

Commissioned in Boone county.

Commission Number: NP0697079

Commission Expires: February 22, 2033

Attachment A – Table of Stakeholder Meetings and Materials

MEETING DATE	MATERIALS
January 30, 2026 Large Load Workshop	Large Load Additions Workshop
February 25, 2026 PAC	Large Load Interconnection Reliability Requirements (PAC-2024-1)
April 20, 2026 LLWG	Large Load Overview New Large Load Issue Submissions Large Load Interconnection Reliability Requirements (LLWG)
April 22, 2026 PAC	PAC April 2026: PAC: Large Load Definition (PAC-2024-1)
May 14, 2026 LLWG	Large Load Interconnection Reliability Requirements (LLWG)
May 27, 2026 PAC	Large Load Definition Update
June 10, 2026 LLWG	Large Load Interconnection Reliability Requirements (LLWG) Interconnection Reliability Requirements Technical Compendium
June 29, 2026 LLWG	Large Load Interconnection Reliability Requirements (LLWG) Large Load Telemetry and PMU Requirements Large Load Operational Forecast Requirements Interconnection Reliability Requirements for Large Load Technical Compendium
July 15, 2026 PAC	Liaison Report
July 16, 2026 LLWG	Liaison Report Large Load BPM Development (LLWG)
July 27, 2026 LLWG	Large Load Interconnection Reliability Requirements (LLWG)

August 12, 2026 LLWG	Large Load Interconnection Reliability Requirements (LLWG)
August 27, 2026 LLWG	Large Load Interconnection Reliability Requirements Clean Tariff (LLWG) Large Load Interconnection Reliability Requirements Redline Tariff (LLWG) Large Load Interconnection Reliability Requirements Redline comparison (LLWG)

FERC rendition of the electronically filed tariff records in Docket No. ER26-03650-000

Filing Data:

CID	Filing Title	Company Filing Identifier	Type of Filing Code	Associated Filing Identifier
C001344	2026-08-28_Interconnection Reliability Requirements for Large Loads	16674	10	
	Tariff Title	**Tariff ID**	**Payment Confirmation**	**Suspension Motion**
	FERC Electric Tariff	9		

Tariff Record Data:

Record Content Description	**1.C**
Tariff Record Title	**Definitions - C**
Record Version Number	**81.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**5683**
Tariff Record Collation Value	**557911040**
Tariff Record Parent Identifier	**2261**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**CHANGE**
Record Content Type	**1**
Associated Filing Identifier	

Calculated Demand Response Resource-Type I Output: The hourly average Actual Energy Injection for each associated Demand Response Resource – Type I for the Hour for the purposes of assessing Excessive/Deficient Energy Deployment Charges.

Calculated Demand Response Resource-Type II Output: (i) For a DRR-Type II Resource that is providing Regulating Service, the Dispatch Interval Actual Energy Injections; or (ii) For a DRR-Type II Resource that is not providing Regulation Service, the average Dispatch Target for Energy for the DRR-Type II Resource, expressed in MW and scaled by Actual Energy Injection.

Calendar Day: Any day of the week, including Saturday, Sunday or a Federal holiday.

Candidate ARR (CARR): ARR nominations submitted by Market Participants to be considered throughout the Annual ARR Allocation process.

Candidate Baseload ARR: Candidate ARR rights equal to each Market Participant's Baseload Usage in an ARR Zone.

Candidate Peak ARR: Candidate ARR rights equal to each Market Participant's Peak Usage in an ARR Zone.

Candidate MTPS ARR: MTPS ARR nominations submitted by the Transmission Provider to be considered during the Annual ARR Allocation process.

Capacity: The instantaneous rate at which Energy can be delivered, received or transferred, including Energy associated with Operating Reserve, Up Ramp Capability, Down Ramp Capability, and Short-Term Reserve, measured in MW.

Capacity Deficiency Charge: A charge that is assessed to an LSE that has provided notification prior to the Planning Resource Auction that it will meet its Initial PRMR in part or in whole by paying the Capacity Deficiency Charge so that the Transmission Provider does

not clear associated Zonal Resource Credits (ZRC) for the associated Initial PRMR through the PRA process.

Capacity Export Limit (CEL): The amount of Planning Resources in MWs for an LRZ or ERZ determined by the Transmission Provider that can be reliably exported from that LRZ or ERZ for each Season.

Capacity Import Limit (CIL): The amount of Planning Resources in MWs for an LRZ determined by the Transmission Provider that can be reliably imported into that LRZ for each Season.

Capacity Replacement Non-Compliance Charge: The charge assessed to a Market Participant for failing to replace ZRCs that were designated for RAR and did not fulfill their performance obligations as set forth in Module E-1.

Capacity Resources: The Generation Resources, Demand Response Resource- Type I, Demand Response Resource-Type II, Dispatchable Intermittent Resources, External Resources, Intermittent Generation, or Electric Storage Resources that are available to meet Demand.

Carved Out GFA(s): Any Grandfathered Agreement(s) that the Commission has identified as "carved out" pursuant to Appendix B of the Commission's September 16, 2004 order, Midwest Independent Transmission System Operator, Inc., 108 FERC ¶ 61,236 (2004) or that meet the criteria in Section 38.8.3(A).b, and set forth in Attachment P to this Tariff, as that Attachment may be amended from time to time.

Cash Collateral Agreement: A Credit Support Document taking the form found in Exhibit III of Attachment L of this Tariff.

Cash Deposit: Cash collateral provided to Transmission Provider to secure Applicant's and/or

Tariff Customer's performance under the terms and conditions of Transmission Provider's Tariff, and/or other agreements.

Catastrophic Generator Outage: A forced outage that results in a unit being, or reasonably expected to be unavailable for a minimum of six (6) continuous months, which is not the result of a planned maintenance outage.

Category A Tariff Customer: A Tariff Customer who grants a continuing first-priority security interest to the Transmission Provider in all right, title and interest in any and all accounts receivable and other rights of payment of the Tariff Customer for goods and services provided under, or otherwise arising under, pursuant to or in connection with, the Tariff and/or any of the Agreements.

Category B Tariff Customer: Any Tariff Customer who does not grant a Receivable Security Interest to the Transmission Provider.

Change in Total System Cost: The net change in variable operational costs, which include fuel, variable O&M, variable environmental costs, and other variable costs as mutually agreed upon by the Transmission Provider and the Market Participant, measured in dollars as a result of changing the output of one or more units in response to a redispatch request from the Transmission Provider.

Charge: The withdrawal of energy from the Transmission System by an Electric Storage Resource for the purpose of storing the energy for injection back into the Transmission System at a later time.

Cleared Zonal Resource Credits (Cleared ZRCs): Zonal Resource Credits that have cleared the Planning Resource Auction, were used in a Fixed Resource Adequacy Plan, were used in a Reliability Based Demand Curve Opt Out, or are currently being used to replace ZRCs.

Coincident Peak Demand: The Demand in MWs, for an LSE and/or EDC, that occurs coincident to the peak Demand for each Season in the Transmission Provider Region, where all Demand has been augmented to include any known reductions in Demand related to LMRs.

Co-located Resources: Two or more Generators located behind the same point of interconnection that participate separately in the Energy and Operating Reserve Markets and share an Interconnection Service Limit.

Combined Reliability Systems: The Reliability Coordination Customer Transmission Facilities and all other transmission facilities for which the Transmission Provider performs Reliability Coordination Services under Part I of Module F.

Commercial Model: A presentation of the relationships between Market Participants and their Resources, Commercial Pricing Nodes and the Network Model in the Energy and Operating Reserve Markets.

Commercial Operation Date: Shall have the meaning set forth in Attachment X of this Tariff.

Commercial Pricing Node (CPNode): An Elemental Pricing Node or an Aggregate Price Node in the Commercial Model used to schedule and settle Market Activities. Commercial Pricing Nodes include Resources, Hubs, Load Zones and/or Interfaces.

Commercially Significant Voltage and Local Reliability Issue: Transmission System voltage or other local reliability concerns that result in Voltage and Local Reliability Commitments. These issues are designated for reasons including, but not limited to, occurrence frequency, monetary impact, or other criteria as defined in Schedule 44. A Local Balancing Authority or an interested Market Participant may request that the Transmission Provider evaluate a Voltage and Local Reliability Issue for designation as

commercially significant.

Commission: The Federal Energy Regulatory Commission, also known as FERC, or its successor.

Commitment Status: A specification submitted by a Market Participant in its Generation Offer, External Asynchronous Resource Offer, Demand Response Resource-Type I Offer, Demand Response Resource-Type II Offer, or Electric Storage Resource Offer for each Hour to indicate whether or how the Transmission Provider is authorized to commit the Resource or deploy the Resource for Operating Reserves for the Hour.

Common Bus: A single Bus to which two or more Resources are connected in an electrically equivalent manner where such Resources are treated as a single Resource for compliance monitoring purposes.

Common Information Model (CIM): The format adopted by the NERC Data Exchange Working Group that will be used by the Congestion Management Customer and the Transmission Provider to exchange Energy Management System models once a year.

Comparable FTRs: FTRs that are identical in all material respects except for the quantity of MW specified.

Competitive Developer Qualification Process: The process utilized to certify Qualified Transmission Developers pursuant to Section VIII.B of Attachment FF of the Tariff.

Competitive Developer Selection Process: The process utilized to solicit Proposals, evaluate Proposals, and designating a Selected Proposal and Selected Developer(s) pursuant to Section VIII of Attachment FF of the Tariff.

Competitive Substation Facility: A transmission substation facility contained within an Eligible Project that is subject to the Competitive Developer Selection Process in accordance with

Section VIII.A of Attachment FF of the Tariff.

C***ompetitive Transmission Executive Committee***: A committee consisting of three (3) or more executive staff of the Transmission Provider, including at least one (1) officer, that is charged with overseeing all Transmission Provider staff and consultants involved in evaluating Transmission Developer Applications and Proposals in response to a posted Request for Proposal. The Competitive Transmission Executive Committee will have exclusive and final decision-making authority over: (i) the certification and termination of Qualified Transmission Developers; and (ii) the evaluation and selection of Proposals, resulting in designating Selected Developers. The Competitive Transmission Executive Committee shall possess the specific technical, financial, and regulatory expertise necessary for evaluation of Transmission Developer Applications and Proposals.

Competitive Transmission Facility: A Competitive Substation Facility or Competitive Transmission Line Facility.

Competitive Transmission Line Facility: A transmission line facility contained within an Eligible Project that is subject to the Competitive Developer Selection Process in accordance with Section VIII.A of Attachment FF of the Tariff.

Competitive Transmission Process: The process utilized to certify Qualified Transmission Developers, identify Competitive Transmission Projects, solicit Proposals, evaluate Proposals, and designating a Selected Proposal and Selected Developer(s) pursuant to Section VIII of Attachment FF of the Tariff. The Competitive Transmission Process includes the Competitive Developer Qualification Process and Competitive Developer Selection Process.

Competitive Transmission Project: The Competitive Transmission Facilities contained within

an Eligible Project.

Competitively Sensitive Information: Information that is not public and the unauthorized disclosure of which could have anti-competitive effects, provide a competitor with an unfair or improper competitive advantage, or unfairly or improperly result in competitive harm, detriment, prejudice, disadvantage or injury to the legitimate proprietary rights, business or commercial interests, market position, or ability to bargain freely, of the lawful owners, possessors or users of such information.

Completed Application: An Application that satisfies all of the information and other requirements of the Tariff, including any required deposit.

Composite Credit Score: A composite numerical score scaled from 1.00 to 6.99, representing the sum of the Qualitative and Quantitative score as calculated by the Transmission Provider's credit scoring model in Attachment L of this Tariff.

Computational Load: Large Load comprised of 25 MW or more of Demand from information technology equipment, such as servers, storage, and networking hardware.

Confidential Information: Any proprietary or commercially or competitively sensitive information, trade secret or information regarding a plan, specification, pattern, procedure, design, device, list, concept, policy or compilation relating to the present or planned business of a Transmission Customer, Market Participant, or other user, which is designated as confidential by the entity supplying the information, whether conveyed orally, electronically, in writing, through inspection, or otherwise, that is received by the Transmission Provider and is not disclosed except under the terms of a Confidential Information policy.

Congestion Management Customer: Any entity taking Interconnected Operations and

Congestion Management Service under Part II of Module F.

Congestion Management Process (CMP): The process described in Attachment LL of the Tariff.

Constraint Contribution Factor: Factor that represents the impact that an incremental Actual Energy Injection or Actual Energy Withdrawal of one MW has on a given Active Transmission Constraint.

Constraint Generation Shift Factor Cutoff: A Generation Shift Factor level defined for each transmission constraint that determines the generating units to be included in a Broad Constrained Area, Narrow Constrained Area or Dynamic NCA associated with the constraint. Generation Resources with a Generation Shift Factor whose absolute value is greater than the Constraint Generation Shift Factor Cutoff are included in the Broad Constrained Area, Narrow Constrained Area or Dynamic NCA.

Constraint Management Charge Allocation Factor: A factor that is used to apportion Real-Time Revenue Sufficiency Guarantee Credits in an Hour between (i) the Real-Time Revenue Sufficiency Guarantee Constraint Management Charge and (ii) the Real-Time Revenue Sufficiency Guarantee Day-Ahead Schedule Deviation Charge and the Real-Time Revenue Sufficiency Guarantee Headroom Charge.

Contingency Reserve: Spinning Reserve and Supplemental Reserve provided by Resources available to the Transmission Provider to use in the event of a system contingency as specified in Schedule 5-Spinning Reserve and Schedule 6– Supplemental Reserve of this Tariff.

Contingency Reserve Deployment Failure Charge: A charge assessed to any Resource that fails to achieve in a Contingency Reserve Deployment Period at least one hundred

percent (100%) of the Contingency Reserve Deployment Instruction target.

Contingency Reserve Deployment Instruction: An instruction issued by the Transmission Provider to Resources with cleared Contingency Reserve to deploy a specific MW quantity of cleared Contingency Reserve as communicated via Setpoint Instructions or other electronic means.

Contingency Reserve Deployment Period: The period of time the Resource has to deploy Contingency Reserve following the issuance of a Contingency Reserve Deployment Instruction that is equal to ten minutes.

Contingency Reserve Offer Price Cap: The maximum price permitted for a Spinning Reserve Offer, an On-Line Supplemental Reserve Offer, an Off-Line Supplemental Reserve Offer or a Supplemental Reserve Offer in the Energy and Operating Reserve Markets.

Continuing Error: A continuing software, system or other execution that is inconsistent with the Tariff.

Control: The possession, directly or indirectly, of the power to direct the management or policies of a person or an entity. A voting interest of ten percent (10%) or more shall create a rebuttable presumption of Control.

Controllable Devices: Devices that may include phase shifters, DC lines, and back-to-back AC/DC converters.

Co-optimized Zonal Contingency Reserve Requirement: The minimum amount of Contingency Reserve the Transmission Provider needs to procure within a Reserve Zone as determined based upon co-optimization with Post Reserve Deployment Constraints.

Co-optimized Zonal Operating Reserve Requirement: The sum of the Co-optimized Zonal Contingency Reserve Requirement and Co-optimized Zonal Regulating Reserve

Requirement.

Co-optimized Zonal Regulating Reserve Requirement: The minimum amount of Regulating Reserve the Transmission Provider needs to procure within a Reserve Zone as determined based upon co-optimization with Post Reserve Deployment Constraints.

Co-optimized Zonal Short-Term Reserve Requirement: The minimum amount of Short-Term Reserve the Transmission Provider needs to procure within a Reserve Zone as determined based upon co-optimization with Post Reserve Deployment Constraints.

Co-optimized Zonal Spinning Reserve Requirement: The minimum amount of Spinning Reserve the Transmission Provider needs to procure within a Reserve Zone as determined based upon co-optimization with Post Reserve Deployment Constraints.

Coordinated Flowgate: A Flowgate that is subject to the Transmission Provider's or Coordination Customer's operational control and through which flows are affected by transmission over transmission facilities within its operational control, or with respect to which Transmission Provider serves as a Reliability Authority.

Coordinated Transaction Schedule: An Interchange Schedule to purchase Energy in the Real-Time Energy and Operating Reserve Market from a Source Point in either the MISO Balancing Authority Area or PJM Balancing Authority Area and sell it at a Sink Point in the other balancing authority area that is cleared if the forecasted LMP at the Sink Point minus the forecasted LMP at the Source Point is greater than or equal to the dollar value specified in the bid associated with the Interchange Schedule.

Coordinating Owner: Any entity that is not subject to the jurisdiction of the Commission but participating in the ISO through the execution of a coordination agreement which includes provisions for the elimination of rate pancaking. The terms and provisions of a

Coordinating Owner's coordination agreement shall supersede the similar terms and provisions of this Tariff where applicable.

Coordination Customer: Any customer taking Coordination Services from the Transmission Provider pursuant to Module F of the Tariff. The term Coordination Customer includes: Reliability Coordination Customer, and Congestion Management Customer.

Coordination Services: The services provided by the Transmission Provider pursuant to Module F of the Tariff. Coordination Services include Reliability Coordination Service and Interconnected Operations and Congestion Management Service.

Corporate Guaranty: A legal document taking the form found in Exhibit I of Attachment L of this Tariff used by an Affiliate of an Applicant and/or Tariff Customer that guarantees the obligations of such Applicant or Tariff Customer.

Cost Allocation Zone: The zones identified in Attachment WW of this Tariff used for allocating the costs of Market Efficiency Projects.

Cost of Congestion: The Marginal Congestion Component of LMP at the sink minus the Marginal Congestion Component of LMP at the source.

Cost of Losses: Marginal Losses Component of LMP at the sink minus the Marginal Losses Component of LMP at the source.

Cost of New Entry (CONE): The capital, operating, financial and other costs of acquiring a new Generation Resource within the Transmission Provider Region for any designated LRZ.

Council of the City of New Orleans (CNO): The governmental body with the power of supervision, regulation, and control over public utilities providing service within the City of New Orleans, *i.e.*, Entergy New Orleans, pursuant to the Constitution of the State of Louisiana and the Home Rule Charter of the City of New Orleans. CNO shall have all

the rights and responsibilities granted herein to states, state public utility commissions, state agencies, and State Regulatory Authorities.

Counterflow ARR: ARR allocated during the LTTR Restoration and Termination Stage of an Annual ARR Allocation based on a Counterflow ARR Entitlement.

Counterflow ARR Entitlement: Any Stage 1A eligible ARR Entitlement's portion that was not nominated in Stage 1A of a Market Participant's year 1 Annual ARR Allocation but that the Transmission Provider deems to provide counterflow necessary to enable curtailed Stage 1A CARRs to be restored (fully or partly) during the LTTR Restoration and Termination Stage of an Annual ARR Allocation.

Credit and Security Agreement: A Credit Support Document taking the form found in Exhibit V of Attachment L of this Tariff.

Credit Policy: The Transmission Provider's creditworthiness requirements and credit evaluation procedures as contained in Attachment L of this Tariff.

Credit Support Documents: Any agreement or instrument in any way guaranteeing or securing any or all of a Tariff Customer's obligations under this Tariff (including, without limitation, the Credit Policy), any agreement entered into under, pursuant to, or in connection with this Tariff or any agreement entered into under, pursuant to, or in connection with this Tariff or the Credit Policy, and/or any other agreement to which the Transmission Provider and the Tariff Customer are parties, including, without limitation, any Corporate Guaranty, Cash Collateral Agreement, Letter of Credit, Credit and Security Agreement or agreement granting a security interest.

Critical Energy Infrastructure Information (CEII): Confidential information described in 18 C.F.R § 388.113(c)(1), as may be amended from time to time.

Curtailment: A reduction in firm or non-firm Transmission Service in response to a transfer capability shortage as a result of system reliability conditions pursuant to Section 14.7 or Section 27A of this Tariff.

Customer Load Aggregation: A Load Zone approved by the Transmission Provider for the purposes of submitting Bids to or scheduling into the Energy and Operating Reserve Markets and for settlement of Market Activities.

Cyber Exigency: A suspicious electronic act or event that has the potential to compromise reliability within the Transmission Provider Region or other electrical facilities directly or indirectly connected to the Transmission System and whose severity reasonably requires that the Transmission Provider obtain expert assistance not normally called upon to counter such an electronic act or to resolve such an event.

Tariff Record Data:

Record Content Description	**1.L**
Tariff Record Title	**Definitions - L**
Record Version Number	**52.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**5692**
Tariff Record Collation Value	**557920256**
Tariff Record Parent Identifier	**2261**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**CHANGE**
Record Content Type	**1**
Associated Filing Identifier	

Large Load: Load with Demand of 50 MW or more associated with any facility or aggregation of facilities located at a single substation behind one or more Point(s) of Withdrawal from the Transmission System that is owned, operated, or controlled by: (a) a single entity, or (b) a group of entities that will coordinate with respect to the profile of the Load. Large Load does not include Load used exclusively for charging an Electric Storage Resource.

Large Load Equipment: Any of the facilities, devices, or equipment that constitutes a part of a Large Load, or are used to interconnect the Large Load to the Transmission System.

Legitimate Risks: Business operation risks, incurred by a Market Participant, that increase as a result of providing any of the products described in the Tariff. These risks include, but are not limited to, the risk of repair expenses; business interruption due to outages resulting from either a failure to start, or unplanned outages that occur when the facility is in service; regulatory restrictions; and disruptions from labor relations problems. These risks are in the nature of marginal costs included in Reference Levels. In contrast, the risk associated with fuel purchase price is not a component of Reference Levels, but rather a basis for the Fuel Cost Uncertainty Adder and some of the conduct thresholds under Module D.

Letter of Credit: A Credit Support Document taking the form found in Exhibit II of Attachment L to this Tariff.

Line Outage Distribution Factor (LODF): The percent of flow on line A, which is transferred to line B for the loss of line A.

Load: A term that refers to either an end-user of Energy, net of system losses, or the amount of Energy (MWh) consumed by such end-user within the Transmission Provider Region.

Load Forecast: An estimate of the amount of Energy (MWh) or Capacity (MW) to be consumed within the Transmission Provider's Region, prepared by the Transmission Provider based upon input from Local Balancing Authorities and Load Serving Entities, and used in the Transmission Provider's scheduling and dispatch decisions to ensure reliable operation of the MISO Balancing Authority.

Load Modifying Resource: A Demand Resource or Behind the Meter Generation Resource.

Load Modifying Resource Market Participant (LMR MP): A Market Participant that has the rights to control the energy demand or the energy production from a Load Modifying Resource.

Load Ratio Share: Ratio of a Transmission Customer's Network Load in a Zone to the total Load in that pricing Zone computed in accordance with Module B, Section 34.2 of this Tariff.

Load Serving Entity (LSE): Any entity that has undertaken an obligation to serve Load for end-use customers by statute, franchise, regulatory requirement or contract for Load located within or attached to the Transmission System, including but not limited to purchase-selling entities and retail power marketers with the obligation to serve Load. Where a distribution cooperative or a municipal distribution system otherwise covered by the prior sentence is a wholesale customer of a generation and transmission cooperative or a municipal Joint Action Agency, the generation and transmission cooperative, a state or federal agency or municipal Joint Action Agency may act as the Load Serving Entity for such distribution cooperative or municipal distribution system. Where retail Load switching occurs in a state, the entity with the obligation to serve Load is the LSE

Load Shedding: The systematic reduction of system demand by temporarily decreasing Load in

response to a Transmission System Emergency, Local Transmission Emergency, or MISO Balancing Authority Area or Sub-Area Capacity shortages, system instability, or voltage control considerations under Module B and Module C, of this Tariff.

Load Zone: A Zone determined by Market Participants representing an aggregate area of consumption for a single Load Serving Entity within the MISO Balancing Authority Area and used for the purposes of scheduling, reporting Actual Energy Withdrawal volumes, and settling Energy transactions at aggregated Load levels, approved and maintained by the Transmission Provider to facilitate transactions.

Local Balancing Authority (LBA): An operational entity or a Joint Registration Organization which is (i) responsible for compliance to NERC for the subset of NERC Balancing Authority Reliability Standards defined in the Balancing Authority Agreement for their local area within the MISO Balancing Authority Area, (ii) a Party to Balancing Authority Agreement, excluding MISO, and (iii) shown in Appendix A to the Balancing Authority Agreement.

Local Balancing Authority Area: Shall have the meaning set forth in the Balancing Authority Agreement.

Local Clearing Requirement (LCR): The minimum amount of Seasonal Accredited Capacity for an LRZ that is required to meet its LOLE for each Season while fully using the Zonal Import Ability for such LRZ and accounting for controllable exports.

Local Clearing Requirement Charge: A charge that is assessed to Load Serving Entities whenever an LRZ's Auction Clearing Price for a Season is increased due to its LCR being greater than the sum of individual Final PRMR of the LSEs.

Local Reliability Requirement (LRR): The minimum amount of Unforced Capacity for an LRZ

to meet its LOLE for each Season, without considering transmission ties to systems outside of the LRZ.

Local Resource Zone (LRZ): A geographic area within the Transmission Provider Region that is prescribed by the Transmission Provider, based upon the criteria in Section 68A.3, to address congestion that limits Planning Resource deliverability.

Local Resource Zone Peak Demand: The Demand in MWs, for an LSE and/or EDC, in a Local Resource Zone that occurs coincident to the peak Demand for each Season in the Local Resource Zone, where all Demand has been augmented to include any known reductions in Demand related to LMRs.

Local Short-Term Reserve: Short-Term Reserve available to the Transmission Provider to address transmission constraints in any Reserve Zone(s).

Local Short-Term Reserve Requirements: The amount of Local Short-Term Reserve, as determined pursuant to Module C of the Tariff, that the Transmission Provider is required to procure in a Reserve Zone.

Local Transmission Emergency: Transmission System conditions or events that have the potential to exceed or have exceeded operating limits that do not pose a risk of cascading to the interconnection but require emergency-level actions.

Locational Marginal Price (LMP): A price for Energy at a given Commercial Pricing Node in the Transmission Provider Region which is the marginal cost of serving demand at the Commercial Pricing Node while meeting Zonal and Market-Wide Operating Reserve Requirements, Up Ramp Capability requirements, Down Ramp Capability requirements, and Short-Term Reserve Requirements. Such price may be either Ex Ante or Ex Post.

Long-Term Firm Point-To-Point Transmission Service: Firm Point To Point Transmission

Service under Module B of this Tariff with a term of one (1) year or more.

Long Term Transmission Rights (LTTR): ARRs allocated in Stage 1A of the Annual ARR Allocation process. LTTRs carry annual rollover rights lasting ten (10) years or more.

Look Ahead Commitment (LAC): A process performed during the Real-Time Energy and Operating Reserve Market that develops Resource commitment and decommitment options that may be used by the Transmission Provider to ensure sufficient Resources will be available to meet Load Forecast, Operating Reserve, Up Ramp Capability, Down Ramp Capability, Short-Term Reserve and other demand requirements for the near term intra-hour intervals.

Loss of Load Expectation (LOLE): An estimate of the average number of days with supply interruption to end use customers, whether for a single hour or multiple hours in a day.

Loss of Load Probability Curve: The probability of shedding firm Load under varying levels of Contingency Reserve shortages, to be used in accordance with Schedule 28. This curve is further described in the Transmission Provider's Business Practices Manual for the Energy and Operating Reserves Markets (BPM-002).

Loss Pools: A single Local Balancing Authority Area or an aggregation of Local Balancing Authority Areas, including those Local Balancing Authority Areas operated by Coordinating Owners consistent with the terms and provisions of the Coordinating Owners agreement, designated by the Transmission Provider for the purposes of calculating and distributing Day Ahead and Real Time Hourly Marginal Losses Revenue Surplus.

Lost Opportunity Cost: The LMP revenues that were not realized relative to a theoretical future operating point.

Tariff Record Data:

Record Content Description	**1.P**
Tariff Record Title	**Definitions - P**
Record Version Number	**71.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**5696**
Tariff Record Collation Value	**557924352**
Tariff Record Parent Identifier	**2261**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**CHANGE**
Record Content Type	**1**
Associated Filing Identifier	

Partial-Year FTR Allocation: The procedure used by the Transmission Provider to allocate FTRs to Market Participants in the new ARR Zones added as a result of Transmission Provider Region expansion that becomes effective after the start of the Annual ARR Allocation period. The Partial-Year FTR Allocation will cover the partial year period when the new ARR Zone(s) become effective to the start of the next Annual ARR Allocation. For the partial year period, the Market Participants in the new ARR Zone(s) may request an allocation of FTRs, which will be in lieu of an allocation of ARRs.

Party(ies): The Transmission Provider, ITC where appropriate, Market Participants, Transmission Customers, or any combination of the above.

Past Due Amount: Any amount invoiced by the Transmission Provider that is not paid when due.

Peak Reserved Source Set: Set of Resources including those constituting the Baseload Reserved Source Point that have met the Resource Qualification Requirements for inclusion as a Reserved Source Point for a given ARR Zone.

Peak Usage: A Market Participant's Total Forecasted Peak Load in a given ARR Zone for the upcoming Annual ARR Allocation period calculated using the immediate prior three year actual peak Loads. The Total Forecast Peak Load is the sum of the forecast Network Integration Transmission Service peak Load for the upcoming allocation period plus peak Load served by Option A – Grandfathered Agreements plus peak Load served by Option B – Grandfathered Agreements.

Penalty Level: A component of a mitigation measure described in Module D that represents the amount of Energy purchased by a Market Participant that is an LSE or represents an LSE in the Real Time Energy Market in excess of the Allowance Level the entity is subject to.

Physical Withholding Threshold Quantity: Threshold employed by the IMM to identify physical withholding by a supplier of Planning Resources for the Planning Resource Auction, expressed in MW.

Plan: The Transmission Provider's Market Monitoring Plan set forth in Module D of this Tariff.

Planned Transmission Outage: Any transmission outage scheduled for the performance of maintenance or repairs or the implementation of a system enhancement which is planned in advance for pre-determined duration and which meets the notification requirements for such outages as specified by the Transmission Provider.

Planning Advisory Committee: A committee of stakeholders established under the ISO Agreement for the purpose of providing input to the planning staff on the development of the MTEP.

Planning Area(s): A collective or alternative reference to the First Planning Area and/or the Second Planning Area.

Planning Coordinator: The entity responsible for the longer term reliability of its planning coordinator area.

Planning Reserve Margin (PRM): The percentage above forecasted Coincident Peak Demand of Planning Resources for the Transmission Provider Region in order to meet the LOLE. This percentage will include a quantity sufficient to cover transmission losses.

Planning Reserve Margin Requirement (PRMR): The amount of ZRCs required of each LSE with Coincident Peak Demand in an LRZ to meet the LSE's Resource Adequacy Requirements in each Season.

Planning Resource: A Capacity Resource or Load Modifying Resource that can be used to satisfy PRMR.

Planning Resource Auction (PRA): Auctions conducted by the Transmission Provider to determine the ACP and the cleared ZRC Offers for each LRZ and ERZ for each Season in the applicable Planning Year.

Planning Year: The period of time from June 1st of one year to May 31st of the following year that is used for developing Resource Plans. The first Planning Year shall commence on June 1, 2009.

PMAX: The maximum Generator real power output reported in MWs on a seasonal basis.

PMIN: The minimum Generator real power output reported in MWs on a seasonal basis.

Point(s) of Delivery: Point(s) on the Transmission System where Capacity and Energy transmitted by the Transmission Provider will be made available to the Receiving Party under Module B and Module C of this Tariff. The Point(s) of Delivery shall be specified in the Service Agreement for Long Term Firm Point To Point Transmission Service or the HVDC Service Agreement.

Point(s) of Receipt: Point(s) of interconnection on the Transmission System where Capacity and Energy will be made available to the Transmission Provider by the Delivering Party under Module B and Module C of this Tariff. The Point(s) of Receipt shall be specified in the Service Agreement for Long Term Firm Point To Point Transmission Service or the HVDC Service Agreement.

Point(s) of Withdrawal: The point(s) where a non-transmission facility that is used to withdraw Energy from the Transmission System to serve Load connects to the Transmission System.

Point-To-Point Transmission Service: The reservation of Capacity and of Energy on either a firm or non firm basis from the Point(s) of Receipt to the Point(s) of Delivery under

Module B of this Tariff.

Portfolio: For Multi-Value Project purposes, means two or more Multi-Value Projects proposed to be located in one or more Transmission Pricing Zones that, when evaluated together, are expected to result in system-wide benefits across the MISO footprint or benefits across the subregion. For purposes of the Portfolio, subregion refers to either the MISO Midwest MVP Cost Allocation Subregion or MISO South MVP Cost Allocation Subregion.

Post Reserve Deployment Constraints: The post zonal Operating Reserve and Short-Term Reserve deployment flows on the transmission constraints and Sub-Regional Power Balance Constraints, used to determine the Co-optimized Zonal Regulating Reserve Requirement, Co-optimized Zonal Contingency Reserve Requirement, Co-optimized Zonal Spinning Reserve Requirement, and Co-optimized Zonal Short-Term Reserve Requirement, for each Reserve Zone.

Post Reserve Deployment Constraints Demand Curve: Demand curves used to price Post Reserve Deployment Constraints.

Power Purchaser: The entity that is purchasing the Capacity and reserved Energy to be transmitted under this Tariff.

PPA Schedule: Schedule associated with a PPA that is executed after April 3, 2014.

Pre-Confirmed Application: An Application that commits the Eligible Customer to execute a Service Agreement upon receipt of notification that the Transmission Provider can provide the requested Transmission Service.

Price Sensitive Demand Bids: Demand Bids in which the Market Participant specifies a maximum price (dollars per MWh) at which the Market Participant desires to purchase the designated MWh of Energy.

Price Taker: A Market Participant with an Energy and/or Operating Reserve Offer not capable of setting LMPs or MCPs.

Production Costs: The Energy output cost of a Generation Resource or a Demand Response Resource-Type II based upon Start Up, No Load and Energy Offer cost components set forth in an Offer or the Energy reduction cost of a Demand Response Resource-Type I based upon Shut Down Offer, Hourly Curtailment Offer and Energy Offer cost components set forth in an Offer.

Project Cost: All costs for Network Upgrades, as determined by the Transmission Provider to be a single transmission expansion project, including those costs associated with seeking and obtaining all necessary approvals for the design, engineering, construction, and testing of the Network Upgrades. These Network Upgrades will include costs classified by the Transmission Owners and Independent Transmission Companies as transmission plant using the Uniform System of Accounts 350 through 359 or equivalent set of accounts for any Coordinating Owner.

Project Financial Security: The Cash Deposit or Irrevocable Letter of Credit described in Appendix 1 to Attachment FF of the Tariff that a Selected Developer is required to provide.

Proposal: A proposal to construct, implement, own, operate, maintain, repair, and restore all Competitive Transmission Facilities associated with a Competitive Transmission Project, in response to a Request for Proposal. Proposals may be submitted in one of two different forms: (i) a Single-Developer Proposal; or (ii) a Joint-Developer Proposal. The term "Proposal" shall include "Single-Developer Proposal" and "Joint-Developer Proposal".

Proposal Cure Period: A period of time, as set forth within Attachment FF, Section VIII.D.10,

allowed for an RFP Respondent to correct deficiencies identified by the Transmission Provider in its previously submitted Proposal. The Proposal Cure Period commences upon notification by the Transmission Provider to an RFP Respondent of deficiencies in its Proposal.

Proposal Participant(s): Any entity or entities involved in a Proposal, excluding the RFP Respondent(s), that will co-own the Competitive Transmission Project and rely on the RFP Respondent(s) to be the Selected Developer(s) responsible for constructing and implementing the Competitive Transmission Facilities associated with the Competitive Transmission Project. Proposal Participants may be identified in a Proposal as responsible for one or more aspects of operations, maintenance, repair, or restoration, on terms comparable to those that would apply if the RFP Respondent(s) intended to rely on a third-party contractor.

Proposal Submission Deadline: The date and time Proposals must be submitted to the Transmission Provider by in order to be considered and evaluated by the Transmission Provider. The Submission Deadline shall be no later than 5:00 PM EPT on the date specified in the RFP, which shall not exceed one hundred and sixty-five (165) Calendar Days from the date the RFP was issued by the Transmission Provider, unless such date falls on a Saturday, Sunday, or MISO observed holiday in which case the Proposal Submission Deadline shall be the next Business Day that is not a MISO observed holiday.

Proposed Generator Planned Outage: The planned removal from service, in whole or in part, of a Generation Resource for inspection, maintenance or repair for which the Generation Owner has sought or will seek approval from the Transmission Provider for such planned removal in accordance with the Business Practices Manuals.

Protected Information: Privileged and non public information to be maintained by the

Transmission Provider.

Proxy Offers: The Offers created for resources that are deployed during Emergency operating procedures by the Transmission Provider as specified in Schedule 29A.

Pseudo-tie: A telemetered reading or value that is updated in real time and used as a tie line flow in the Area Control Error equation but for which no physical tie or energy metering actually exists. The integrated value is used as a metered MWh value for interchange accounting purposes. Pseudo tied status of Resources and Loads may only be changed during Network Model updates and the timing of such updates shall be as defined in the Business Practices Manuals.

Pseudo-tie Agreement: The Agreement between MISO and a Market Participant included as Attachment FFF-1 or Attachment FFF-2 to this Tariff, as applicable, outlining the terms and conditions of the real-time transfer of control of a generating unit or load to (or from) the MISO Balancing Authority Area from (or to) a specified external Balancing Authority Area.

Public Power: For credit scoring purposes, an Applicant or Market Participant that is a not for profit municipality, cooperative, Joint Action Agency, or agent representing one or more Public Power entities and whose credit quality is directly derived from the credit quality of the Public Power entities represented through the agency relationship.

Public Power Composite Score: For credit scoring purposes, the weighted average value of the Public Power Qualitative Score and the Public Power Quantitative Score. The relative weights are sixty percent (60%) and forty percent (40%).

Public Power Qualitative Score: A component of a Public Power Composite Score which has, for credit scoring purposes, a value ranging from 1 to 6.99, with 1 being the best and 6.99

being the worst. The value is based on a review by the Transmission Provider of qualitative factors relative to an Applicant's business, including but not limited to: i) regulatory; ii) legal; iii) demographic; and iv) energy supply/price factors as provided in Attachment L to this Tariff.

Public Power Quantitative Score: A component of a Public Power Composite Score which has, for credit scoring purposes, a value ranging from 1 to 6.99, with 1 being the best and 6.99 being the worst. The value is based on a review by the Transmission Provider of various financial metrics as detailed in the Transmission Provider's credit scoring model in Attachment L.

Tariff Record Data:

Record Content Description	**V**
Tariff Record Title	**REQUIREMENTS FOR LARGE LOAD**
Record Version Number	**31.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**12104**
Tariff Record Collation Value	**580911104**
Tariff Record Parent Identifier	**1990**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**NEW**
Record Content Type	**1**
Associated Filing Identifier	

Tariff Record Data:

Record Content Description	**37A**
Tariff Record Title	**Applicability of Large Load Reliability Requirements**
Record Version Number	**31.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**12105**
Tariff Record Collation Value	**580976640**
Tariff Record Parent Identifier	**12104**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**NEW**
Record Content Type	**1**
Associated Filing Identifier	

I. Applicability of Large Load Reliability Requirements

The Transmission Customer taking Transmission Service on behalf of a Large Load shall be responsible for complying with each of the requirements of this Section 37A applicable to each Large Load it represents.

Except as set forth in Section 37A.II, all Large Load shall be subject to the Basic Facility Data, Modeling, Telemetry, Forecast Data, and Audit requirements set forth in Sections 37A.1 through 37A.4 and section 37A.8 of the Tariff.

Except as set forth in Section 37A.II, Computational Load, shall be subject to the Phasor Measurement Unit, Ride-Through and Ramp requirements set forth in Sections 37A.5 through 37A.7 of the Tariff. The Transmission Provider shall determine whether Computational Load is associated with a Large Load based on information provided by the Transmission Customer to the Transmission Provider for such purpose, as set forth in the Business Practices Manual for Large Load.

A Transmission Customer taking Transmission Service on behalf of a Large Load shall demonstrate its ability to effectuate compliance with each of the requirements of this Section 37A. The Transmission Customer shall provide the Transmission Provider with documentation necessary for the Transmission Provider to verify compliance with the requirements of this Section 37A. Such documentation may include applicable agreement(s), if any, between the Transmission Customer and the entity or entities that own, operate or use the Large Load, or an attestation signed by an authorized officer of the Transmission Customer demonstrating that the Transmission Customer will be provided access to all information reasonably required to enable the Transmission Customer to comply with and for the requirements of this Section 37A, including compliance with the terms of any operating protocols adopted by the Transmission

Provider, Transmission Owner and/or the Transmission Customer for a specific Large Load.

Failure to comply with the requirements established in this Section 37A may result in a delayed Service Commencement Date, a period of time needed for corrective action, operational limitations, or other remediation action(s) by Transmission Provider as may be necessary to maintain Transmission System reliability. The process by which Transmission Provider will determine whether any such measures are appropriate, which may include the period of time during which corrective action must be undertaken, shall be as set forth in the Business Practices Manual for Large Load.

II. Transition Provisions

1) For purposes of these transition provisions, Load associated with a transmission project shall be defined as meeting the "MTEP/EPR Condition" if the project has either: (a) been approved by the Transmission Provider Board in MTEP 2026, or a prior MTEP; or, (b) been submitted to the Transmission Provider for Expedited Project Review (EPR) on or prior to June 18, 2026, in accordance with Attachment FF of the Tariff.

2) A Transmission Customer taking Transmission Service on behalf of a Large Load shall ensure that all Large Load shall be subject to all the requirements as set forth in this Section 37A, provided that:

(a) Fully Exempt Large Load:

A Large Load that has a Service Commencement Date on or prior to December 4, 2026, shall be exempt from all requirements set forth in this Section 37A with respect to the portion of the Large Load that has procured Transmission Service as of the Service Commencement Date.

Any modification or series of modifications to a Load that meets the MTEP/EPR Condition, which results in a cumulative increase of 25 MW or more in Transmission Service for such Load and with a Service Commencement Date after December 4, 2026, shall be subject to subsection (2)(b) below.

(b) Partially Exempt Large Load:

(i) A Large Load, or a portion of a Large Load, that does not have a Service Commencement Date prior to December 4, 2026, but that meets the MTEP/EPR Condition as defined herein shall be subject to the requirements set forth in Sections 37A.1 through 37A.5 and Section 37A.8, and shall be exempt from the requirements set forth in Sections 37A.6 through 37A.7.

(ii) A Large Load, or a portion of Large Load, that does not have a Service Commencement Date prior to December 4, 2026, and that has not met the MTEP/EPR Condition but has submitted Load associated with a transmission project to the Transmission Provider for EPR on or after June 19, 2026, but on or before October 31, 2026, shall be subject to all requirements set forth in this Section 37A, provided that Transmission Provider may waive the requirements set forth in Section 37A.6 based upon a determination that: a) exemption from such requirements would not have an adverse reliability impact; and, b) compliance with such requirements would result in significant costs. The Business Practices Manual for Large Load shall set forth the process and documentation

necessary for Transmission Provider to determine whether such criteria have been met.

(c) Non-Exempt Large Load:

A Large Load, or a portion of a Large Load, that does not meet the MTEP/EPR Condition shall be subject to all applicable requirements set forth in this Section 37A.

3) Notwithstanding any of the provisions above the Transmission Provider has the right to require compliance with any or all requirements of this Section 37A if the Transmission Provider determines that operation of a Large Load results in a material adverse effect on Transmission System reliability. The process by which Transmission Provider will make such a determination and which, if any, of the requirements of this Section 37A are to be applied shall be as set forth in the Business Practices Manual for Large Load.

Tariff Record Data:

Record Content Description	**37A.1**
Tariff Record Title	**Large Load Information and Basic Facility Data Requirements**
Record Version Number	**31.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**12106**
Tariff Record Collation Value	**581042176**
Tariff Record Parent Identifier	**12104**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**NEW**
Record Content Type	**1**
Associated Filing Identifier	

Large Load Information and Basic Facility Data Requirements

A Transmission Customer taking Transmission Service on behalf of a Large Load shall be responsible for providing the Transmission Provider with basic information, one-line diagrams, and a description of the electrical characteristics of the Large Load for all Large Load Equipment, in the format and consistent with the timelines specified in the Business Practice Manual for Large Load. Any changes to the characteristics of a Large Load and/or Large Load Equipment, including any changes to the modeling details for the Large Load, shall be provided to the Transmission Provider in a timely manner, consistent with the Business Practices Manual for Large Load. Such changes may include, but are not limited to, Load MW amounts, firm and non-firm MW amounts, any dispatchable Load MWs, power factor, metering, telemetry, breaker configuration, staged Load additions and annual energy as further set forth in the Business Practices Manual for Large Load.

A Transmission Customer taking Transmission Service on behalf of a Large Load must coordinate with the Transmission Owner where the Large Load Point(s) of Withdrawal is located pursuant to the Transmission Provider's load interconnection guidance and applicable NERC standards.

Tariff Record Data:

Record Content Description	**37A.2**
Tariff Record Title	**Large Load Modeling Requirements**
Record Version Number	**31.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**12107**
Tariff Record Collation Value	**581107712**
Tariff Record Parent Identifier	**12104**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**NEW**
Record Content Type	**1**
Associated Filing Identifier	

Large Load Modeling Requirements

A Transmission Customer taking Transmission Service on behalf of a Large Load shall provide the Transmission Provider with verified and complete electrical models of the Large Load, as well as detailed Load profiles, for modeled Loads, in the format and consistent with the timelines specified in the Business Practice Manual for Transmission Planning. Such model information must include sufficient detail for the Transmission Provider to evaluate system performance under contingency conditions in accordance with currently active versions of Transmission System Planning Performance Standards.

Following completion of applicable studies and prior to the Service Commencement Date of the Large Load, the Transmission Customer shall submit final verified models to the Transmission Provider in accordance with the Business Practices Manual for Large Load. The Transmission Customer shall provide notice to the Transmission Provider of any material modifications to the Large Load and shall not implement any such proposed modifications until studied and approved by the Transmission Provider in accordance with the Business Practices Manual for Large Load.

The final models of a Large Load shall reflect the as-built configuration and actual operating characteristics of the Large Load and Large Load Equipment. The Transmission Customer shall maintain and update models as required by the Transmission Provider.

Tariff Record Data:

Record Content Description	**37A.3**
Tariff Record Title	**Large Load Telemetry Requirements**
Record Version Number	**31.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**12108**
Tariff Record Collation Value	**581173248**
Tariff Record Parent Identifier	**12104**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**NEW**
Record Content Type	**1**
Associated Filing Identifier	

Large Load Telemetry Requirements

Prior to the later of the Service Commencement Date of a Large Load or September 1, 2027, a Transmission Customer taking Transmission Service on behalf of a Large Load must provide real-time telemetry for the Large Load, either directly, through the applicable Transmission Owner, or other Transmission Provider-approved communication path, in the form and manner as set forth in the Business Practices Manual for Large Load.

Individual metering will be required for all Large Load and any Generation Resource(s) serving such Large Load that is located behind the same Point(s) of Withdrawal to the Transmission System as the Large Load and meeting thresholds outlined in the Business Practices Manual for Large Load. All telemetry shall be provided via Inter-Control Center Communications Protocol (ICCP) and must meet Transmission Provider update requirements as specified in the Business Practices Manual for Large Load. The Transmission Customer must use commercially reasonable efforts to maintain telemetry availability and accuracy for the Large Load and must promptly correct erroneous data, bad mappings, and ICCP modeling issues.

Tariff Record Data:

Record Content Description	**37A.4**
Tariff Record Title	**Large Load Forecast Data Requirements**
Record Version Number	**31.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**12109**
Tariff Record Collation Value	**581238784**
Tariff Record Parent Identifier	**12104**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**NEW**
Record Content Type	**1**
Associated Filing Identifier	

Large Load Forecast Data Requirements

Prior to the later of the Service Commencement Date of a Large Load or September 1, 2027, a Transmission Customer taking Transmission Service on behalf of a Large Load must provide day(s) ahead and real-time Load Forecasts for a Large Load directly to the Transmission Provider to support the Reliability Assessment Commitment (RAC) and Security Constrained Economic Dispatch (SCED) processes, along with other reliability studies. The Load Forecasts shall be updated to reflect the most current information on the expected Demand, in accordance with the Business Practices Manual for Large Load.

Tariff Record Data:

Record Content Description	**37A.5**
Tariff Record Title	**Large Load Phasor Measurement Unit Requirements**
Record Version Number	**31.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**12110**
Tariff Record Collation Value	**581304320**
Tariff Record Parent Identifier	**12104**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**NEW**
Record Content Type	**1**
Associated Filing Identifier	

Large Load Phasor Measurement Unit Requirements

The Transmission Customer taking Transmission Service on behalf of a Computational Load shall be subject to the Phasor Measurement Unit (PMU) requirements set forth in this Section 37A.5. Prior to the later of the Service Commencement Date of a Large Load or September 1, 2027, phasor measurement recording and communications equipment must be installed by the Transmission Owner, at the Transmission Customer's expense, that is capable, at a minimum, of gathering phasor measurements as specified in Business Practices Manual for Large Load. The phasor measurement equipment must be installed at the Transmission Owner's side of the Point(s) of Withdrawal and become part of the Transmission Owner interconnection facilities. To the extent similar quality equipment is being added or already exists, such as relays or digital fault recorders, that can collect data at least at the same rate as PMU and which data is synchronized via a high-accuracy satellite clock, such equipment may be utilized to satisfy this requirement if the equipment is located on the Transmission Owner's side of the Point(s) of Withdrawal. Phasor measurements must be streamed in the format specified in the Business Practices Manual for Large Load and be provided to the Transmission Provider by the Transmission Owner.

Tariff Record Data:

Record Content Description	**37A.6**
Tariff Record Title	**Large Load Ride-Through Requirements**
Record Version Number	**31.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**12112**
Tariff Record Collation Value	**581369856**
Tariff Record Parent Identifier	**12104**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**NEW**
Record Content Type	**1**
Associated Filing Identifier	

Large Load Ride-Through Requirements

A Transmission Customer taking Transmission Service on behalf of a Computational Load shall be responsible for ensuring that the Computational Load remains connected to the Transmission System and continue operation during voltage and frequency disturbances within the performance criteria established by the Transmission Provider in the Business Practices Manual for Large Load.

Ride-through requirements apply at the Point(s) of Withdrawal and may include evaluation, testing, modeling, monitoring, and other compliance measures established by the Transmission Provider in the Business Practices Manual for Large Load.

Tariff Record Data:

Record Content Description	**37A.7**
Tariff Record Title	**Large Load Ramp Requirements**
Record Version Number	**31.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**12113**
Tariff Record Collation Value	**581435392**
Tariff Record Parent Identifier	**12104**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**NEW**
Record Content Type	**1**
Associated Filing Identifier	

Large Load Ramp Requirements

A Transmission Customer taking Transmission Service on behalf of a Computational Load shall be subject to the ramp requirements set forth in this Section 37A.7. Ramp limits shall be measured in aggregate across the applicable Point(s) of Withdrawal during stable-state transition, including any reduction/ramp smoothing provided by generation or other resources that meets the eligibility requirements specified in the Business Practices Manual for Large Load. Computational Load shall be subject to up-ramp and down-ramp limits established by the Transmission Provider consistent with the process set forth in the Business Practices Manual for Large Load. The Computational Load must have an effective up and down ramp rate not exceeding the specified limit outlined in the Business Practices Manual for Large Load unless otherwise directed by the Balancing Authority, Reliability Coordinator, or Transmission Operator.

Tariff Record Data:

Record Content Description	**37A.8**
Tariff Record Title	**Large Load Audit Rights**
Record Version Number	**31.0.0**
Option Code	**A**
Record Narrative Name	
Tariff Record ID	**12114**
Tariff Record Collation Value	**581500928**
Tariff Record Parent Identifier	**12104**
Proposed Date	**2026-12-04**
Priority Order	**1000000000**
Record Change Type	**NEW**
Record Content Type	**1**
Associated Filing Identifier	

Large Load Audit Rights

The Transmission Provider has the right to audit or verify the information provided by a Transmission Customer taking Transmission Service on behalf of a Large Load including, but not limited to, information related to the registration, claimed capacity, operations, modeling, inverter settings, metering, settlements, Large Load Equipment, and/or any other information related to the participation of the Large Load under this Tariff. The Transmission Customer shall maintain individual Large Load data and information related to the registration, Load Forecasts, operations, modeling, metering, and/or settlements for five (5) Years. The Transmission Provider shall maintain individual Large Load data and information it receives related to the registration, Load Forecasts, operations, modeling, metering, and/or settlements for five (5) Years.

Document Content(s)

IRR Transmittal Letter.pdf 1
Tab A - IRR Tariff Redline.pdf 33
Tab B - IRR Tariff Clean.pdf 74
Tab C - Testimony of BeiBei Li.pdf.....115
FERC GENERATED TARIFF FILING.PDF.....160