ER Routing Slip

Date Received 7/31/2023

Parish VM

Archaeology RW \ 8/31/2023
Initial Date

Historic Preservation JG \ 8/21/2023
Initial Date

A	HP	
☑	☑	No Properties\No Historic Properties Affected
☐	☐	No Historic Properties Adversely Affected Historic
☐	☐	Properties Adversely Affected

Comments:

From: Office of Coastal Management
To: ELIZABETH.HILL@LA.GOV; LES.ROSSO@LA.GOV; VERMILIONPPJ@YAHOO.COM; JOHAN.FORSMAN@LA.GOV; DCRT Section 106; HANNAH.PITTS@LA.GOV; BRYAN.HITT@LA.GOV; RANDALL.WITHERS@LA.GOV; TOBY.PICARD@LA.GOV; CHRISTINE.CHARRIER@LA.GOV; SARA.KRUPA@LA.GOV; STEVEN.GIAMBRONE@LA.GOV; EDWARD.E.GRAHAM@EXXONMOBIL.COM; THAMMOND@DDGPC.COM
Subject: P20221080 - Notice
Date: Monday, July 31, 2023 2:11:43 PM

EXTERNAL EMAIL Please do not click on links or attachments unless you know the content is safe.

If you would like to respond, provide comment or contact someone about this application please click the OCM Analyst name below to send an email to the permit analyst, use the "Make Comments" link below to post a comment to the administrative record or call the OCM Analyst at 225-342-7591 or 800-267-4019. Be sure to reference your P# as found in the subject of this email. Do not use the "reply" button to respond to this email as this account is not monitored for incoming messages.

Coastal Use Permit Application Information

Applicant:	ExxonMobil Low Carbon Solutions Onshore Storage LLC
Project:	Pecan Island Area Project
Project Parish(es):	VERMILION

OCM Analyst:	Andi Zachary (andi.zachary@la.gov)
Preliminary Determination:	Coastal Use Permit
Application Modification:	N/A

Notice for the above application has been initiated.

You can view the Notice at:

Notice
Application
Make Comments

Louisiana Department of Natural Resources
Office of Coastal Management (OCM)

Joint Permit Application
For Work Within the Louisiana Coastal Zone

U.S. Army Corps Of Engineers (COE)
New Orleans District

Print Application

Permit Number: P20221080 Date Received: 07/28/2023

Step 1 of 15 - Applicant Information

Applicant/Company Name: ExxonMobil Low Carbon Solutions Onshore Storage LLC

Applicant Type: INDUSTRY/OIL AND GAS

Mailing Address: 22777 Springwoods Village Parkway
Spring, TX 77389

Contact Information: Edward Graham

Daytime: 281 851 7750 ***Fax:*** ***Contact Email:***

Step 2 of 15 - Agent Information

Company Name: Duplantis Design Group

Mailing Address: 1308 Camellia Blvd., Suite 200
Lafayette, LA 70508

Contact Information: Tiffany Hammond

Daytime: 225 276 1988 ***Fax:*** ***Contact Email:*** thammond@ddgpc.com

Step 3 of 15 - Permit Type

☒ Coastal Use Permit (CUP) ☐ Solicitation of Views (SOV) ☐ Request for Determination (RFD)

Step 4 of 15 - Pre-Application Activity

a. Have you participated in a Pre-Application or Geological Review Meeting for the proposed project?

☐ No ☒ Yes **Date meeting was held: 02/02/2023**

Attendees: Tiffany Hammond (Individual or Company Rep), Brad Hester (OCM Representative), James Little (COE Representative)

b. Have you obtained an official wetland determination from the COE for the project site?

☒ No ☐ Yes **JD Number:**

c. Is this application a mitigation plan for another CUP?

☒ No ☐ Yes **OCM Permit Number:**

Step 5 of 15 - Project Information

a. Describe the project:

The Project proposes to conduct geological investigations to characterize subsurface geology and evaluate the feasibility of using pore space for potential permanent carbon dioxide (CO_2) storage in this pore space. The proposed Project involves the installation of two (2), approximately 12,000 TVD feet stratigraphic test wells and associated activities required for equipment access. Associated activities would include creating a channel used for barge and drill rig access, platform installation, well installation at the two (2) proposed locations, and spoil/berm creation. There is no staging area associated with this Project. The test wells may remain in place for use in potential future carbon storage projects, but only in the event that the test well data supplies information that the area is suitable for carbon storage. If the test well's data yields the area(s) are not suitable for carbon storage the wells may be plugged and capped.

b. Is this application a change to an existing permit?

☒ No ☐ Yes **OCM Permit Number:**

c. Have you previously applied for a permit or emergency authorization for all or any part of the proposed project?

☒ No ☐ Yes

Agency Name	Permit Number	Decision Status	Decision Date
OCM			
COE			

Other

Step 6 of 15 - Project Location

a. Physical Location

Street:

City: Abbeville **Parish:** VERMILION **Zip:** 70510

Water Body: Off the GIWW and North Prong of Schooner Bayou

b. Latitude and Longitude

Latitude: 29 47 44.82 **Longitude:** -92 13 37.45

c. Section, Township, and Range

Section #: **Township #:** **Range #:**

Section #: **Township #:** **Range #:**

d. Lot, Tract, Parcel, or Subdivision Name

Lot #: **Parcel #:**

Tract #: **Subdivision Name:**

e. Site Direction:

Start - I-10 toward Lafayette. Take Exit 100 toward LA-3184/Ambassador Caffery Parkway. Turn Left onto Ambassador Caffery Parkway. Keep RIGHT onto Ambassador Caffery Parkway. Turn RIGHT onto Johnston Street. Turn RIGHT onto Fountainhead Drive. Turn slightly LEFT onto Fountainhead Drive. Turn LEFT onto Fountain Bend Drive. Turn RIGHT onto Johnston Street (US-167). Turn LEFT onto W. Summers Drive (LA-14-BYP). Turn RIGHT on N State Street. Continue on S State Street. Turn RIGHT onto Alcide Drive. Continue on LA-333. Turn LEFT on Speckled Avenue. Turn LEFT on Pintail Ave. End at Intracoastal City RV Lot and Dock. From there you will need to take boat to access the sites.

Step 7 of 15 - Adjacent Landowners

Step 8 of 15 - Project Specifics

a. Project Name and/or Title: Pecan Island Area Project

b. Project Type: Non-Residential

c. Jurisdiction: State Concern

d. Source of Funding: Private

e. What will be done for the proposed project?

☐ Bridge/Road	☐ Home Site/Driveway	☐ Pipeline/Flow Line	☒ Rip Rap/Erosion Control
☒ Bulkhead/Backfill	☐ Levee Construction	☐ Plug/Abandon	☒ Site Clearance
☐ Drainage Improvements	☒ Dredging	☐ Production Barge/Structure	☐ Subdivision
☒ Drill Barge/Structure	☒ Prop Washing	☐ Vegetative Plantings	☐ Wharf/Pier/Boathouse
☒ Drill Site	☒ Pilings	☐ Remove Structures	
☒ Fill	☐ Marina	☐ Major Industrial/Commercial	
☐ Other:			

e. Why is the proposed project needed?

Preliminary investigations suggest that the geological formations in this location may be optimal for the geologic storage of CO2. The two (2) proposed test well locations are necessary to obtain geologic information of the subsurface formations to further evaluate their suitability for possible CO2 storage.

Step 9 of 15 - Project Status

a. Proposed project start date: 05/01/2023 ***Proposed project completion date:*** 12/31/2025

b. Is any of the project work in progress?

☒ No ☐ Yes

c. Is any of the project work complete?

☒ No ☐ Yes

Step 10 of 15 - Structures, Materials, and Methods for the Proposed Project

a. Excavations

403072.6 **yd³** 32.9 **Acres**

b. Fill Areas

328882 **yd³** 85 **Acres**

c. Fill Materials

☐	Concrete:	yd³	☐	Rock:	yd³
☐	Crushed Stone or Gravel:	yd³	☐	Sand:	yd³
☒	Excavated and placed onsite: 328882	yd³	☐	Hauled in topsoil/Dirt:	yd³
☒	Excavated and hauled offsite: 74190.6	yd³			
☐	Other:	yd³			

d. What equipment will be used for the proposed project?

☒	Airboat	☐	Bulldozer/Grader	☒	Marsh Buggy
☐	Backhoe	☒	Dragline/Excavator	☐	Other Tracked or Wheeled Vehicles
☒	Barge Mounted Bucket Dredge	☐	Handjet	☐	Self Propelled Pipe Laying Barge
☒	Barge Mounted Drilling Rig	☐	Land Based Drilling Rig	☒	Tugboat
☒	Other: Refer to Sheet 13 in Exhibits				

Step 11 of 15 - Project Alternatives

a. Total acres of wetlands and/or waterbottoms filled and/or excavated.

117.89 acres

b. What alternative locations, methods, and access routes were considered to avoid impact to wetlands and/or waterbottoms?

Refer to Attachment B: Alternative Analysis

c. What efforts were made to minimize impact to wetlands and/or waterbottoms?

Design of this Project is to complete the work in the smallest footprint possible to safely complete the project. Impacts have been reduced based on a detailed analysis of the proposed barge access route to refine the methods that will be used to supply the necessary depths for barge passage. Bathymetric data, soil data, and site-specific marsh conditions were analyzed to identify the shortest and most efficient path to provide access to the test well, while reducing the amount of dredging and reducing impacts to the waterbottoms. Refer to Attachment B: Alternative Analysis for further detail.

d. How are unavoidable impacts to vegetated wetlands to be mitigated?

Compensation for all unavoidable impacts to wetlands will occur by purchasing compensatory mitigation credits from a USACE and OCM-approved mitigation bank within the watershed. At the time of permit application development, sufficient in-kind mitigation credits are available within the Project watershed according to the USACE RIBITS system and OCM Mitigation Bank Summary sheet. If there is a deficit of credits in mitigation banks, the Applicant will work with the Agencies to either develop a PRM Site or pay a In-Lieu Fee.

Step 12 of 15 - Permit Type and Owners

a. Are you applying for a Coastal Use Permit?

☐ No ☒ Yes

b. Are you the sole landowner/oyster lease holder?

☒ No ☐ Yes

☐ The applicant is an owner of the property on which the proposed described activity is to occur.

☒ The applicant has made reasonable effort to determine the identity and current address of the owner(s) of the land on which the proposed described activity is to occur, which included, a search of the public records of the parish in which the proposed activity is to occur.

☒ The applicant hereby attests that a copy of the application has been distributed to the following landowners/oyster lease holders.

Landowner/Oyster Lease Holder:	Exxon Mobil Corporation
Mailing Address:	22777 Springwoods Village Parkway
City/State/Zip:	Spring TX 77389

c. Does the project involve drilling, production, and/or storage of oil and gas?

☒ No ☐ Yes

Step 13 of 15 - Maps and Drawing Instructions

2023_07_26_JPA_AttachmentA_Exhibit_Package.pdf	07/26/2023 11:21:01 AM
2023_07_26_JPA_AttachmentC_BUDM_Plan.pdf	07/26/2023 11:21:08 AM
2023_06_19_Rev4_JPA_AttachmentB_Alternatives.pdf	06/19/2023 09:04:23 AM

Step 14 of 15 - Payment

The fee for this permit is: $100.00

Step 15 of 15 - Payment Processed

Applicant Information

Applicant Name: ExxonMobil Low Carbon Solutions Onshore Storage LLC
Address: 22777 Springwoods Village Parkway
City/State/Zip: Spring, TX 77389

Application Information

Permit Type: CUP

To the best of my knowledge the proposed activity described in this permit application complies with, and will be conducted in a manner that is consistent with the Louisiana Coastal Resources Program. If applicable, I also certify that the declarations in Step 12c, oil spill response, are complete and accurate.

View Comments related to this project





GENERAL NOTES:

1. PRIOR TO COMMENCEMENT OF WORK, THE CONTRACTOR SHALL ENSURE ALL APPLICABLE PERMITS ARE SECURED & THE LOUISIANA ONE CALL SYSTEM HAS BEEN CONTACTED.
2. ALL ELEVATIONS REFER TO NAVD 88 UNLESS NOTED OTHERWISE.
3. THE USACE FEATURES REPRESENTED ARE BASED ON FIELDWORK PERFORMED BY DDG ON 11-28-22.

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

VICINITY MAP

SCALE IN FEET

5000 2500 0 5000

N

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA
FOR ExxonMobil Low Carbon Solutions Onshore Storage LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944
PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR


SHEET
1 of 18

Z:\2022\22-1578\CIVIL\CAD\PERMITS\PREVIOUS\2023-07-10 REVISION 3\22-1578 EM 1 VICINITY MAP.DWG

© 2022 DUPLANTIS DESIGN GROUP, P.C.

Location of Material	Total Excavated (yd^3)	Spoil for Berm (yd^3)	Fill for Beneficial Use (yd^3)
Test Well #1	311,642.2	38,609.4	273,032.8
Test Well #2*	80,723.6	6,533.0	0.0
N. Prong of Schooner Bayou	10,706.8	0.0	10,706.8

74,190.6 cu yds of material will be hauled offsite.

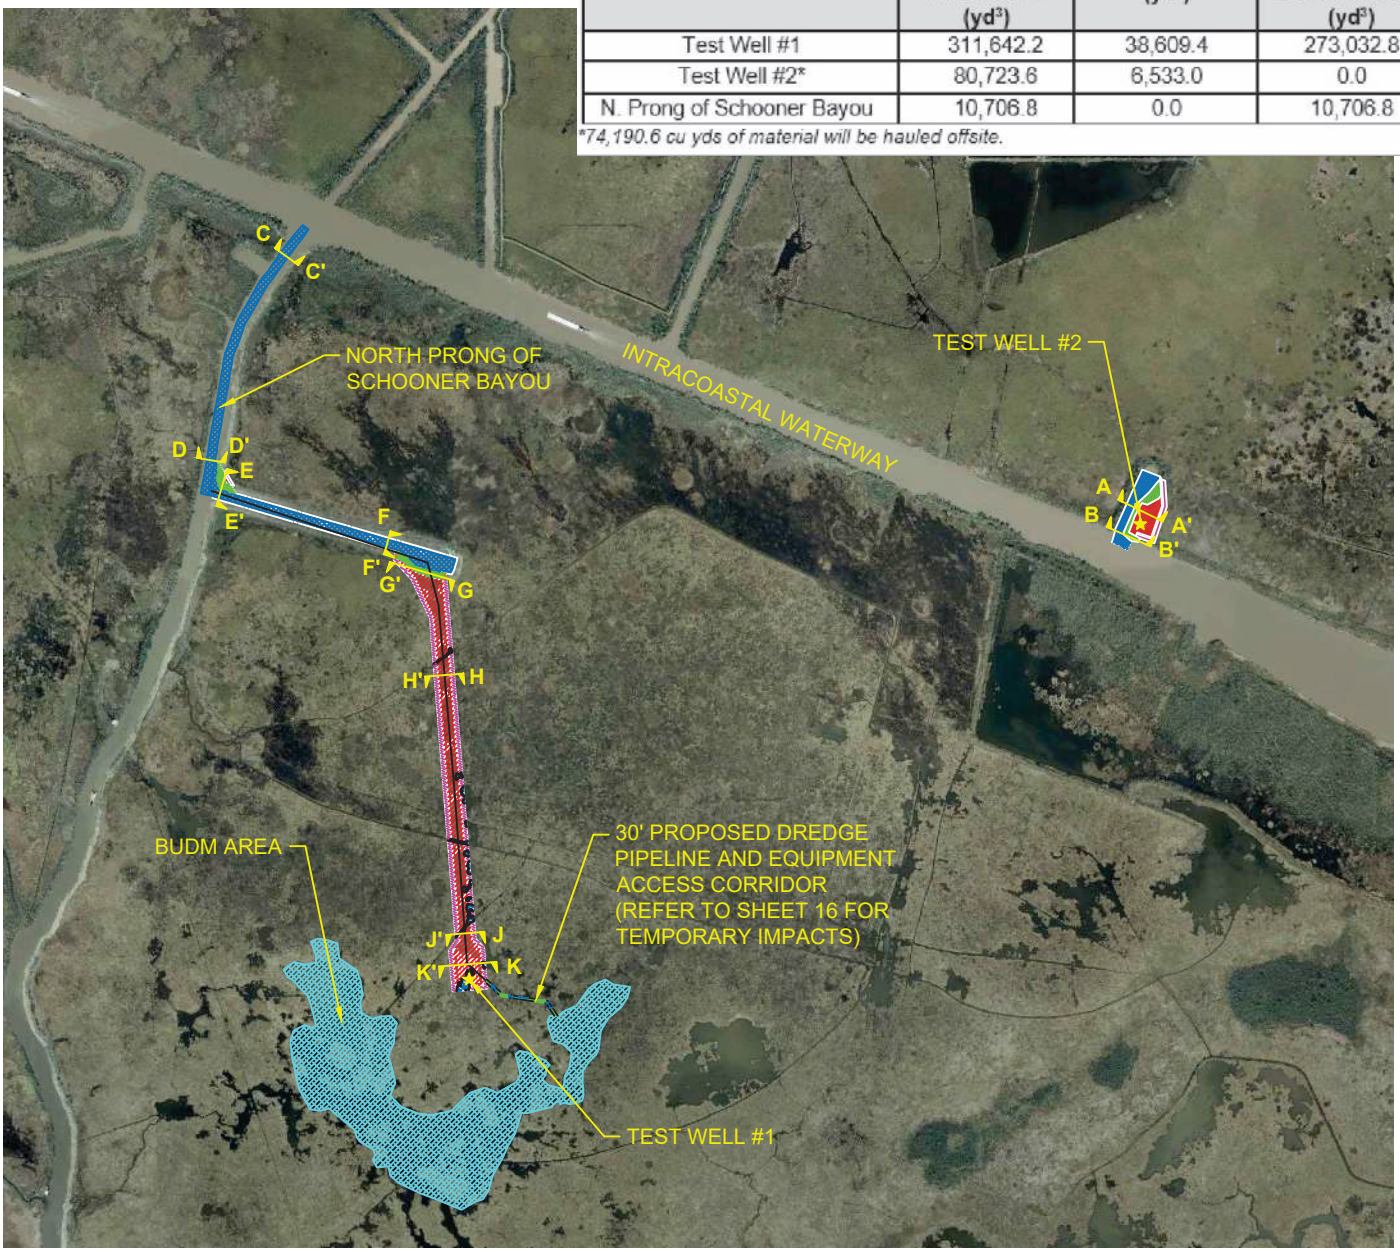

*ALL IMPACTS ON PROJECT SITES ARE PERMANENT

IMPACTS	
HABITAT TYPE	**ACREAGE**
MARSH	22.1 AC.
WATERBOTTOMS	14.6 AC.
UPLAND	2.7 AC.
BUDM AREA	78.5 AC.

*FOR ALL CROSS SECTIONS, SEE SHEETS 6-10

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

OVERALL PROJECT SITE

SCALE IN FEET

2000 1000 0 2000

N

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA
FOR ExxonMobil Low Carbon Solutions Onshore Storage LLC


PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944
PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR

SHEET
2 of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.

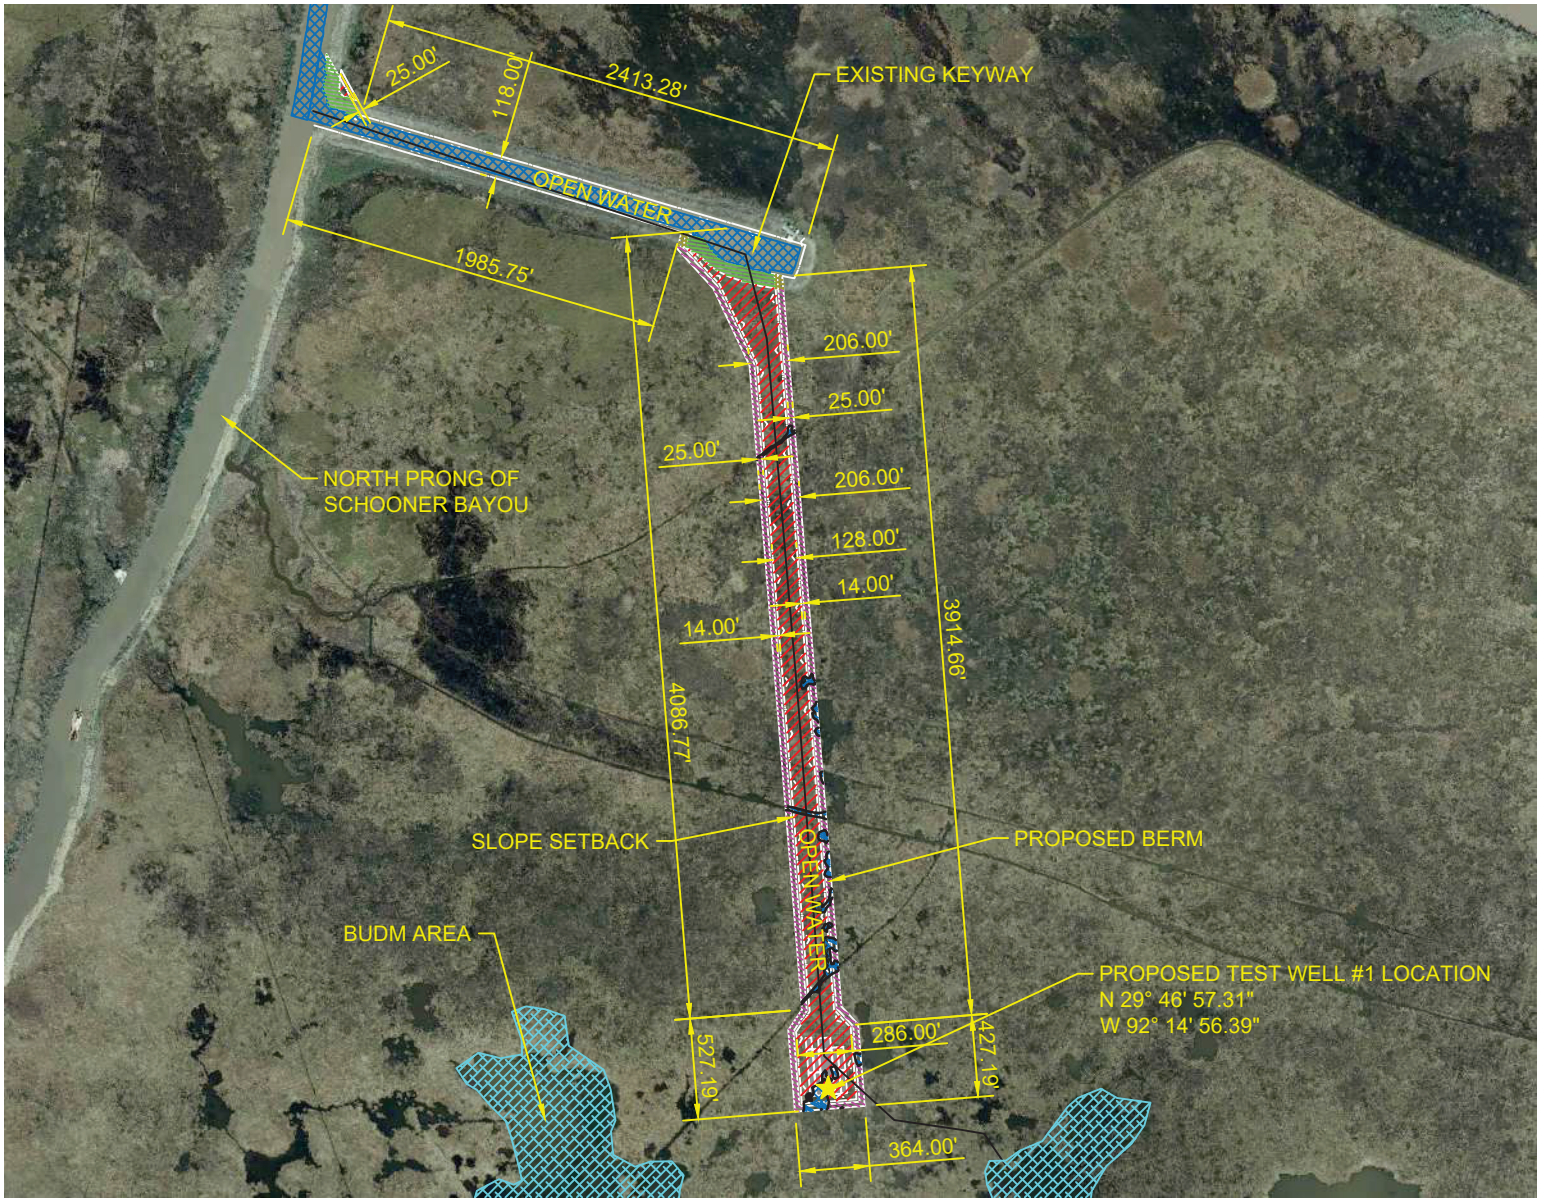

FILL MARSH
5.0 ACRES_ 32,533.4 CY

FILL WATER
0.6 ACRES_ 5,627.7 CY

FILL UPLANDS
0.2 ACRES_ 448.3 CY

EXCAVATED MARSH
14.6 ACRES_238,430.2 CY

EXCAVATED WATERBOTTOMS
6.5 ACRES_ 48,847.9 CY

EXCAVATED UPLANDS
1.4 ACRES_ 24,364.1 CY

BUDM AREA
78.5 ACRES

*TOTAL AREA = 33.3 ACRES. 5.2 ACRES OF SLOPE BUFFER
*WOODY DEBRIS WILL BE DISPOSED OF OFF-SITE

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

TEST WELL #1
SITE PLAN

SCALE IN FEET

1000 500 0 1000

N

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA
FOR ExxonMobil Low Carbon Solutions Onshore Storage LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944
PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR

SHEET
3a of 18

Z:\2022\22-1578\CIVIL\CAD\PERMITS\PREVIOUS\2023-07-10 REVISION 3\22-1578 EM 3A TEST WELL 1 SITE.DWG

© 2022 DUPLANTIS DESIGN GROUP, P.C.



INSET "A"

SCALE: 1"=200'

FILL MARSH
5.0 ACRES_ 32,533.4 CY

FILL WATER
0.6 ACRES_ 5,627.7 CY

FILL UPLANDS
0.2 ACRES_ 448.3 CY

EXCAVATED MARSH
14.6 ACRES_238,430.2 CY

EXCAVATED WATERBOTTOMS
6.5 ACRES_ 48,847.9 CY

EXCAVATED UPLANDS
1.4 ACRES_ 24,364.1 CY

BUDM AREA
78.5 ACRES

*TOTAL AREA = 33.3 ACRES. 5.2 ACRES OF SLOPE BUFFER
*WOODY DEBRIS WILL BE DISPOSED OF OFF-SITE

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

PROPOSED POST-CONSTRUCTION SITE PLAN FOR TEST WELL #1

SCALE IN FEET

1000 500 0 1000

N

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA
FOR ExxonMobil Low Carbon Solutions Onshore Storage LLC


PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944
PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR

SHEET
3b of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.

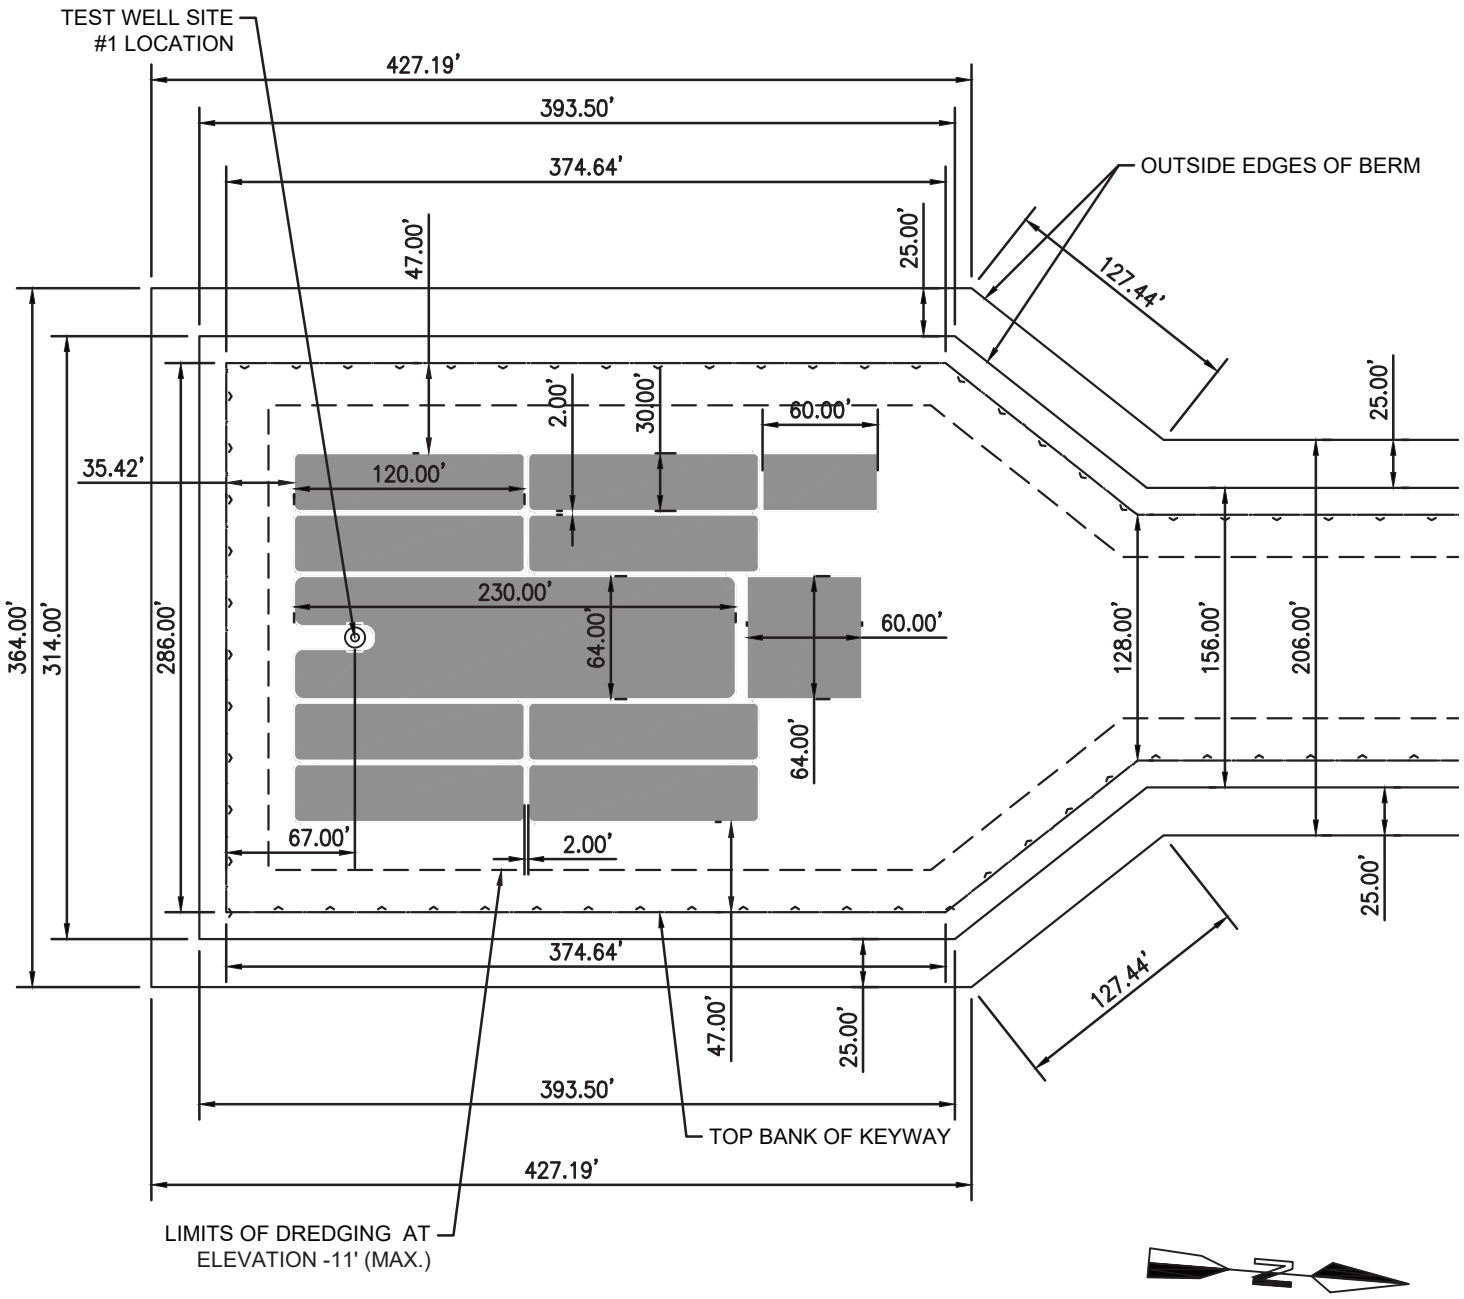

PROPOSED KEYWAY SITE PLAN FOR TEST WELL #1

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

SCALE IN FEET

100 50 0 100

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA

FOR ExxonMobil Low Carbon Solutions Onshore Storage, LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944

PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR

SHEET

3c of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.



FILL MARSH
0.7 ACRES_6,533.0 CY

FILL UPLANDS
0 ACRES_0.0 CY

EXCAVATED MARSH
1.9 ACRES_29,231.0 CY

EXCAVATED WATERBOTTOMS
2.6 ACRES_29,282.2 CY

EXCAVATED UPLANDS
1.1 ACRES_22,210.4 CY

*BALANCE OF EXCAVATED MATERIAL WILL BE HAULED OFF-SITE (73,961.19 CY)
*WOODY DEBRIS WILL BE DISPOSED OF OFF-SITE

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

TEST WELL #2 SITE PLAN

SCALE IN FEET

200 100 0 200

N

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA
FOR ExxonMobil Low Carbon Solutions Onshore Storage, LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944
PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR

SHEET
4a of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.



*SEE SHEET 6 FOR CROSS SECTION

PROPOSED POST-CONSTRUCTION SITE PLAN FOR TEST WELL #2

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

SCALE IN FEET

200 100 0 200

N

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA

FOR ExxonMobil Low Carbon Solutions Onshore Storage, LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944


PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR

SHEET
4b of 18

Z:\2022\22-1578\CIVIL\CAD\PERMITS\PREVIOUS\2023-07-10 REVISION 3\22-1578 EM 4B POST-CONSTRUCTION TEST WELL 2 SITE.DWG

© 2022 DUPLANTIS DESIGN GROUP, P.C.

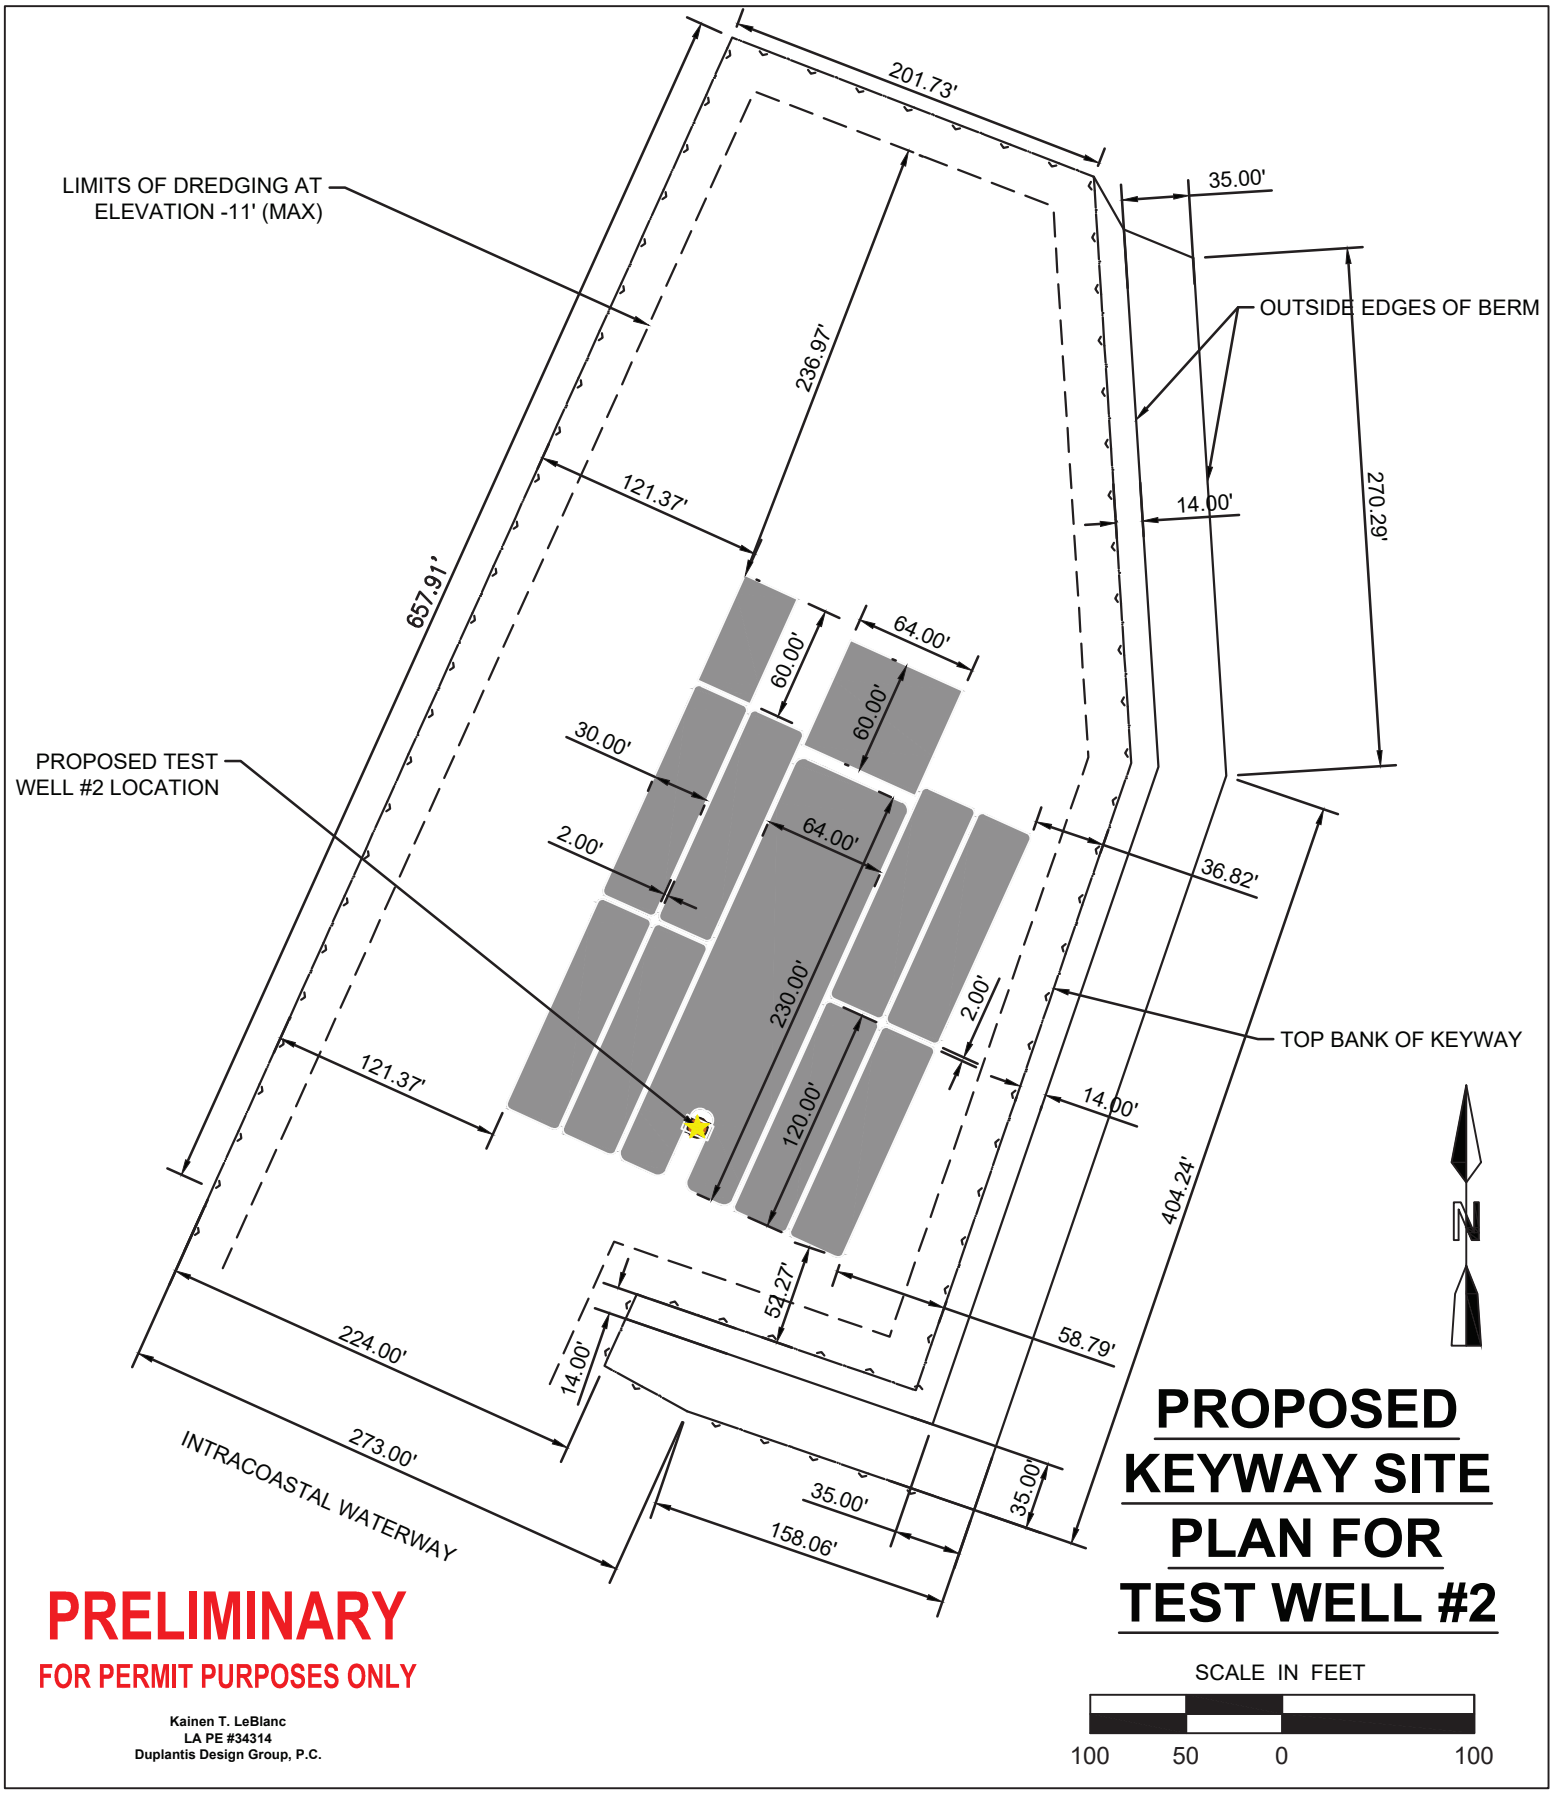

PROPOSED KEYWAY SITE PLAN FOR TEST WELL #2

SCALE IN FEET

100 50 0 100

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA

FOR ExxonMobil Low Carbon Solutions Onshore Storage, LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944

PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023


CHECKED TH
DRAWN BY AMR


SHEET

4c of 18

Z:\2022\22-1578\CIVIL\CAD\PERMITS\PREVIOUS\2023-07-10 REVISION 3\22-1578 EM 4C TEST WELL 2 SITE BARGE LAYOUT.DWG

© 2022 DUPLANTIS DESIGN GROUP, P.C.

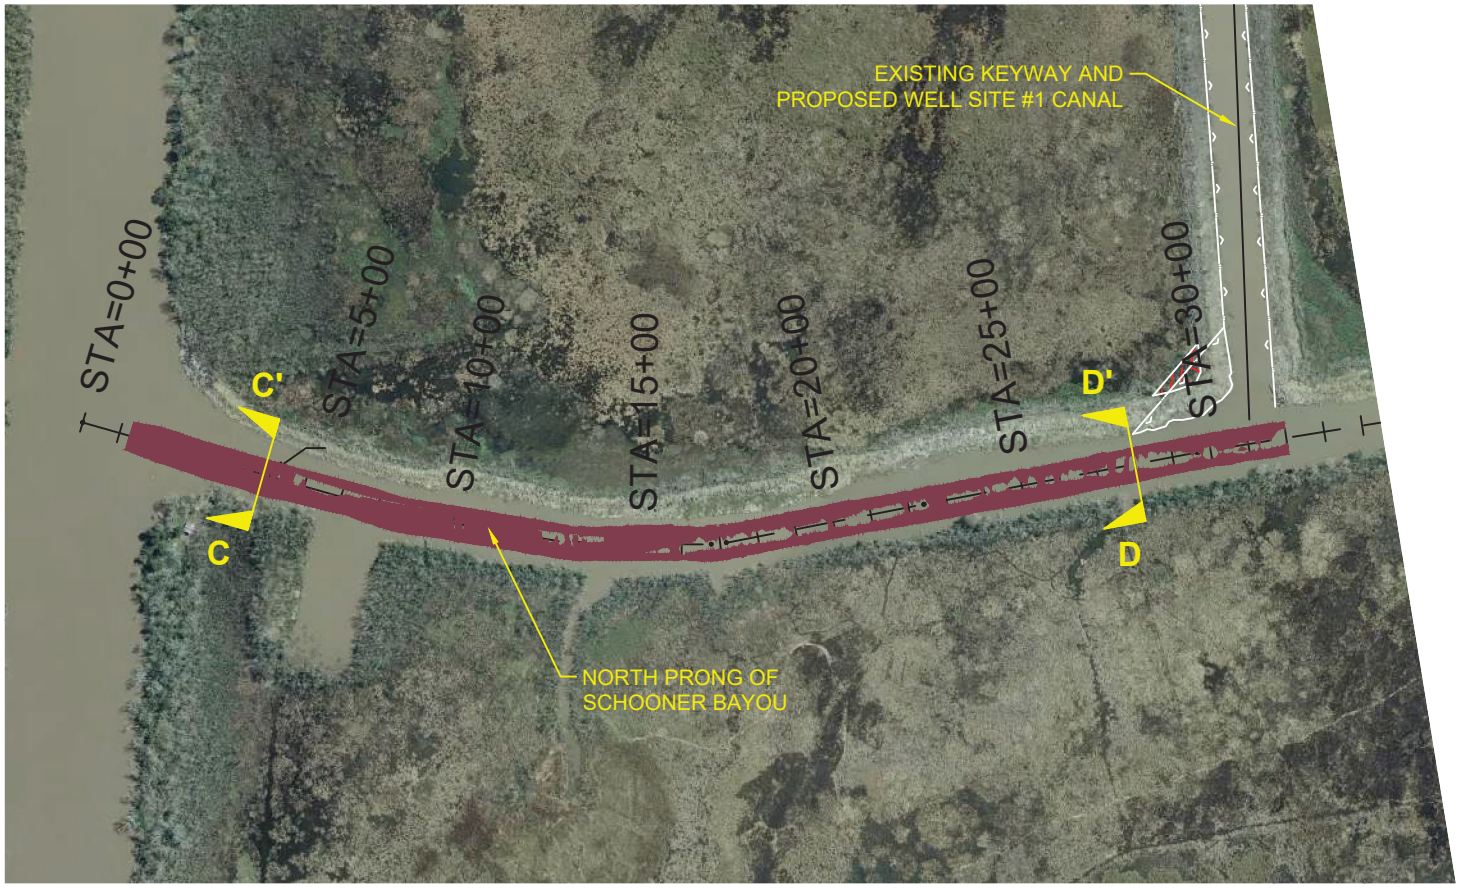

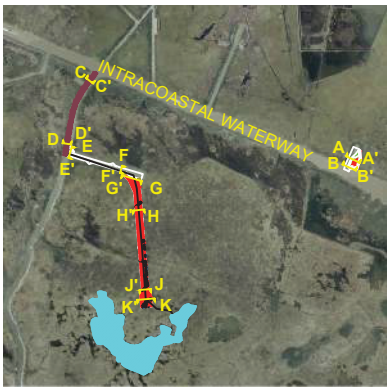

OVERALL SITE VIEW

SCALE: 1" = 6,500'

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

EXCAVATED WATERBOTTOMS
4.89 ACRES_10,706.8 CY

Elevations Table			
Number	Minimum Elevation	Maximum Elevation	Color
1	−6.147	0.000	

SCHOONER BAYOU DREDGING PLAN

SCALE IN FEET

500 250 0 500

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA

FOR ExxonMobil Low Carbon Solutions Onshore Storage, LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944


PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR


SHEET
5 of 18

Z:\2022\22-1578\CIVIL\CAD\PERMITS\PREVIOUS\2023-07-10 REVISION 3\22-1578 EM 5 SCHOONER BAYOU.DWG

© 2022 DUPLANTIS DESIGN GROUP, P.C.

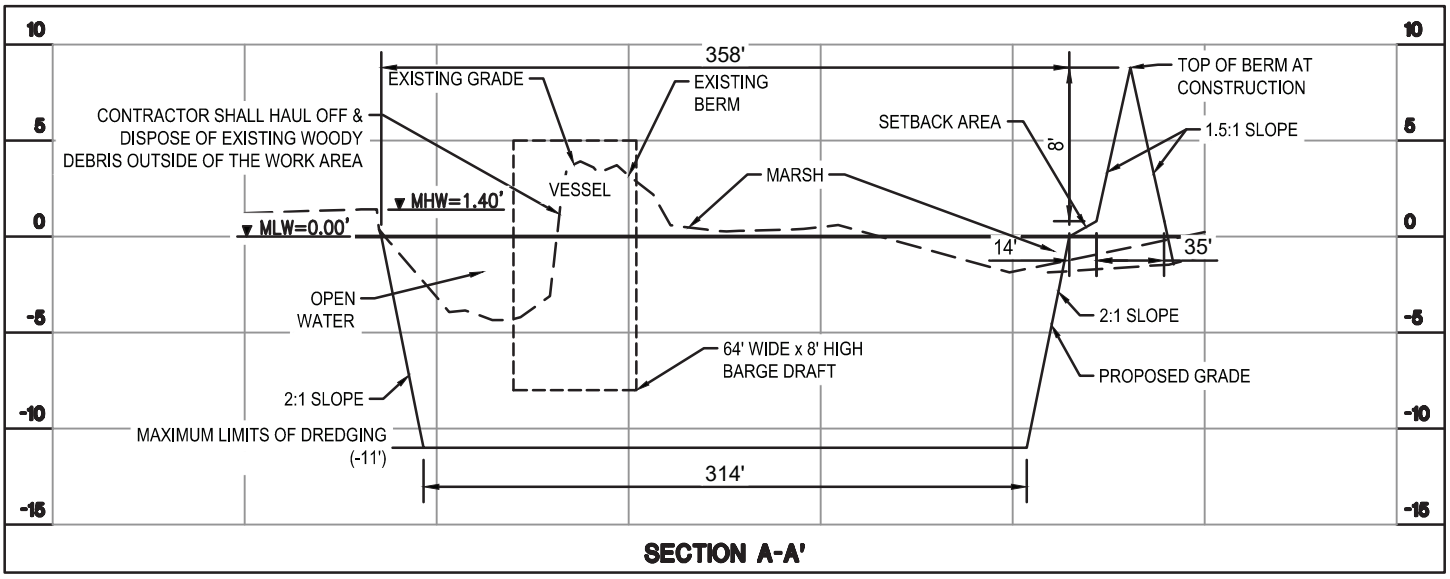

SECTION A-A'

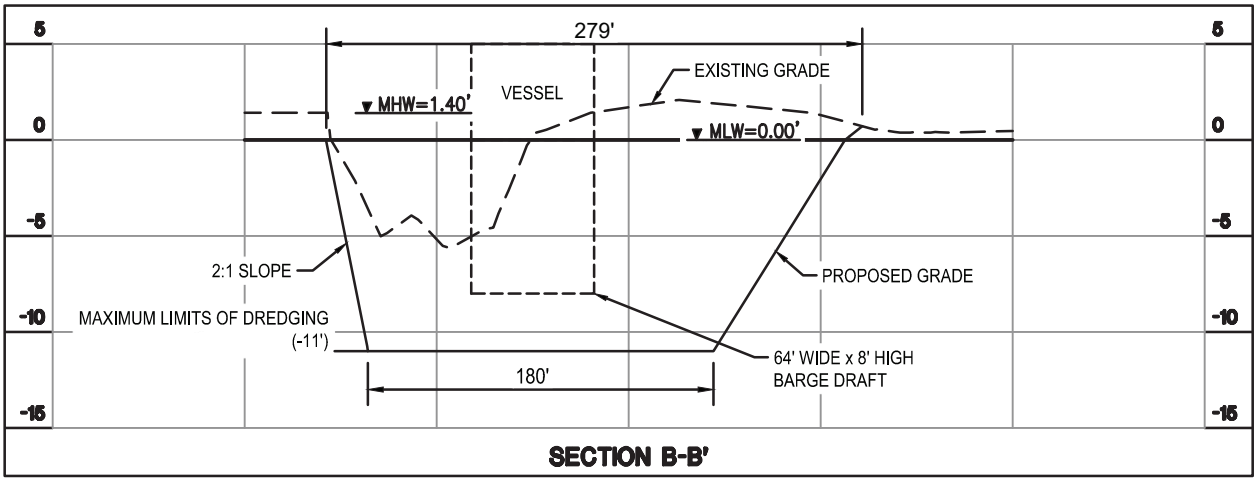

SECTION B-B'

NOTES:
1. THE DREDGING TEMPLATE IS 2' BELOW MAX VESSEL DRAFT TO ALLOW FOR TRANSIT OF TUGS AND DRILL BARGE AT LOW TIDE WITH A 1' OF DREDGE OVER DEPTH.
2. MHW & MLW ARE PROVIDED IN NAVD 88.
3. THE MHW & MLW ELEVATION PROVIDED IS BASED ON HOBO DATA LOGGERS INSTALLED WITHIN THE PROJECT FOOTPRINT AREA.
4. WATER LEVEL DATA IS ACTIVELY BEING COLLECTED AND DATA MAY BE REVISED BASED ON THE DATA PROVIDED.

VERTICAL
SCALE IN FEET

10 5 0 10

HORIZONTAL
SCALE IN FEET

100 50 0 100

* SECTION LOCATION DENOTED ON SHEET 2

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

PROJECT CROSS SECTIONS

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA
FOR ExxonMobil Low Carbon Solutions Onshore Storage LLC


PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944
PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023


CHECKED TH
DRAWN BY AMR

SHEET
6 of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.

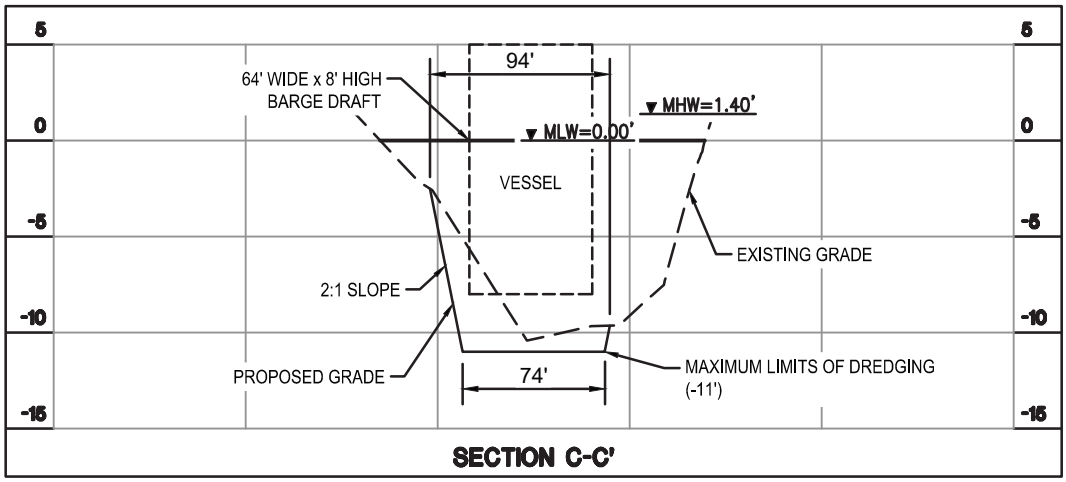

SECTION C-C'

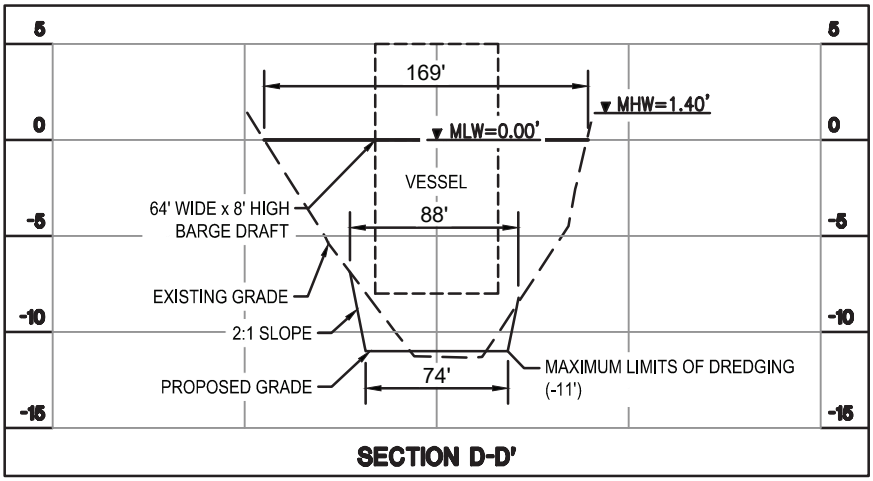

SECTION D-D'

NOTES:
1. THE DREDGING TEMPLATE IS 2' BELOW MAX VESSEL DRAFT TO ALLOW FOR TRANSIT OF TUGS AND DRILL BARGE AT LOW TIDE WITH A 1' OF DREDGE OVER DEPTH.
2. MHW & MLW ARE PROVIDED IN NAVD 88.
3. THE MHW & MLW ELEVATION PROVIDED IS BASED ON HOBO DATA LOGGERS INSTALLED WITHIN THE PROJECT FOOTPRINT AREA.
4. WATER LEVEL DATA IS ACTIVELY BEING COLLECTED AND DATA MAY BE REVISED BASED ON THE DATA PROVIDED.

VERTICAL
SCALE IN FEET

10 5 0 10

HORIZONTAL
SCALE IN FEET

100 50 0 100

* SECTION LOCATION DENOTED ON SHEET 2

PRELIMINARY
FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

PROJECT CROSS SECTIONS

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET
VERMILION PARISH, LOUISIANA
FOR ExxonMobil Low Carbon Solutions Onshore Storage LLC


PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944
PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023


CHECKED TH
DRAWN BY AMR

SHEET
7 of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.

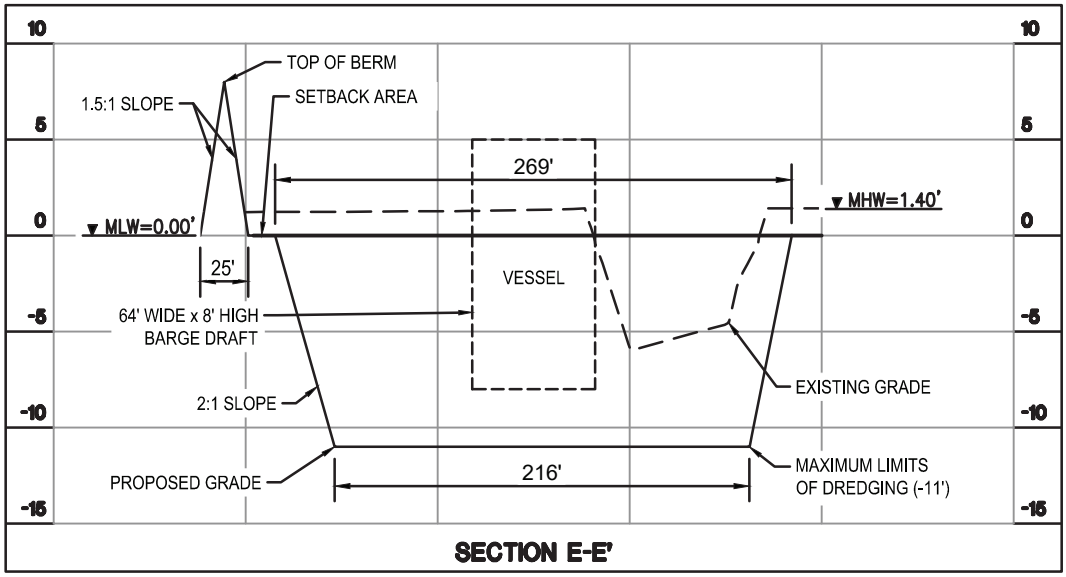

SECTION E-E'

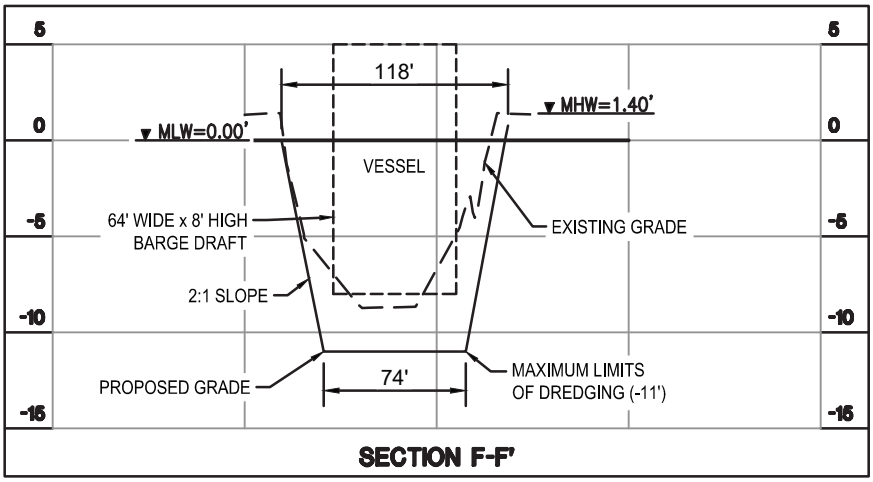

SECTION F-F'

NOTES:
1. THE DREDGING TEMPLATE IS 2' BELOW MAX VESSEL DRAFT TO ALLOW FOR TRANSIT OF TUGS AND DRILL BARGE AT LOW TIDE WITH A 1' OF DREDGE OVER DEPTH.
2. MHW & MLW ARE PROVIDED IN NAVD 88.
3. THE MHW & MLW ELEVATION PROVIDED IS BASED ON HOBO DATA LOGGERS INSTALLED WITHIN THE PROJECT FOOTPRINT AREA.
4. WATER LEVEL DATA IS ACTIVELY BEING COLLECTED AND DATA MAY BE REVISED BASED ON THE DATA PROVIDED.

VERTICAL
SCALE IN FEET

10 5 0 10

HORIZONTAL
SCALE IN FEET

100 50 0 100

* SECTION LOCATION DENOTED ON SHEET 2

PRELIMINARY
FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

PROJECT CROSS SECTIONS

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET
VERMILION PARISH, LOUISIANA
FOR ExxonMobil Low Carbon Solutions Onshore Storage LLC


PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944
PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023


CHECKED TH
DRAWN BY AMR

SHEET
8 of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.

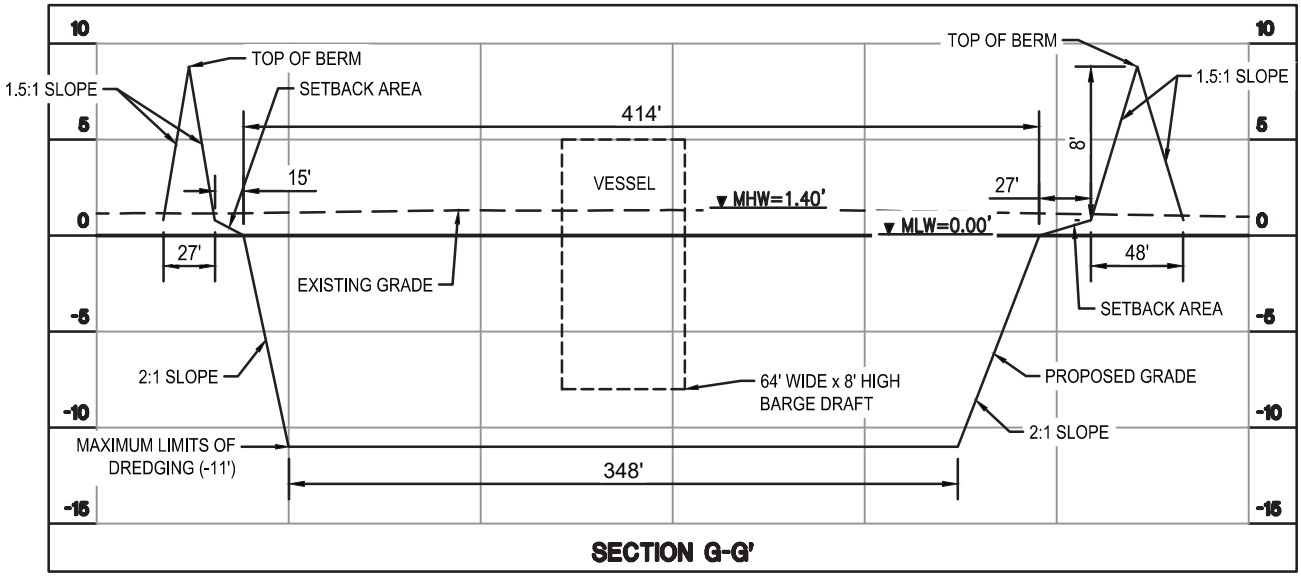


SECTION G-G'

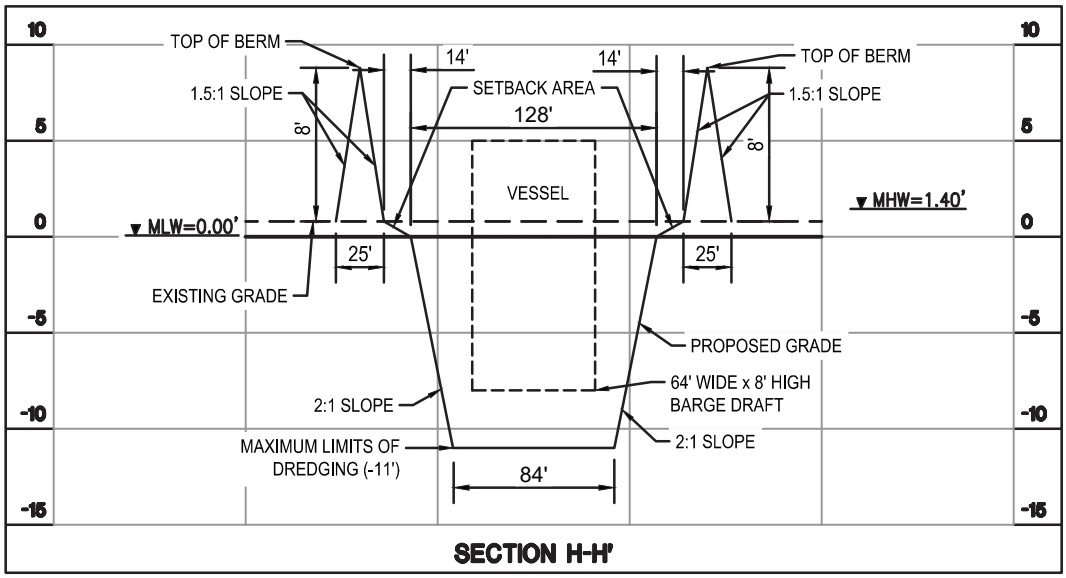

SECTION H-H'

NOTES:
1. THE DREDGING TEMPLATE IS 2' BELOW MAX VESSEL DRAFT TO ALLOW FOR TRANSIT OF TUGS AND DRILL BARGE AT LOW TIDE WITH A 1' OF DREDGE OVER DEPTH.
2. MHW & MLW ARE PROVIDED IN NAVD 88.
3. THE MHW & MLW ELEVATION PROVIDED IS BASED ON HOBO DATA LOGGERS INSTALLED WITHIN THE PROJECT FOOTPRINT AREA.
4. WATER LEVEL DATA IS ACTIVELY BEING COLLECTED AND DATA MAY BE REVISED BASED ON THE DATA PROVIDED.

VERTICAL
SCALE IN FEET



HORIZONTAL
SCALE IN FEET



* SECTION LOCATION DENOTED ON SHEET 2

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

PROJECT CROSS SECTIONS

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA

FOR ExxonMobil Low Carbon Solutions Onshore Storage LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY


PROJECT NO. 22-1944

PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023


CHECKED TH
DRAWN BY AMR

SHEET
9 of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.

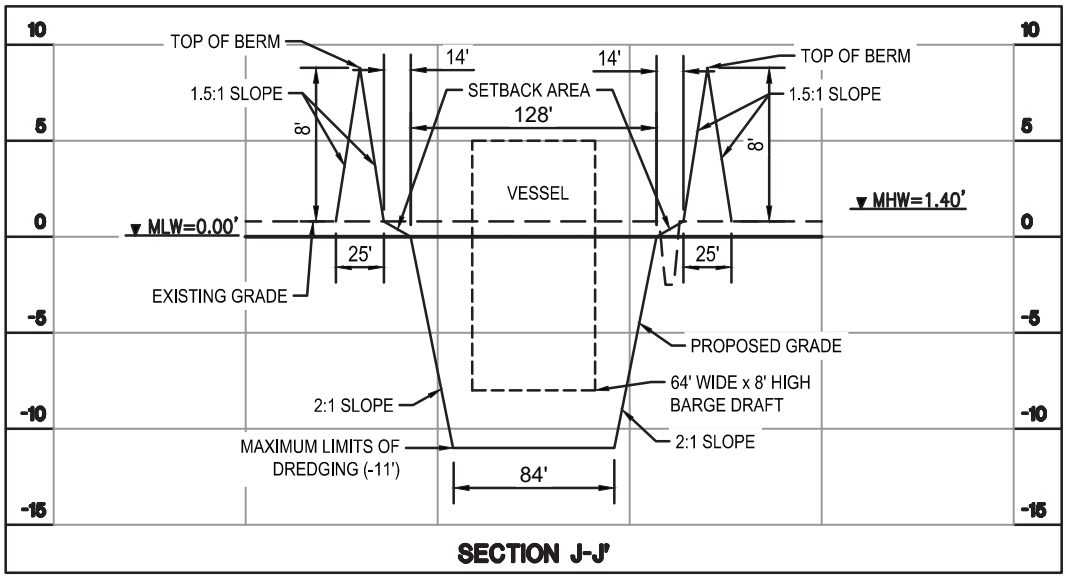

SECTION J-J'

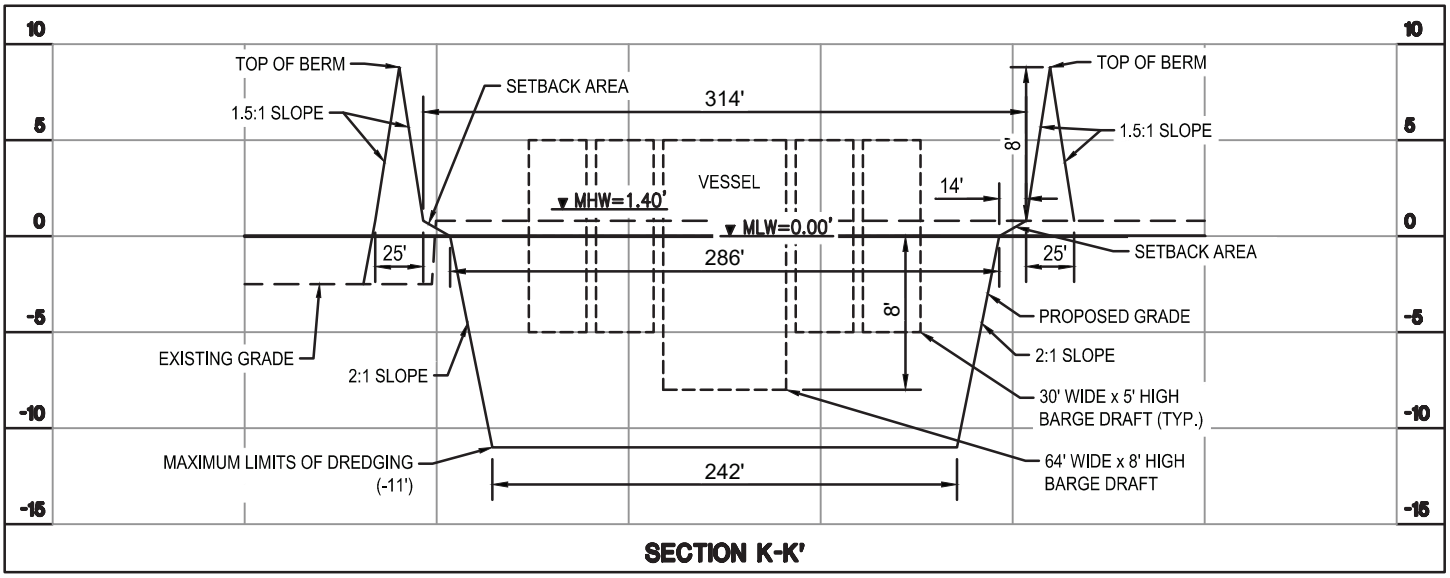

SECTION K-K'

NOTES:
1. THE DREDGING TEMPLATE IS 2' BELOW MAX VESSEL DRAFT TO ALLOW FOR TRANSIT OF TUGS AND DRILL BARGE AT LOW TIDE WITH A 1' OF DREDGE OVER DEPTH.
2. MHW & MLW ARE PROVIDED IN NAVD 88.
3. THE MHW & MLW ELEVATION PROVIDED IS BASED ON HOBO DATA LOGGERS INSTALLED WITHIN THE PROJECT FOOTPRINT AREA.
4. WATER LEVEL DATA IS ACTIVELY BEING COLLECTED AND DATA MAY BE REVISED BASED ON THE DATA PROVIDED.

VERTICAL
SCALE IN FEET

10 5 0 10

HORIZONTAL
SCALE IN FEET

100 50 0 100

* SECTION LOCATION DENOTED ON SHEET 2

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

PROJECT CROSS SECTIONS

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA

FOR ExxonMobil Low Carbon Solutions Onshore Storage LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY


PROJECT NO. 22-1944

PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR


SHEET
10 of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.

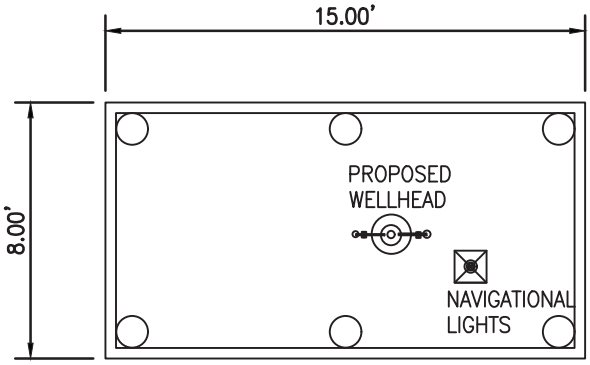

WELLHEAD PLATFORM PLAN

SCALE: N.T.S.

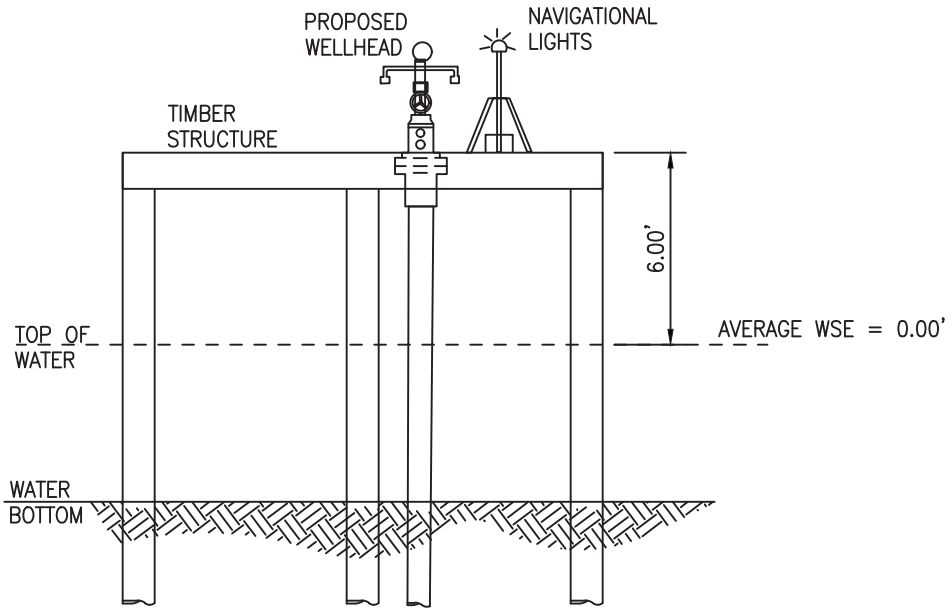

WELLHEAD PLATFORM ELEVATION

SCALE: N.T.S.

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

PLATFORM DETAIL

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA

FOR ExxonMobil Low Carbon Solutions Onshore Storage, LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY


PROJECT NO. 22-1944

PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR

SHEET
11 of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.

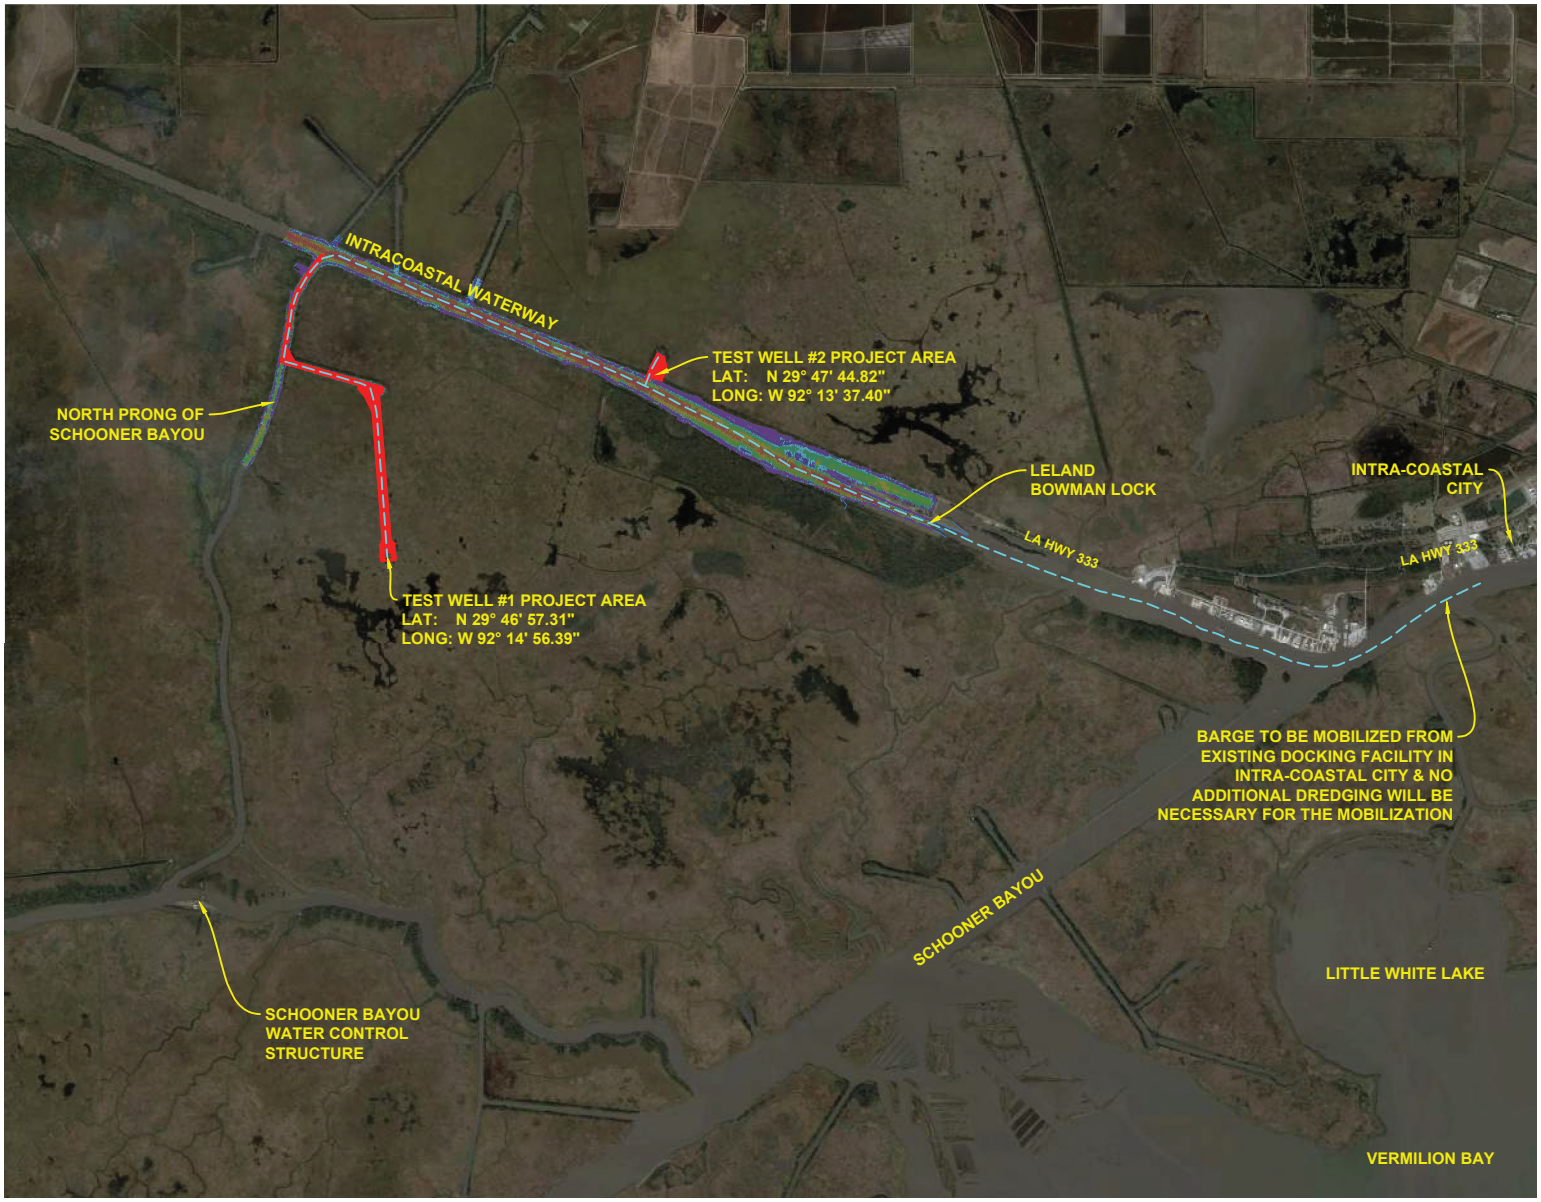

Elevations Table			
Number	Minimum Elevation	Maximum Elevation	Color
1	−23.1	−16.4	
2	−16.4	−13.3	
3	−13.3	−11.4	
4	−11.4	−8.8	
5	−8.8	−5.7	
6	−5.7	−3.7	
7	−3.7	−2.9	
8	−2.9	1.4	

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

BARGE ACCESS PLAN

SCALE IN FEET

5000 2500 0 5000

N

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA

FOR ExxonMobil Low Carbon Solutions Onshore Storage, LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944

PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR

SHEET
12 of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.

OPERATION:	VESSEL TYPES	DRAFT DEPTH (FT)	ESTIMATED TRIPS
CONSTRUCTION	TUG BOAT	8	1 - 2 / DAILY
	TUG BOAT (PROP-WASH)	8.5	1 - 2 / DAILY
	BARGE CRANE	8	WEEKLY
	BARGE CONSTRUCTION	8	2 TOTAL PROJECT
	BARGE LIGHT LOAD BARGE	6	1-2 / DAILY FOR 10-12 DAYS
	PILE DRIVING BARGE	8	2 TOTAL PROJECT
DRILLING	DRILLING RIG TO BE NAMED	7-8	1-2 MOBILIZATION AND 1-2 DEMOBILIZATION PER WELL
	BARGE - FLAT DECK (120' x 30')	7	DAILY
	BARGE - FLUIDS / LIQUID MUD	8	WEEKLY
	ACCOMMODATIONS BARGE - TO BE NAMED	8	1-2 MOBILIZATION AND 1-2 DEMOBILIZATION PER WELL
	CREW BOAT	6	WEEKLY
	TUG	6	DAILY

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

VESSEL DATA

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA

FOR ExxonMobil Low Carbon Solutions Onshore Storage, LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY


PROJECT NO. 22-1944

PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR

SHEET
13 of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.

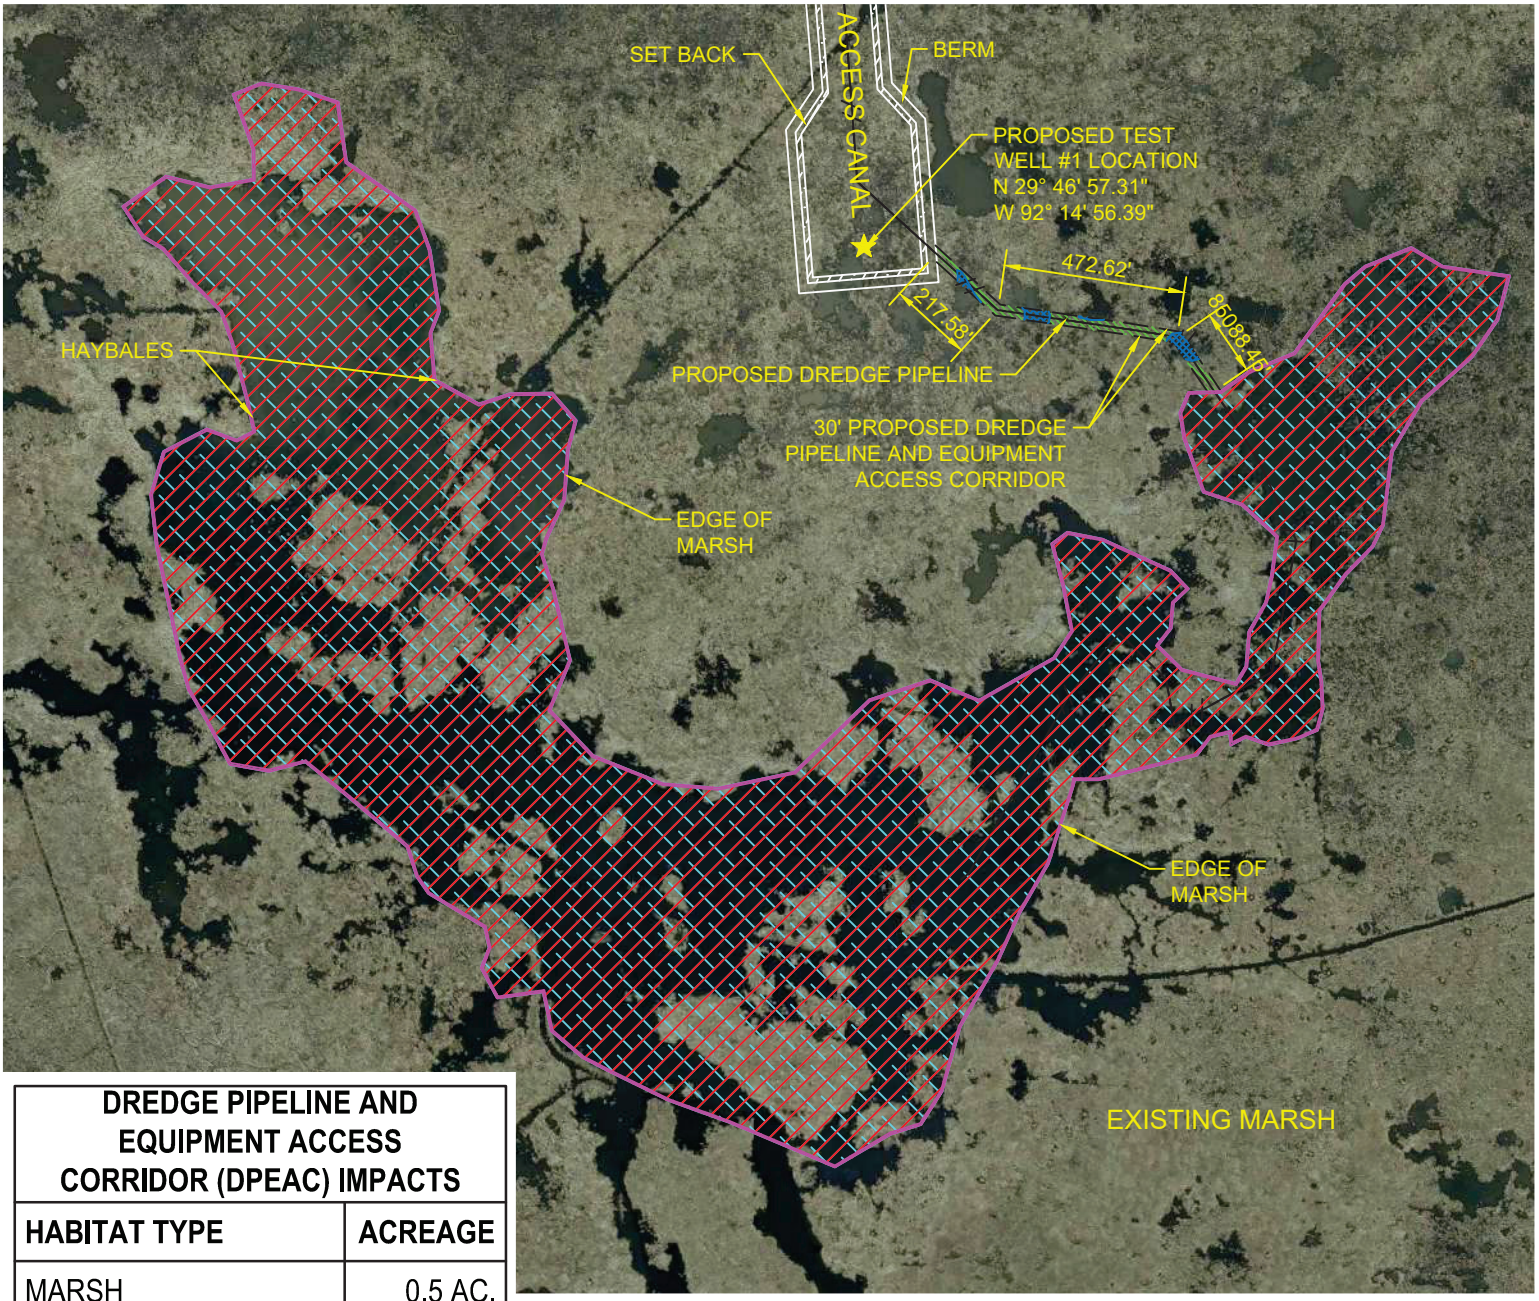

DREDGE PIPELINE AND EQUIPMENT ACCESS CORRIDOR (DPEAC) IMPACTS	
HABITAT TYPE	**ACREAGE**
MARSH	0.5 AC.
OPEN WATER	0.1 AC.

DPEAC MARSH

DPEAC OPEN WATER

BUDM AREA
78.5 ACRES_ 284,905.8 CY

HAYBALES

SPECIAL NOTES:

- CONTAINMENT DIKE CREATED IN OPEN WATER AREA.
- BORROW FOR CONTAINMENT TO COME FROM OPEN WATER AREA IN FRONT OF DIKE.

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

BUDM SITE PLAN

SCALE IN FEET

1000 500 0 1000

N

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA
FOR ExxonMobil Low Carbon Solutions Onshore Storage LLC


PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944
PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023


CHECKED TH
DRAWN BY AMR

SHEET
16 of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.

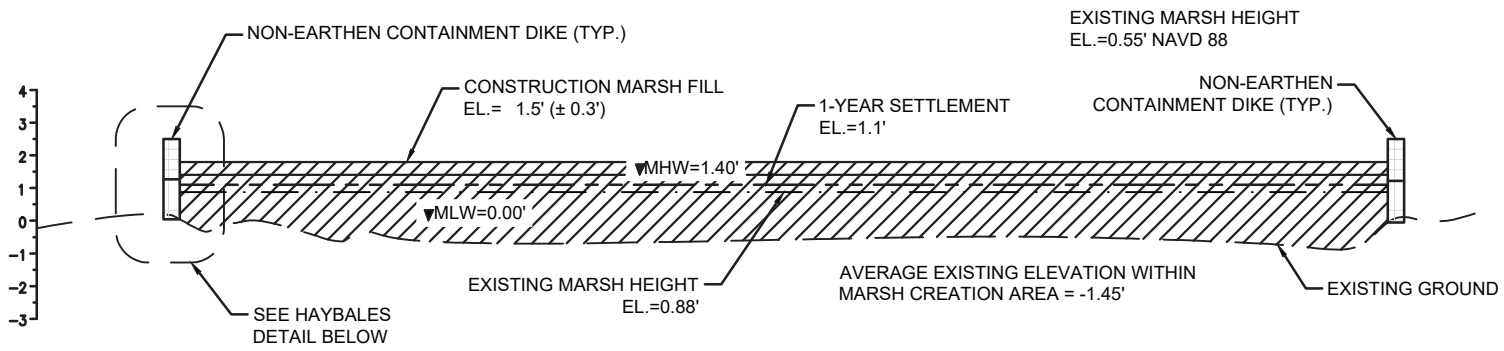

* TARGET 1-YEAR SETTLEMENT ELEVATION @ 1.1'

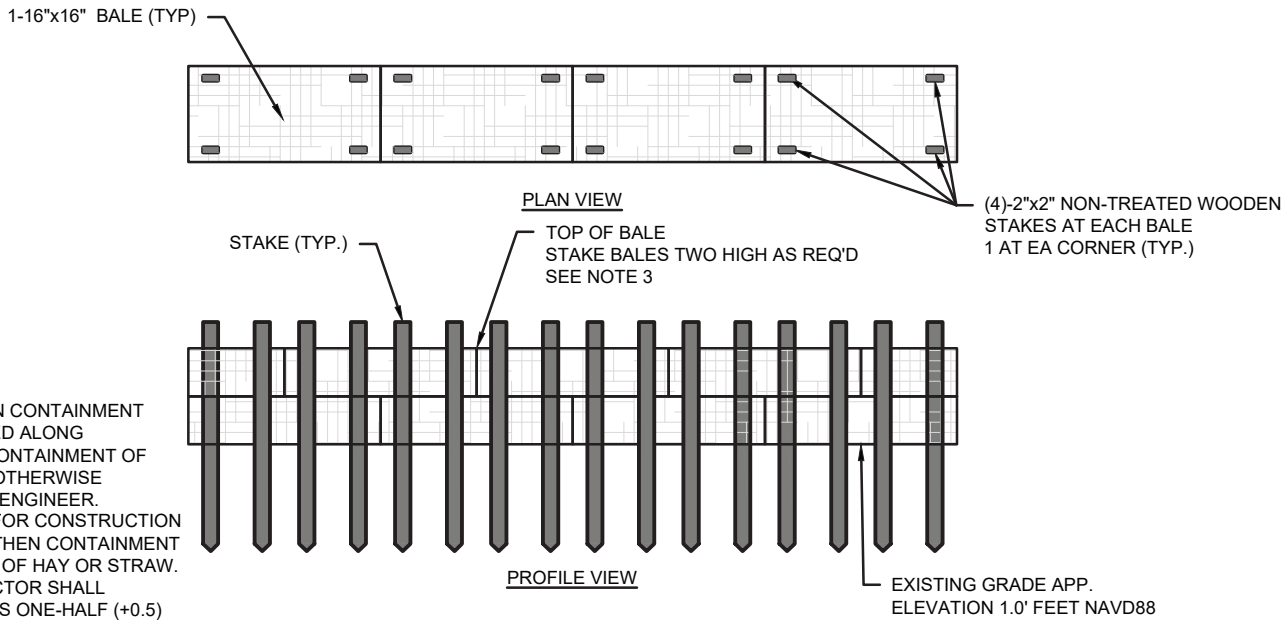

NOTES:

1. NON-EARTHEN CONTAINMENT SHALL BE USED ALONG PERIMETER CONTAINMENT OF BUDM OR AS OTHERWISE DIRECTED BY ENGINEER.
2. BALES USED FOR CONSTRUCTION OF NON- EARTHEN CONTAINMENT MAY CONSIST OF HAY OR STRAW.
3. THE CONTRACTOR SHALL MAINTAIN PLUS ONE-HALF (+0.5) FOOT OF FREEBOARD BETWEEN THE CREST OF THE CONTAINMENT AND THE RESPECTIVE CONSTRUCTION MARSH FILLED ELEVATION.

NON-EARTHEN CONTAINMENT DETAIL
N.T.S.

LEGEND

- **BUDM AREA**
- **NON-CONTAINMENT DIKE (HAYBALES)**
- **EXISTING GROUND**
- **PROPOSED FILL ELEVATION**
- **1-YEAR SETTLEMENT ELEVATION**
- **EXISTING MARSH HEIGHT**

NOTE:

- MHW & MLW ARE PROVIDED IN NAVD 88.
- ALL ELEVATIONS ARE PROVIDED IN NAVD 88.

PRELIMINARY
FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

MARSH CREATION SECTIONS

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET
VERMILION PARISH, LOUISIANA
FOR ExxonMobil Low Carbon Solutions Onshore Storage LLC


PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944
PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR


SHEET
17 of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.

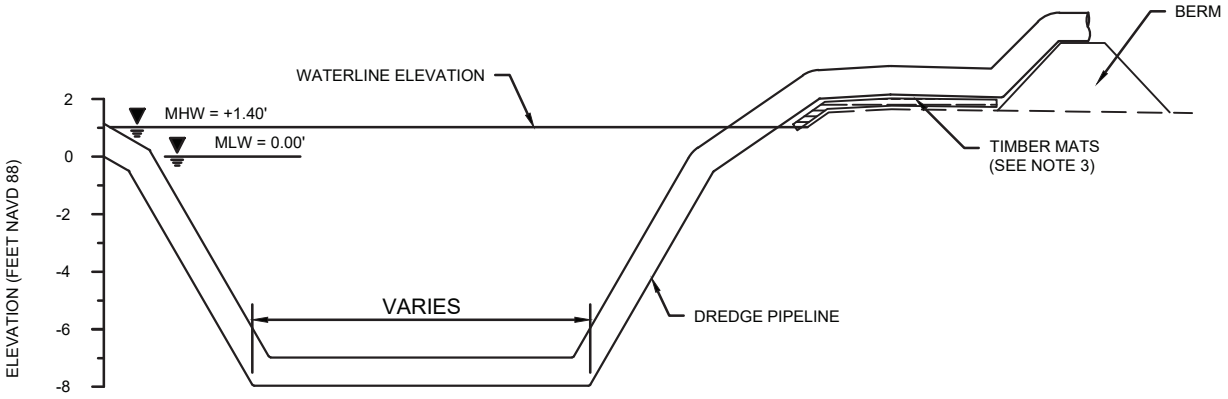


SUBMERDGED PIPELINE CROSSING

SCALE: N.T.S.

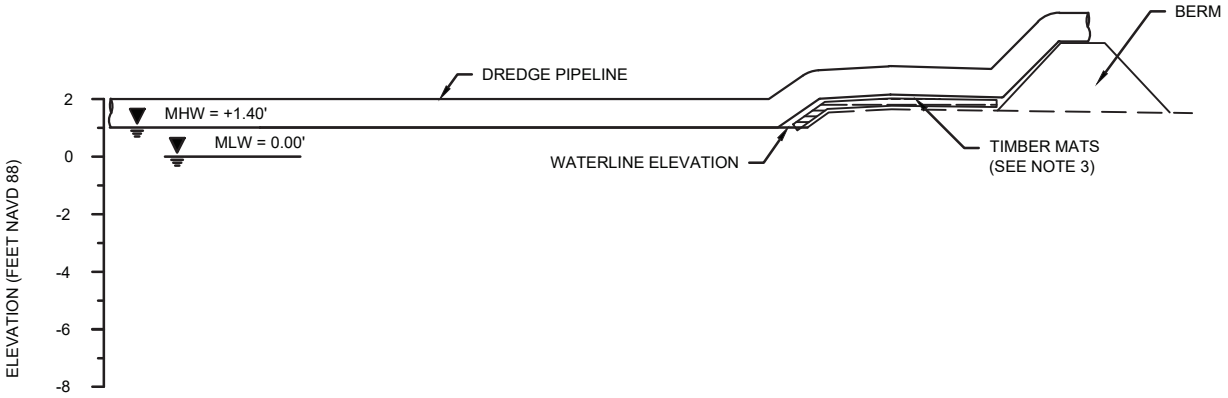

FLOATING PIPELINE CROSSING

SCALE: N.T.S.

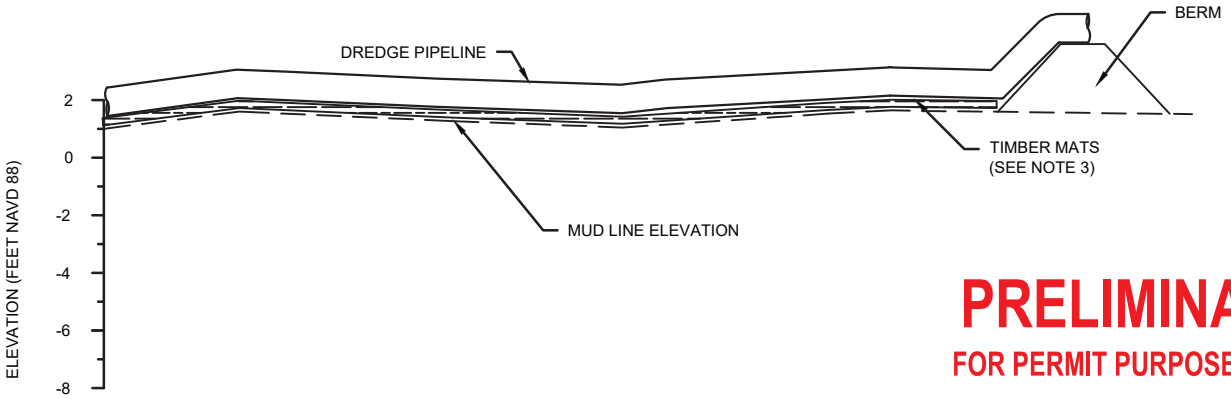

PRELIMINARY

FOR PERMIT PURPOSES ONLY

Kainen T. LeBlanc
LA PE #34314
Duplantis Design Group, P.C.

ABOVEGROUND PIPELINE CROSSING

SCALE: N.T.S.

NOTES:

1. THIS DETAIL SHALL APPLY TO ALL LOCATIONS WHERE DREDGE PIPELINE CROSSES EXISTING WATERWAYS AND WHERE DREDGE PIPELINE AND EQUIPMENT CROSSES EXISTING MARSH OUTSIDE OF BUDM.
2. CONTRACTOR SHALL CONDUCT A PRE-CONSTRUCTION SURVEY OF LOCATIONS WHERE TIMBER MATS ARE TO BE INSTALLED TO INCLUDE SHOTS AT EACH CORNER OF MAT AND ALONG MAT CENTERLINE.

PIPELINE CROSSING TYPICAL SECTIONS

DDG
314 EAST BAYOU ROAD | THIBODAUX, LA.
985.447.0090

PERMIT SET

VERMILION PARISH, LOUISIANA

FOR ExxonMobil Low Carbon Solutions Onshore Storage LLC

PRELIMINARY FOR PERMIT PURPOSES ONLY

PROJECT NO. 22-1944

PECAN ISLAND AREA TEST WELLS
JPA REVISION 4
07/26/2023

CHECKED TH
DRAWN BY AMR

SHEET

18 of 18

© 2022 DUPLANTIS DESIGN GROUP, P.C.